

LED PAR20 120V Lamp G0091-1




Features and Benefits

- Direct Replacement for 40-Watt Incandescent Lamp
- 10 x 1W High Power WLED White LEDs
- 5000 to 8,000K CCT
- 2000 to 10,000K CCT (Optional)
- Energy Efficient
- Extreme Long Life (Up to 100,000 Hours)
- Low Heat
- No UV
- Industrial Grade Components for Enhanced Performance and Lifetime.
- Constructed of high grade ABS and Plated Aluminum Alloy
- Copper Conductive base (Low Resistance)
- Optimized Heat Dissipation Efficiency
- Optical Grade PMMA Acrylic Lenses
- 40° Beam Angle
- Shatterproof and Fireproof

Specifications

Qty. of LEDs	10 x 1W High Power WLED (White LEDs)
Beam Angle	40°
Output Power	10W (Comparable to 40W Incandescent)
Luminous Flux	430Lm
Lamp Base	E26
CCT(K)	5000~8000K
Input Voltage	120V AC
Operating Environment	-20-40°C
Dimensions(mm)	95 H x 64.5dia

Candle Power Distribution

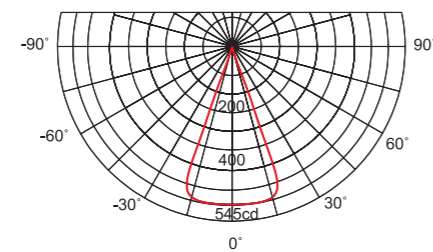

- Now available in WLED (White LED) Warm and Ultra Warm White with CCT(K) from 2,000 to 5,000K. (Not shown)



LED PAR30 120V Lamp G0101-1




Features and Benefits

- Direct Replacement for 60-Watt Incandescent Lamp
- 15 x 1W High Power WLED White LEDs
- 5000 to 8,000K CCT
- 2000 to 10,000K CCT (Optional)
- Energy Efficient
- Extreme Long Life (Up to 100,000 Hours)
- Low Heat
- No UV
- Industrial Grade Components for Enhanced Performance and Lifetime.
- Constructed of high grade ABS and Plated Aluminum Alloy
- Copper Conductive base (Low Resistance)
- Optimized Heat Dissipation Efficiency
- Optical Grade PMMA Acrylic Lenses
- 40° Beam Angle
- Shatterproof and Fireproof

Specifications



Qty. of LEDs	15 x 1W High Power WLED (White LEDs)
Beam Angle	40°
Output Power	15W (Comparable to 60W Incandescent)
Luminous Flux	554Lm
Lamp Base	E26
CCT(K)	5000~8000K
Input Voltage	120V AC
Operating Environment	-20-40°C
Dimensions(mm)	91 H x 90.5dia

Candle Power Distribution


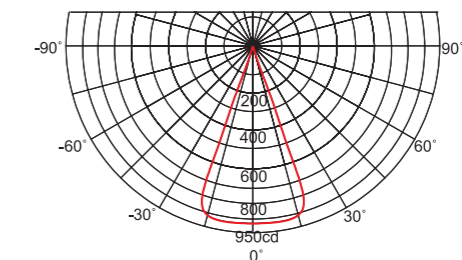


- PAR30 Lamp is for indoor use only.
- Wait until the lamp cools when replacing the lamp.

Dimensional Diagrams



Dimensional Diagrams



LED PAR20 240V Lamp G0091




Features and Benefits

- Direct Replacement for 40-Watt Incandescent Lamp
- 10 x 1W High Power WLED White LEDs
- 5000 to 8,000K CCT
- 2000 to 10,000K CCT (Optional)
- Energy Efficient
- Extreme Long Life (Up to 100,000 Hours)
- Low Heat
- No UV
- Industrial Grade Components for Enhanced Performance and Lifetime.
- Constructed of high grade ABS and Plated Aluminum Alloy
- Copper Conductive base (Low Resistance)
- Optimized Heat Dissipation Efficiency
- Optical Grade PMMA Acrylic Lenses
- 40° Beam Angle
- Shatterproof and Fireproof

Specifications

Qty. of LEDs	10 x 1W High Power WLED (White LEDs)
Beam Angle	40°
Output Power	10W (Comparable to 40W Incandescent)
Luminous Flux	430Lm
Lamp Base	E27
CCT(K)	5000~8000K
Input Voltage	240V AC
Operating Environment	-20-40°C
Dimensions(mm)	95 H x 64.5dia

Candle Power Distribution

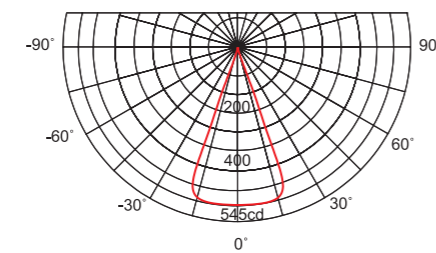

• Now available in WLED (White LED) Warm and Ultra Warm White with CCT(K) from 2,000 to 5,000K. (Not shown)



LED PAR30 240V Lamp G0101




Features and Benefits

- Direct Replacement for 60-Watt Incandescent Lamp
- 15 x 1W High Power WLED White LEDs
- 5000 to 8,000K CCT
- 2000 to 10,000K CCT (Optional)
- Energy Efficient
- Extreme Long Life (Up to 100,000 Hours)
- Low Heat
- No UV
- Industrial Grade Components for Enhanced Performance and Lifetime.
- Constructed of high grade ABS and Plated Aluminum Alloy
- Copper Conductive base (Low Resistance)
- Optimized Heat Dissipation Efficiency
- Optical Grade PMMA Acrylic Lenses
- 40° Beam Angle
- Shatterproof and Fireproof


Specifications

Qty. of LEDs	15 x 1W High Power WLED (White LEDs)
Beam Angle	40°
Output Power	15W (Comparable to 60W Incandescent)
Luminous Flux	554Lm
Lamp Base	E27
CCT(K)	5000~8000K
Input Voltage	240V AC
Operating Environment	-20-40°C
Dimensions(mm)	91 H x 90.5dia


Candle Power Distribution

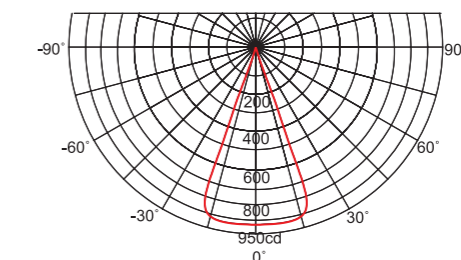

Dimensional Diagrams

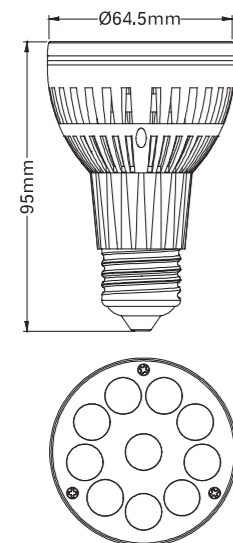

Dimensional Diagrams

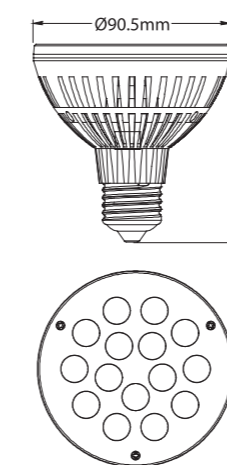

LED MR16 Lamp G0071




Features and Benefits

- Direct Replacement for 25-Watt Incandescent Lamp
- 6 x 1W High Power WLED White LEDs
- 5000 to 8,000K CCT
- 2000 to 10,000K CCT (Optional)
- Energy Efficient
- Extreme Long Life (Up to 100,000 Hours)
- Low Heat
- No UV
- Industrial Grade Components for Enhanced Performance and Lifetime.
- Constructed of high grade ABS and Plated Aluminum Alloy
- Copper Conductive base (Low Resistance)
- Optimized Heat Dissipation Efficiency
- Optical Grade PMMA Acrylic Lenses
- 40° Beam Angle
- Shatterproof and Fireproof

Specifications

Qty. of LEDs	6 x 1W High Power WLED (White LEDs)
Beam Angle	40°
Output Power	6W (Comparable to 25W Incandescent)
Luminous Flux	224Lm
Lamp Base	GU5.3 / G5.3
CCT(K)	5000~8000K
Input Voltage	12V AC
Operating Environment	-20-40°C
Dimensions(mm)	62 H x 50dia

Candle Power Distribution


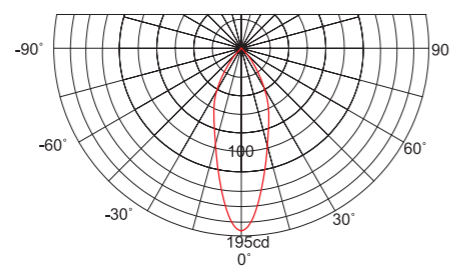


Now available in WLED (White LED) Warm and Ultra Warm White with CCT(K) from 2,000 to 5,000K.
(Not shown)



INDOOR USE

Dimensional Diagrams



LED MR16 Lamp (Sound Control) G0081


Features and Benefits

- Direct Replacement for 25-Watt Incandescent Lamp
- 6 x 1W High Power WLED White LEDs
- 5000 to 8,000K CCT
- 2000 to 10,000K CCT (Optional)
- Sound Sensing On/Off
- Selectable Sound Sensitivity (3 Dip Setting)
- Energy Efficient
- Extreme Long Life (Up to 100,000 Hours)
- Low Heat
- No UV
- Industrial Grade Components for Enhanced Performance and Lifetime.
- Constructed of high grade ABS and Plated Aluminum Alloy
- Copper Conductive base (Low Resistance)
- Optimized Heat Dissipation Efficiency
- Optical Grade PMMA Acrylic Lenses
- 40° Beam Angle
- Shatterproof and Fireproof

Specifications

Qty. of LEDs	6 x 1W High Power WLED (White LEDs)
Beam Angle	40°
Output Power	6W (Comparable to 25W Incandescent)
Luminous Flux	224Lm
Lamp Base	GU5.3 / G5.3
CCT(K)	5000~8000K
Input Voltage	12V AC
Operating Environment	-20-40°C
Dimensions(mm)	62 H x 50dia


Candle Power Distribution

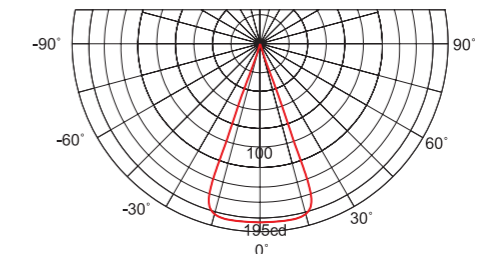

Sound Sensitivity Adjustment

There are 3 adjustable sound sensitivity levels to set the amount of sound required to turn the lamp on and off. When no one is in the room and no sound is present the lamp will automatically turn off to save energy and LED life. The sensitivity level is normally set to low from the factory.

Dimensional Diagrams

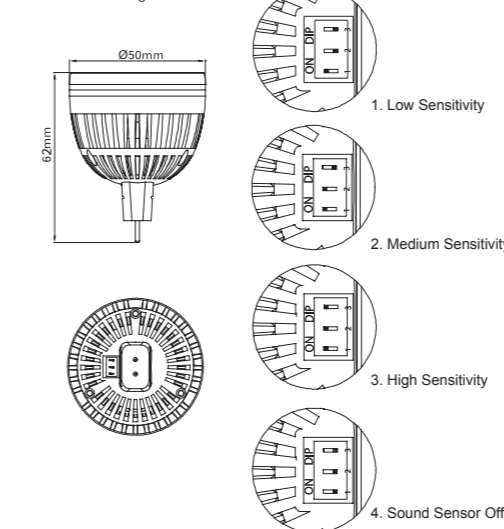

INDOOR USE