



Patented (China)  
Patent Pending (Globally)

# LED Pro Wash RGB/AW

(High Power LED)  
(Outdoor)(Direct DMX)  
SRL-6349/SRL-6349W

LED Pro Wash RGB is a professional, energy savings, high power, architectural / architainment, stage, commercial, club, wash fixture which covers all the applications where smooth, rich color wash is required.

The LED Pro Wash RGB contains 24 3W and 1W RGB Power LEDs to enable 16.7M true 24-Bit linear color control.

The LED Pro Wash RGB from Neo-Neon incorporates all of the functionality required to be applied professionally. With 5 program cues available, each program can contain a maximum of 10 scenes with 36 timed events that can be set to any desired clock time.

The LED Pro Wash RGB also has a built in thermal sensor to enable operations below 60°C. Whether operated with DMX-512, Stand-alone or, via the built in sophisticated "yet simple to operate" 1 time/scene selection system the LED Pro Wash RGB delivers professional results.

Correlatively, there is LED Pro Wash AW which adopts Amber and White LED and functions as color temperature adjustable.

### Various colors



### Specifications(SRL-6349)

5 program editions available, each program can have max 10 scenes.  
36 time-burst events can be set, every event can be set any time.  
Built-in thermo sensor unit ensures the lamps will be working under 60°C

|                 |   |
|-----------------|---|
| Voltage         | 100-120V AC/60Hz 220-240V/50Hz                                |
| Totally of LEDs | High Power LEDs, Red 24pcs 1W<br>Green 18pcs 3W, Blue 7pcs 3W |
| Dimension(mm)   | L376XW232XH432  |
| Weight          | 13.5 kg   |

### Specifications (SRL-6349W)

5 program editions available, each program can have max 10 scenes.  
36 time-burst events can be set, every event can be set any time.  
Built-in thermo sensor unit ensures the lamps will be working under 60°C  
Sound Active, Auto, DMX, Linking

|             |   |
|-------------|---|
| Voltage     | 110V-220V; 60HZ/50HZ                          |
| Qty of LEDs | 42 White LED'S 3W 25°<br>3 Amber LED'S 3W 25° |
| Dimension   | L367 x W232 x H432mm                          |
| Weight      | 13.5 kg                                       |

### DMX Value Channels 8

|                                |   |        |       |
|--------------------------------|---|--------|-------|
| <b>1 Shutter/Strobe</b>        |   |        |       |
| 0 - 7                          | Shutter closed  |        |       |
| 8 - 15                         | Shutter open  |        |       |
| 16 - 151                       | Linear Strobe frequency adjustment from 1-20 Hz                         |        |       |
| 152 - 159                      | Pulse open effect low speed   |        |       |
| 160 - 167                      | Pulse open effect medium speed  |        |       |
| 168 - 175                      | Pulse open effect high speed  |        |       |
| 176 - 183                      | Pulse close effect low speed  |        |       |
| 184 - 191                      | Pulse close effect medium speed   |        |       |
| 192 - 199                      | Pulse close effect high speed   |        |       |
| 200 - 207                      | Random strobe effect low speed  |        |       |
| 208 - 215                      | Random strobe effect medium speed                                       |        |       |
| 216 - 223                      | Random strobe effect high speed   |        |       |
| 224 - 255                      | Shutter open  |        |       |
| <b>2 Dimmer</b>                | 0—255   | 3 Red  | 0—255 |
| <b>4 Green</b>                 | 0—255   | 5 Blue | 0—255 |
| <b>6 Colour temperature</b>    |   |        |       |
| 0 - 19                         | OFF   |        |       |
| 20 - 255                       | From Cold + 2000 K° to Warm - 2000 K° compared to balanced white or not |        |       |
| <b>7 Macro channe</b>          |   |        |       |
| 0 - 7                          | NO MACRO  |        |       |
| 8 - 15                         | MACRO 1 Rainbow Slow - Hold Time 5 sec                                  |        |       |
| 16 - 23                        | MACRO 2 Rainbow Medium - Hold Time 5 sec                                |        |       |
| 24 - 31                        | MACRO 3 Rainbow Fast - Hold Time 5 sec                                  |        |       |
| 32 - 39                        | MACRO 4 Rainbow Slow - NO Hold time                                     |        |       |
| 40 - 47                        | MACRO 5 Rainbow Medium - NO Hold time                                   |        |       |
| 48 - 55                        | MACRO 6 Rainbow Fast - NO Hold time                                     |        |       |
| 56 - 63                        | MACRO 7 Rainbow Very slow - NO Hold time                                |        |       |
| 64 - 70                        | MACRO 8 Random Colour Slow  |        |       |
| 71                             | Store Colour-mode enable  |        |       |
| 72 - 79                        | MACRO 9 Random Color Medium   |        |       |
| 80 - 87                        | MACRO 10 Random Color Fast  |        |       |
| <b>8 White balance control</b> |   |        |       |
| 0 - 63                         | White balance disabled (Full Colour)                                    |        |       |
| 64 - 189                       | White balance enabled (Balanced)  |        |       |
| 190 - 250                      | White balance disabled (Full Colour)                                    |        |       |
| 251 - 255                      | User writable white balance   |        |       |




INDOOR USE

Specifications

|                 |  |
|-----------------|--|
| Light Source    | High Power LED   |
| Voltage         | AC 100-240V 50-60Hz  |
| Power           | 250W   |
| Qty of LEDs     | 30pcs of 1W Red LED<br>30pcs of 3W Green LED<br>30pcs of 1W Blue LED |
| PAN adjustable  | -15°-75°   |
| TILT adjustable | -50°-50°   |
| Optical Angle   | 25° & 10° available  |
| Dimension       | L984 x W232 x H337mm   |
| Weight          | 17.8 kg  |
| IP Rating       | IP65   |
| Control System  | DMX-512, Auto, Timed Playback  |
| DMX Channels    | 8 Channels   |

Features and Benefits

- Stand Alone Linkable
- 5 internal programs cues available
- Each program can contain a maximum of 10 scenes with 36 timed events that can be set to any desired clock time.
- Full Function DMX-512 control
- White-Balance adjustment with settings storage
- Professional Designed Housing which is completely adjustable
- Built in thermal sensor enables operation below 60°C
- Easy to understand user LED menu interface
- IP44

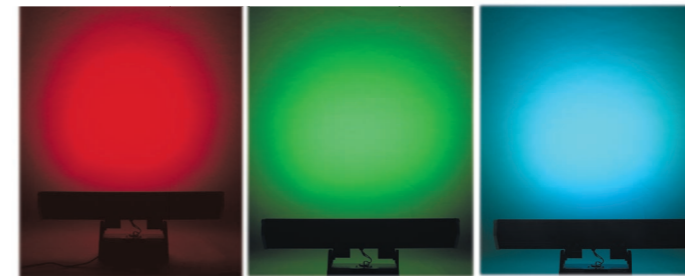

|                                 |   |
|---------------------------------|---|
| <b>CH1</b><br>Shutter/strobe    | 0 → 3 4 → 6 7 → 59 60 → 69 70 → 78 79 → 87 88 → 255<br>Shutter close <b>Open</b> Fade strobe open Fade strobe close <b>Open</b>   |
| <b>CH2</b><br>Dimmer            | 0 → 255<br>Dark → Brightest   |
| <b>CH3</b><br>Red               | 0 → 255<br>Dark → Red   |
| <b>CH4</b><br>Green             | 0 → 255<br>Dark → Green   |
| <b>CH5</b><br>Blue              | 0 → 255<br>Dark → Blue  |
| <b>CH6</b><br>Color temperature | 0 → 19 20 → 255<br>OFF From Cold+2000K° to Warm - 2000K° compared to balanced white or not  |
| <b>CH7</b><br>Macro             | 0 → 7 8 → 15 16 → 23 24 → 31 32 → 39 40 → 47<br>NO MACRO MACRO 1 MACRO 2 MACRO 3 MACRO 4 MACRO 5<br>48 → 55 56 → 63 64 → 70 71 → 72 79 → 79<br>MACRO 6 MACRO 7 MACRO 8 Store color mode enable MACRO 9<br>80 → 87 88 → 255<br>MACRO 10 NONE |
| <b>CH8</b><br>White balance     | 0 → 63 64 → 189 190 → 250 251 → 255<br>White balance disabled (Full color) White balance enabled (Balanced) White balance disabled (Full color) Store a new white balance   |

# LED Linear Pro Wash RGB (Direct DMX) LED-L-WS-RGB-10-6052 LED-L-WS-RGB-25-6052

LED Linear Pro Wash RGB is the latest addition to the LED Pro Wash Series. LED Linear Pro Wash RGB was designed by Neo-Neon™ to meet the professional needs of Architainment, Architectural, Stage, Commercial, TV Studio, Nightclub, markets as well as discerning lighting designers world-wide.

LED Linear Pro Wash RGB produces high power full color linear RGB LED wash effects.

LED Linear Pro Wash RGB produces high power full color linear RGB LED wash effects. The LED Linear Pro Wash RGB contains all the features you would expect to find in professional luminaries.



Patented (China)  
Patent Pending (Globally)



OUTDOOR USE