






Flexible LED Curtain Series

FLC-400

FLC-200

FLC-200A

FLC-100

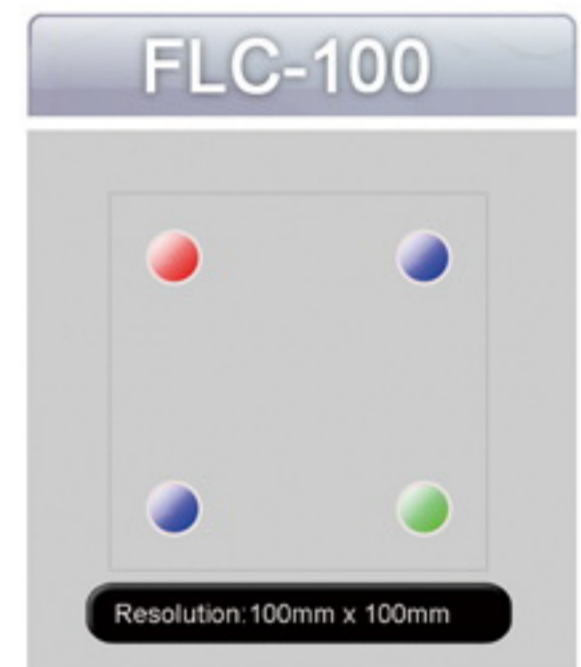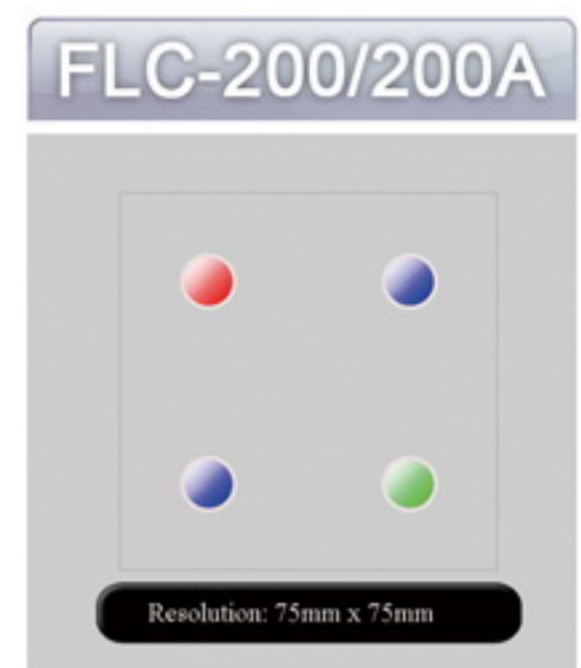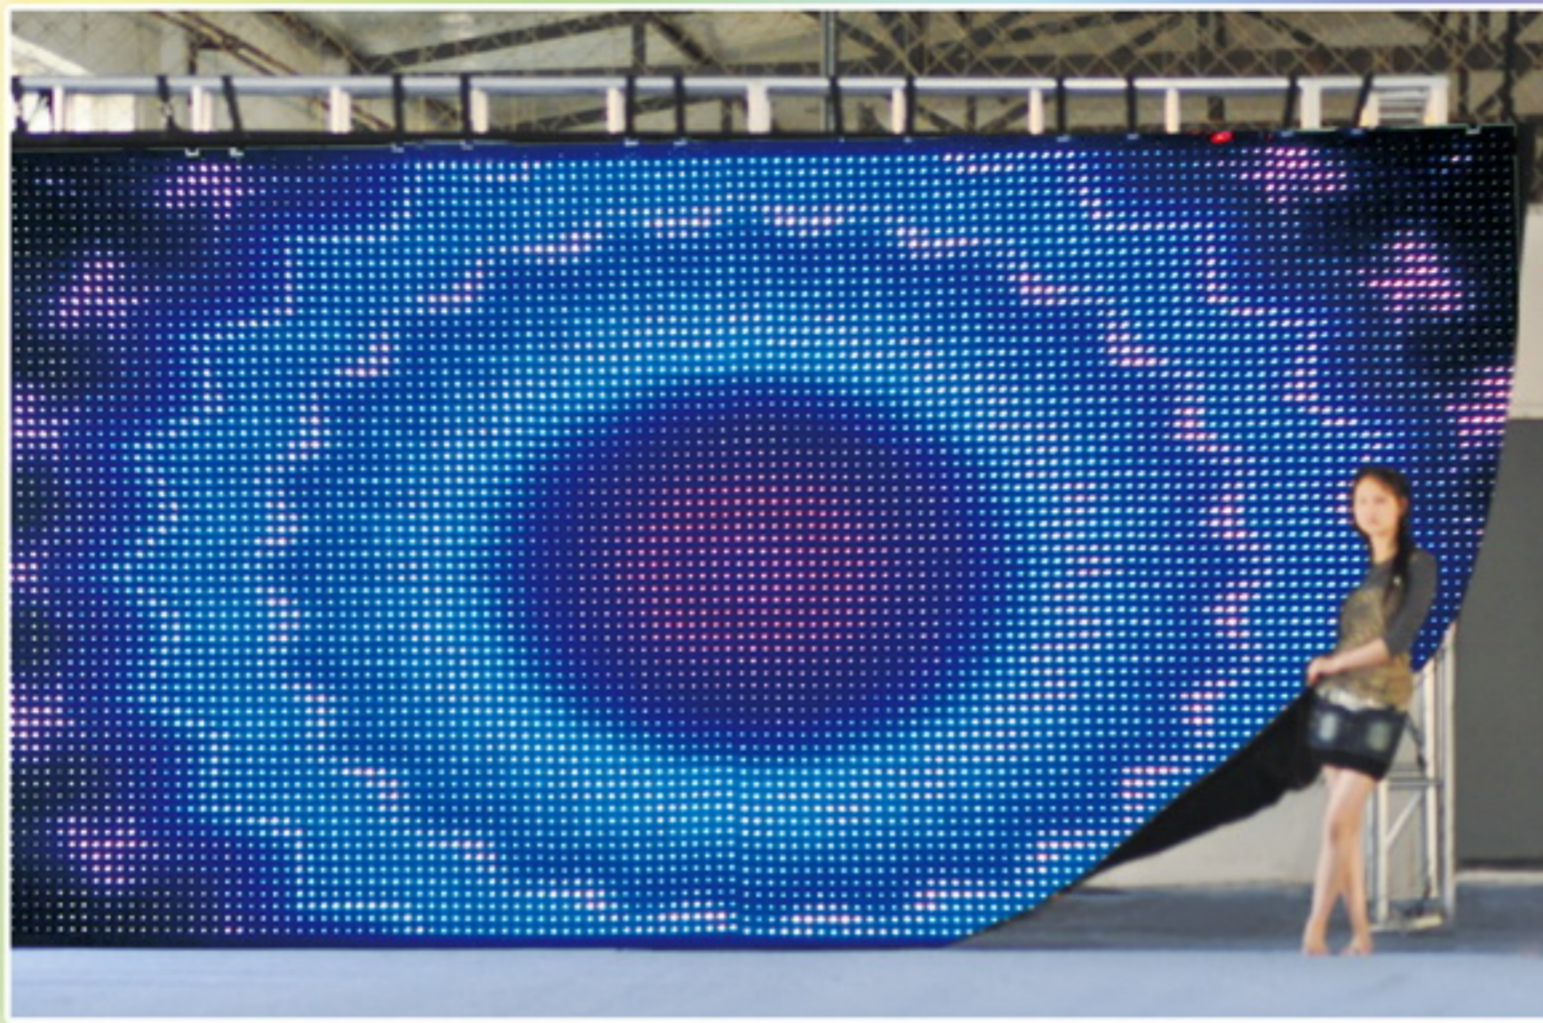

Specifications



Item	FLC-400	FLC-200	FLC-200A	FLC-100
Tech Data				
Resolution:	Pitch 50mm	Pitch 75mm	Pitch 75mm	Pitch 100mm
Density:	400 dots/ SQ.M	177 dots/ SQ.M	177 dots/ SQ.M	100 dots/ SQ.M
Pixel:	RGB 3-in-1 LED	RGB 3-in-1 LED	3R2G2B DIP LED	RGB 3-in-1 LED
Bit depth per pixel:	36 bit			
Viewing angle:	120° × 120°	120° × 120°	100° / 50°	120° × 120°
Service life:	80000 hours			
Brightness (white):	220 nits	86 nits	265 nits	55 nits
Brightness level:	16 levels			
Fresh frequency:	60Hz			
Innovation:	≥600Hz			
Drive mode:	constant current			
Control mode:	VGA synchronous display			
Display mode:	1024×768, 1280×1024			
Display port:	DVI			
Max...power consumption(White):	12W/ SQ.M	5W/ SQ.M	20W/ SQ.M	3W/ SQ.M
Average.power consumption:	6 W/ SQ.M	3W/ SQ.M	9W/ SQ.M	1.2W/ SQ.M
Weight:	2.7kgs/SQ.M	2.5kgs/SQ.M	2.5kgs/SQ.M	2.1kgs/SQ.M
Face material:	DFR velvet drapery			
Weather rating:	IP 44			
Optimal..visual distance:	35m	45m	45m	50m
Ambient..relative humidity:	10%~90%			
Working temperature:	-10 °C~50 °C			
Package:	Carton (Flight case optional)			
Recommendation Size:	Width:3.2m Height:3.2m (Size can be customized)	Width:2.4m Height:3.6m (Size can be customized)	Width:2.4m Height:3.6m (Size can be customized)	Width:3.2m Height:3.2m (Size can be customized)
Installation:	Hang			
Control system:	HC-101,HC-103 or HC-102			
Safety certificate	CE, FCC			

