# Accent Compact

Date:
Type:
Firm Name:
Project:

**RGBW, 315 mm (12.4 in), Translucent Lens**

## High-resolution exterior linear direct view luminaire with intelligent RGBW light

Accent Compact, RGBW is a direct view linear LED luminaire ideally suited for displaying large-scale video and graphics in a host of architectural settings. Accent Compact, RGBW adds a separate white LED, creating better-quality whites compared to RGB. Accent Compact, RGBW accepts Ethernet input from the PDS-400 48V EO to support long control runs not subject to DMX data and addressing limitations. Two lens choices are available for Accent Compact, RGBW: a clear lens which delivers the brightest output and a translucent lens which provides the widest viewing angle.

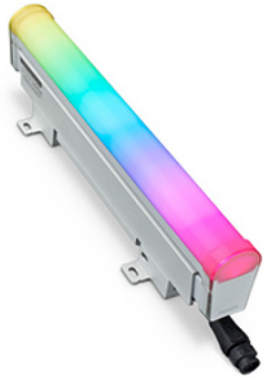

- Precise resolution control—Luminaires can be addressed and controlled in increments down to 19 mm (0.75 in), or up to 1220 mm (4 ft).
- Native, onboard Ethernet—Luminaires accept Ethernet input from PDS-400 48V EO to support long control runs not subject to DMX data and addressing limitations.
- Four luminaire lengths—315 mm (12.4 in), 467 mm (18.4 in), 619.5 mm (24.4), and 1228.5 mm (48.4 in) lengths are easily connected to create long, continuous columns or rows of intense, dynamic color. The 315 mm (12.4 in) luminaires in particular allow for extra flexibility when space is at a premium.
- Rugged, durable construction—This IP66-rated luminaire is designed to meet the taxing requirements of outdoor applications. The aluminium housing resists shock, vibration, and other forms of rough handling.
- Flexible positioning—Over-molded end-to-end locking connectors supply both power and data. Connectors can make 180° turns for easy layout. Jumper cables can add extra space between luminaires.
- Industry-leading controls—Works seamlessly with the complete Color Kinetics line of controllers, including Light System Manager and iPlayer 3, and any third-party controllers.
- Universal power input range—Accepts a universal power input range of 100 to 277 VAC for consistent installation anywhere in the world. Each 400 W, outdoor-rated PDS-400 48V EO can support multiple luminaires for creating long lines of video or ribbons of intricately changing color.
- ActiveSite integration—ActiveSite is the first ever cloud-hosted connected lighting system for architectural LED lighting installations. ActiveSite allows you to remotely monitor, manage, and maintain an installation site from anywhere in the world, using a secure web connection.

For detailed product information, please refer to the Accent Product Guide at www.colorkinetics.com/global/products/rgb/icolor-accent-compact-rgbw/

COLORKINETICS

# Specifications

Due to continuous improvements and innovations, specifications may change without notice.

## Output

| | |
|---|---|
| Viewing Angle | 210° |
| Lumens † | 248 |
| On-Axis Candela | 57 |
| On-Axis Candela per node | 3.5 |
| Efficacy (lm/W) §§ | 24.8 |
| LED Channels | Red/Green/Blue/4000 K |

## Electrical

| | |
|---|---|
| Input Voltage | 48 VDC via PDS-400 48V EO<br>or CM-400 48V EO |
| Power Consumption<br>(Maximum at full output, steady state) | 10 W |

For additional Surge Protection Requirements for LED Lighting Systems, please refer to www.colorkinetics.com/KB/surge-protection.

## Control

| | |
|---|---|
| Interface | PDS-400 48V EO (Ethernet)<br>CM-400 48V EO (Ethernet) |
| Control Channels | 4 channels per 19 mm (0.75 in) section |

For additional Control Channel information, please refer to https://colorkinetics.helpdocs.io/article/fv5rkpvclq.

### Control System

Color Kinetics full range of controllers, including Light System Manager, iPlayer 3, Antumbra iColor Keypad, and ColorDial Pro, or third-party controllers

Remote Monitoring & Management Works with Interact Landmark

## Lumen Maintenance

| Threshold§ | Ambient Temperature | Reported ¶¶ | Calculated ¶¶ |
|---|---|---|---|
| $L_{80}$ | 25 °C | > 66,000 | > 97,000 |
| | 50 °C | | |
| $L_{70}$ | 25 °C | > 66,000 | > 100,000 |
| | 50 °C | > 66,000 | > 100,000 |
| $L_{50}$ | 25 °C | > 66,000 | > 100,000 |
| | 50 °C | > 66,000 | > 100,000 |

## Physical

| | |
|---|---|
| Dimensions<br>(Height x Width x Depth) | 86.6 x 315 x 38 mm (3.4 x 12.4 x 1.5 in) |
| Weight | 0.63 kg (1.4 lb) |
| Housing Material | Extruded aluminium and polycarbonate |
| Lens | Translucent UV-protected polycarbonate |
| Luminaire Connections | Over-molded, integral male/female connectors |

### Temperature Ranges

-40 to 50 °C (-40 to 122 °F) Operating
-20 to 50 °C (-4 to 122 °F) Startup
-40 to 80 °C (-40 to 176 °F) Storage

### Vibration Resistance

Complies with ANSI C136.31, 3G

| | |
|---|---|
| Mechanical Impact | IK10 |

### Corrosion Resistance

Complies with ASTM B117 standard for > 1,500 hours

| | |
|---|---|
| Humidity | 0 to 95%, non-condensing |

### Maximum Luminaires Per Power/Data Supply

31 maximum per PDS-400 48V EO using a 15 m (50 ft) leader cable

## Certification and Safety

| | |
|---|---|
| Approbation | UL/cUL, FCC Class A, CE, CQC, RCM |
| Environment | Dry/Damp/Wet Location, IP66 |

For additional Energy Efficiency Class Information, please refer to https://colorkinetics.helpdocs.io/article/cviis2p8qq.

† 315 mm (12.4 in) lumen output measurements comply with IES LM-79-08 testing procedures. 610 mm (2 ft), and 1220 mm (4 ft) measurements are estimated based on the 305 mm (1 ft) measurements.

§ Lxx = xx% lumen maintenance (when light output drops below xx% of initial output). All values are given at B10, or the median value where 90% of the LED population is better than the reported or calculated lumen maintenance measurement.

¶ Minimum surge limits per IEC 61547, tested in accordance with IEC 61000-4-5.

§§ Efficacy measurements are estimated based on the 305 mm (1 ft) measurements.

¶¶ Lumen maintenance figures are based on lifetime prediction graphs supplied by LED source manufacturers. Whenever possible, figures use measurements that comply with IES LM-80-08 testing procedures. In accordance with TM-21-11, Reported values represent the interpolated value based on six times the LM-80-08 total test duration (in hours). Calculated values represent time durations that exceed six times the total test duration.

# Dimensions

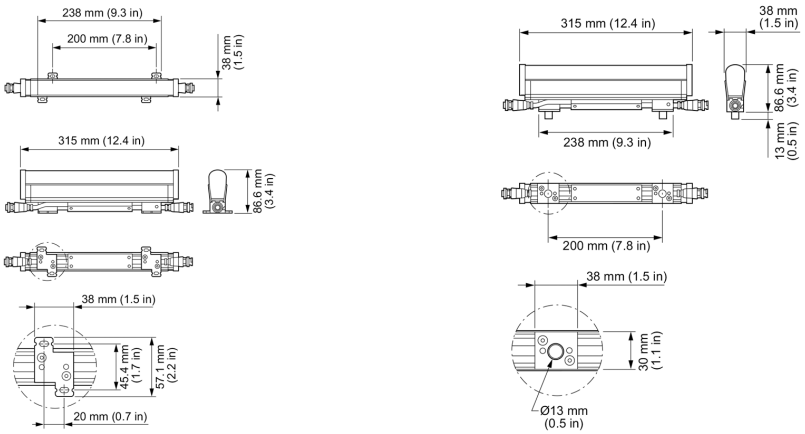


# Photometrics translucent lens, 315 mm (12.4 in)

Photometric data is based on test results from an independent NIST traceable testing lab. IES data is available at www.colorkinetics.com/global/support/ies.

| | |
|---|---|
| Viewing Angle | 210° |
| LED | All channels full on |
| Lumens | 248.0 |
| Efficacy (lm/W) | 24.8 |

## Polar Candela Distribution




| | 0 | 25 | 45 | 65 | 90 |
|---|---|---|---|---|---|
| 0 | 57 | 57 | 57 | 57 | 57 |
| 5 | 57 | 57 | 57 | 57 | 57 |
| 15 | 55 | 55 | 56 | 56 | 56 |
| 25 | 52 | 52 | 53 | 54 | 54 |
| 35 | 47 | 48 | 49 | 50 | 51 |
| 45 | 40 | 41 | 44 | 46 | 46 |
| 55 | 31 | 34 | 37 | 40 | 41 |
| 65 | 22 | 26 | 31 | 35 | 36 |
| 75 | 12 | 18 | 25 | 29 | 31 |
| 85 | 4 | 11 | 19 | 23 | 26 |
| 90 | 2 | 9 | 16 | 21 | 23 |

## Illuminance at Distance

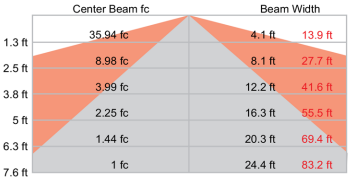


7.6 ft (2.3 m)
1 fc maximum distance

Vert. Spread: 116.5°
Horiz. Spread: 159.4°

## Zonal Lumen

| Zone | Lumens | % Luminaire |
|---|---|---|
| 0-30 | 45.6 | 18.40% |
| 0-40 | 76.2 | 30.70% |
| 0-60 | 142.6 | 57.40% |
| 60-90 | 72.9 | 29.40% |
| 70-100 | 56.8 | 22.90% |
| 90-120 | 29.4 | 11.80% |
| 0-90 | 215.5 | 86.80% |
| 90-180 | 32.8 | 13.20% |
| 0-180 | 248.2 | 100% |

For lux multiply fc by 10.7

## Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

| RCC %: | 80 | | | | 70 | | | | 50 | | | 30 | | | 10 | | 0 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| RW %: | 70 | 50 | 30 | 0 | 70 | 50 | 30 | 0 | 50 | 30 | 20 | 50 | 30 | 20 | 50 | 30 | 20 | 0 |
| RCR: | | | | | | | | | | | | | | | | | | |
| 0 | 1.16 | 1.16 | 1.16 | 1.16 | 1.12 | 1.12 | 1.12 | 0.87 | 1.04 | 1.04 | 1.04 | 0.97 | 0.97 | 0.97 | 0.9 | 0.9 | 0.9 | 0.87 |
| 1 | 1.03 | 0.97 | 0.91 | 0.86 | 0.98 | 0.93 | 0.88 | 0.67 | 0.86 | 0.82 | 0.79 | 0.8 | 0.77 | 0.74 | 0.74 | 0.72 | 0.69 | 0.66 |
| 2 | 0.92 | 0.83 | 0.75 | 0.68 | 0.88 | 0.8 | 0.72 | 0.54 | 0.74 | 0.68 | 0.63 | 0.68 | 0.64 | 0.59 | 0.63 | 0.59 | 0.56 | 0.53 |
| 3 | 0.83 | 0.72 | 0.63 | 0.55 | 0.8 | 0.69 | 0.61 | 0.45 | 0.64 | 0.57 | 0.51 | 0.59 | 0.54 | 0.49 | 0.55 | 0.5 | 0.46 | 0.43 |
| 4 | 0.76 | 0.63 | 0.53 | 0.46 | 0.73 | 0.61 | 0.52 | 0.38 | 0.56 | 0.49 | 0.43 | 0.52 | 0.46 | 0.41 | 0.49 | 0.43 | 0.39 | 0.36 |
| 5 | 0.7 | 0.56 | 0.46 | 0.39 | 0.66 | 0.54 | 0.45 | 0.33 | 0.5 | 0.43 | 0.37 | 0.47 | 0.4 | 0.35 | 0.44 | 0.38 | 0.33 | 0.31 |
| 6 | 0.64 | 0.5 | 0.41 | 0.34 | 0.61 | 0.48 | 0.4 | 0.28 | 0.45 | 0.37 | 0.32 | 0.42 | 0.35 | 0.3 | 0.39 | 0.34 | 0.29 | 0.27 |
| 7 | 0.59 | 0.45 | 0.36 | 0.3 | 0.57 | 0.44 | 0.35 | 0.25 | 0.41 | 0.33 | 0.28 | 0.38 | 0.32 | 0.27 | 0.36 | 0.3 | 0.26 | 0.23 |
| 8 | 0.55 | 0.41 | 0.32 | 0.26 | 0.53 | 0.4 | 0.31 | 0.22 | 0.37 | 0.3 | 0.25 | 0.35 | 0.28 | 0.24 | 0.33 | 0.27 | 0.23 | 0.21 |
| 9 | 0.51 | 0.37 | 0.29 | 0.23 | 0.49 | 0.36 | 0.28 | 0.2 | 0.34 | 0.27 | 0.22 | 0.32 | 0.26 | 0.21 | 0.3 | 0.25 | 0.2 | 0.18 |
| 10 | 0.48 | 0.34 | 0.26 | 0.21 | 0.46 | 0.33 | 0.26 | 0.18 | 0.32 | 0.25 | 0.2 | 0.3 | 0.24 | 0.19 | 0.28 | 0.23 | 0.19 | 0.17 |

# Luminaire and Accessories

Use Item Number when ordering in North America

| Luminaire | Item Number | Item 12NC |
|---|---|---|
| Accent Compact, RGBW, 315 mm (12.4 in), Translucent Lens | 101-000200-06 | 912400136255 |
| **Accessories** | | |
| Leader Cable, 15 m (50 ft) | 108-000200-00 | 912400133789 |
| Leader Cable, 30 m (100 ft) | 108-000200-01 | 912400133790 |
| Jumper Cable, 305 mm (1 ft) | 108-000200-03 | 912400134184 |
| Jumper Cable, 1.5 m (5 ft) | 108-000200-02 | 912400133791 |
| **Power Supplies** | | |
| PDS-400 48V, EO Power/Data Supply, Ethernet, UL | 109-000200-00 | 912400133799 |
| PDS-400 48V, EO Power/Data Supply, Ethernet, CE | 109-000200-01 | 912400134110 |
| CM-400 48V EO, Control Module, Ethernet | 109-000210-01 | 912400133802 |
| PS-600 48V, Power Supply, IP66 | 109-000220-00 | 912400133803 |
| PS-480 48V, Power Supply, IP20, DIN rail | 109-000220-01 | 912400133804 |

COLORKINETICS

© 2024 Signify Holding. All rights reserved. Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed.



02/16/2024