

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		8971.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of I _{max} At 50% of I _{max} At 90% of I _{max}	29.6V x 29.4H 17.4V x 17.3H 7.6V x 8.6H
Beam Flux	Total To 10% of I _{max} To 50% of I _{max} To 90% of I _{max}	1000.3 lumens per klm. 783.2 lumens per klm. 483.9 lumens per klm. 134.9 lumens per klm.
	Upward LOR Downward LOR	0.0 % 100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:qcl
Test Date:2013-12-16

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.0V I:0.6735A P:53.78W PF:0.6654 Lamp Flux:1065.01x1 lm		
NAME: LED Wall Washer 1B SRIES	TYPE:	WEIGHT:4.3kg
DIM.: L333xW147xH210mm	SPEC.:120V 30°	SERIAL No.:20131234
MFR.: TPK	SUR.:	PROTECTION ANGLE:

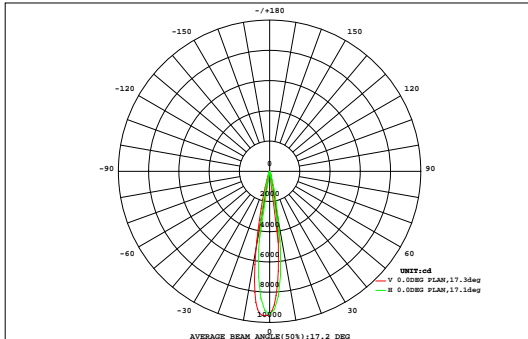

DATA OF LAMP		Eff:19.80lm/W	
MODEL	LWW-1B-36P	I _{max} (cd)	9555
NOMINAL POWER(W)	54	AVAILABILITY(%)	78.3
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	833.8
NOMINAL FLUX(lm)	1065.01	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1065
TEST VOLTAGE(V)	119.9	θ @50%(H,V)	17,17DEG


AREA FLUX DIAGRAM																		UNIT:lm		φ t	φ a			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.04	0.15	0.28	0.40	0.49	0.56	0.59	0.58	0.54	0.43	0.28	0.17	0.06	0.01	0.00	0.00	0.00	0.00	4.57	0.00		
40	0.00	0.01	0.08	0.21	0.35	0.50	0.64	0.77	0.83	0.83	0.72	0.56	0.38	0.25	0.11	0.02	0.00	0.00	0.00	6.26	0.00			
30	0.00	0.01	0.11	0.25	0.43	0.67	1.02	1.47	1.84	1.74	1.23	0.81	0.49	0.31	0.16	0.04	0.00	0.00	10.6	0.00				
20	0.00	0.02	0.14	0.28	0.49	0.99	1.84	3.37	4.68	4.28	2.70	1.31	0.65	0.36	0.20	0.06	0.00	0.00	21.4	0.00				
10	0.00	0.03	0.15	0.30	0.53	1.32	3.38	9.78	30.1	22.5	6.24	2.35	0.92	0.41	0.22	0.08	0.00	0.00	78.3	34.0				
0	0.00	0.03	0.16	0.31	0.58	1.77	4.99	40.9	196	144	17.0	3.33	1.07	0.42	0.23	0.08	0.00	0.00	411	380				
-10	0.00	0.03	0.16	0.31	0.60	1.72	4.84	41.2	204	145	17.0	3.40	0.99	0.40	0.22	0.08	0.00	0.00	420	390				
-20	0.00	0.03	0.15	0.31	0.56	1.31	3.21	9.21	27.1	20.9	6.06	2.35	0.82	0.36	0.21	0.07	0.00	0.00	72.7	29.9				
-30	0.00	0.02	0.14	0.29	0.47	0.84	1.64	3.15	4.31	4.05	2.60	1.35	0.62	0.33	0.19	0.06	0.00	0.00	20.1	0.00				
-40	0.00	0.01	0.11	0.25	0.40	0.59	0.89	1.30	1.70	1.60	1.21	0.77	0.47	0.29	0.15	0.04	0.00	0.00	9.79	0.00				
-50	0.00	0.01	0.08	0.20	0.34	0.46	0.59	0.70	0.76	0.75	0.67	0.53	0.36	0.23	0.10	0.02	0.00	0.00	5.78	0.00				
-60	0.00	0.00	0.04	0.14	0.25	0.36	0.44	0.49	0.52	0.51	0.47	0.38	0.25	0.15	0.05	0.00	0.00	0.00	4.06	0.00				
-70	0.00	0.00	0.00	0.02	0.04	0.06	0.07	0.08	0.09	0.09	0.08	0.06	0.04	0.02	0.00	0.00	0.00	0.00	0.64	0.00				
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)	20	30	40	50	60	70	80	90							
φ t	0.00	0.20	1.36	3.02	5.31	11.0	24.0	113	473	347	56.5	17.6	7.34	3.71	1.93	0.55	0.02	0.00	1065	---				
φ a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	69.0	439	311	14.2	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	834				

one-half-peak spread: U:8.8,D:8.7 , L:8.4,R:9.0 NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG H(β) Interval: 1.0DEG Test Speed: HIGH Temperature:25.3DEG Operators:qcl Test Date:2013-12-16	V(B) Range:-60 - 60DEG V(B) Interval: 2.0DEG Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275 Humidity:65.0% Test Distance:8.100m [K=1.0000] Remarks:
-------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------

ISOCANDELA DIAGRAM

Test:U:120.0V I:0.6735A P:53.78W PF:0.6654 Lamp Flux:1065.01x1 lm		
NAME: LED Wall Washer 1B SRIES	TYPE:	WEIGHT:4.3kg
DIM.: L333xW147xH210mm	SPEC.:120V 30°	SERIAL No.:20131234
MFR.: TPK	SUR.:	PROTECTION ANGLE:

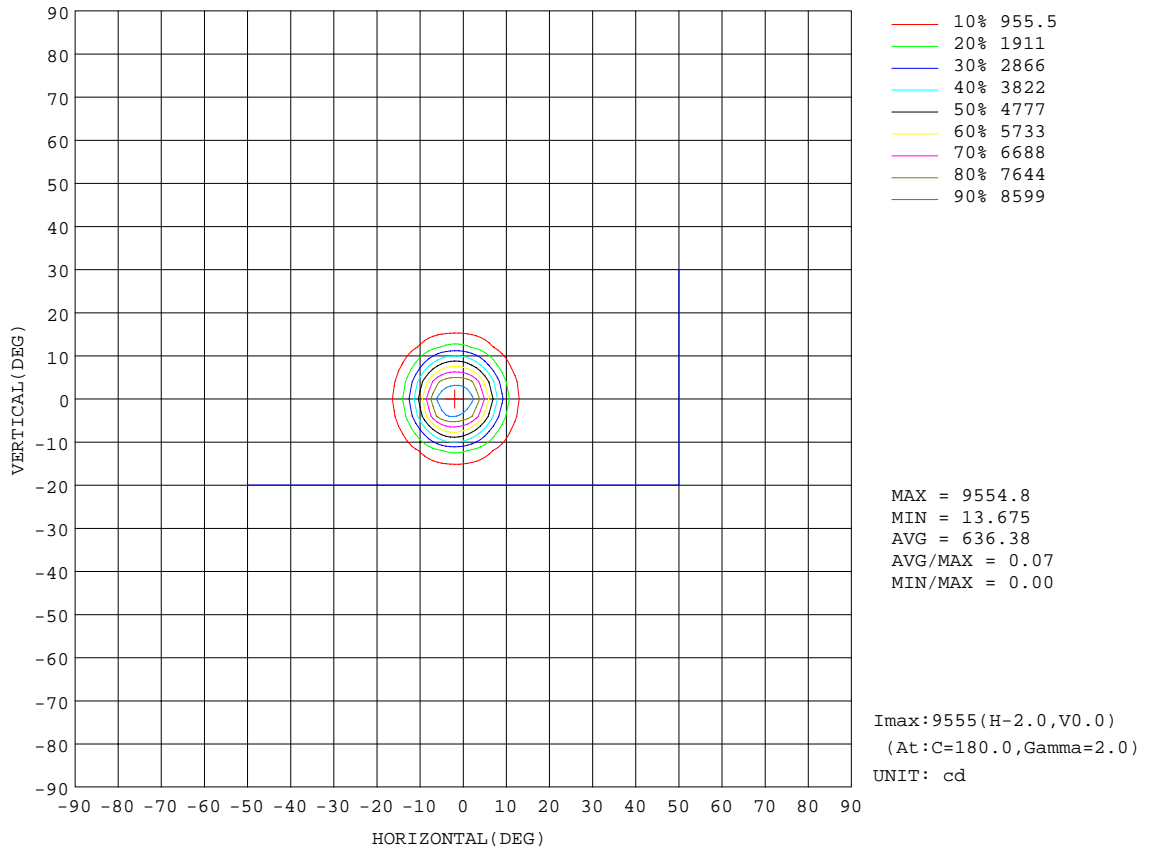


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:qcl
 Test Date:2013-12-16

V(B) Range:-60 - 60DEG
 V(B) Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:65.0%
 Test Distance:8.100m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.0V I:0.6735A P:53.78W PF:0.6654 Lamp Flux:1065.01lx1 lm		
NAME: LED Wall Washer 1B SRIES	TYPE:	WEIGHT:4.3kg
DIM.: L333xW147xH210mm	SPEC.:120V 30°	SERIAL No.:20131234
MFR.: TPK	SUR.:	PROTECTION ANGLE:

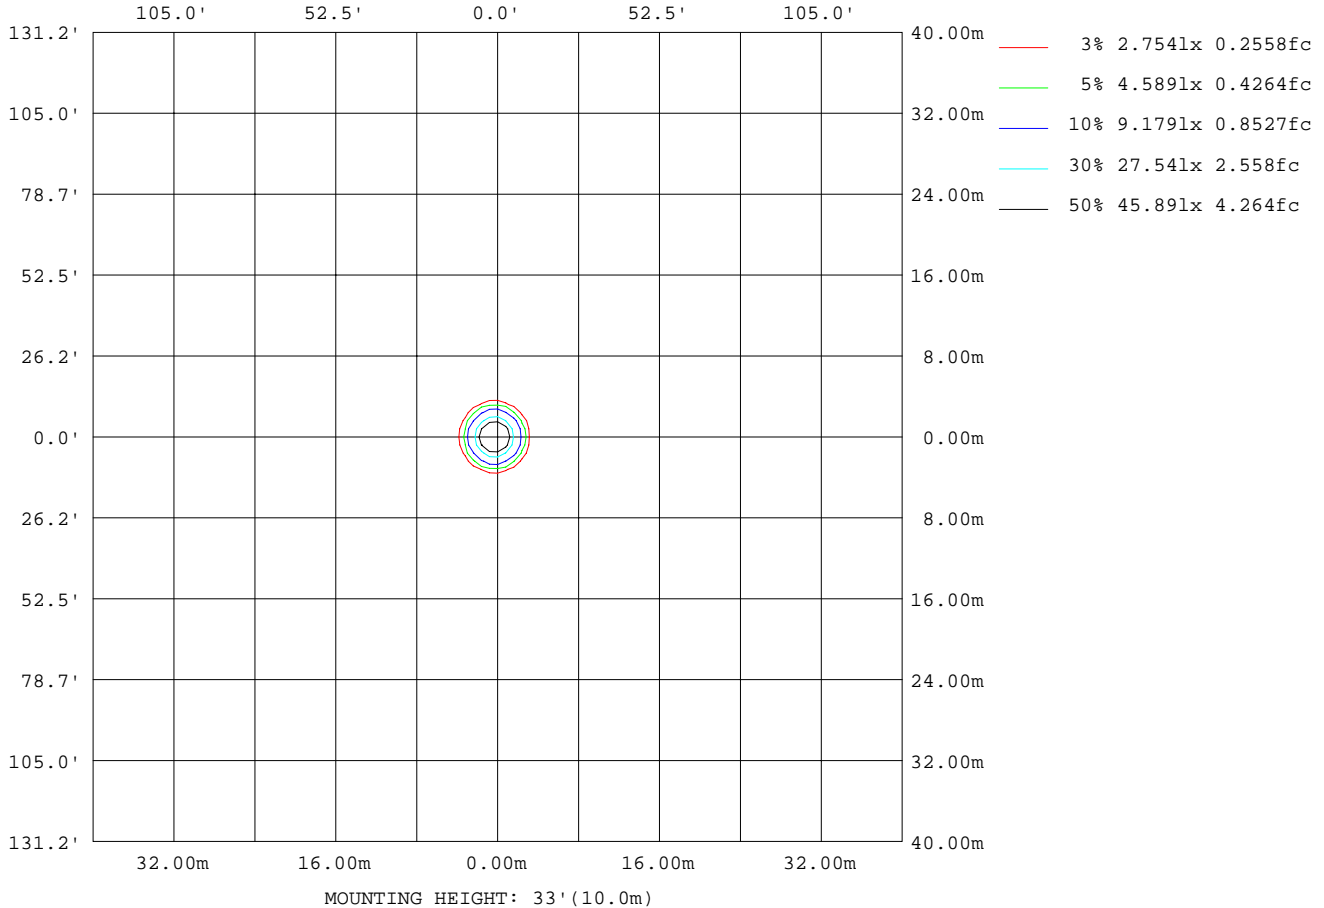


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:qc1
Test Date:2013-12-16

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.0V I:0.6735A P:53.78W PF:0.6654 Lamp Flux:1065.01x1 lm		
NAME: LED Wall Washer 1B SRIES	TYPE:	WEIGHT:4.3kg
DIM.: L333xW147xH210mm	SPEC.:120V 30°	SERIAL No.:20131234
MFR.: TPK	SUR.:	PROTECTION ANGLE:

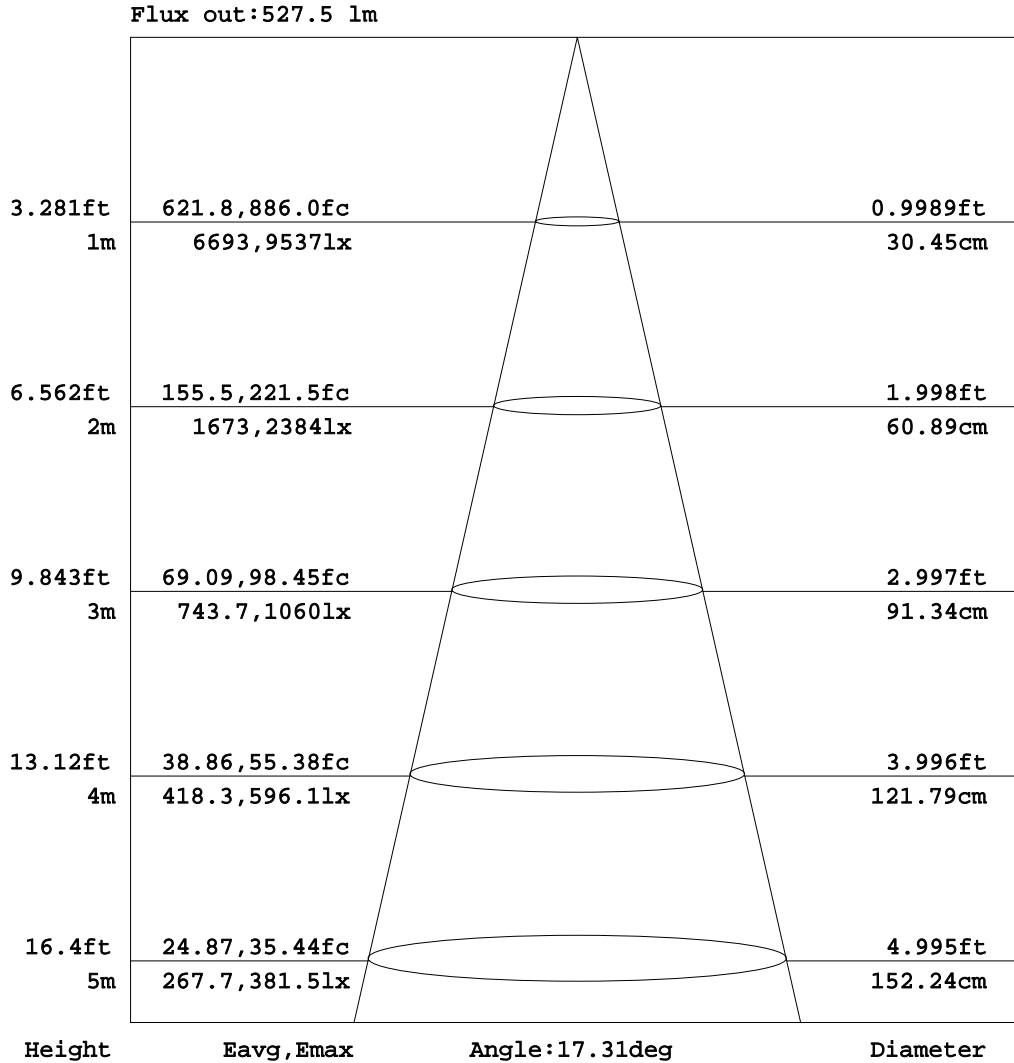


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:qcl
Test Date:2013-12-16

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks:

Planar Illuminance Curve

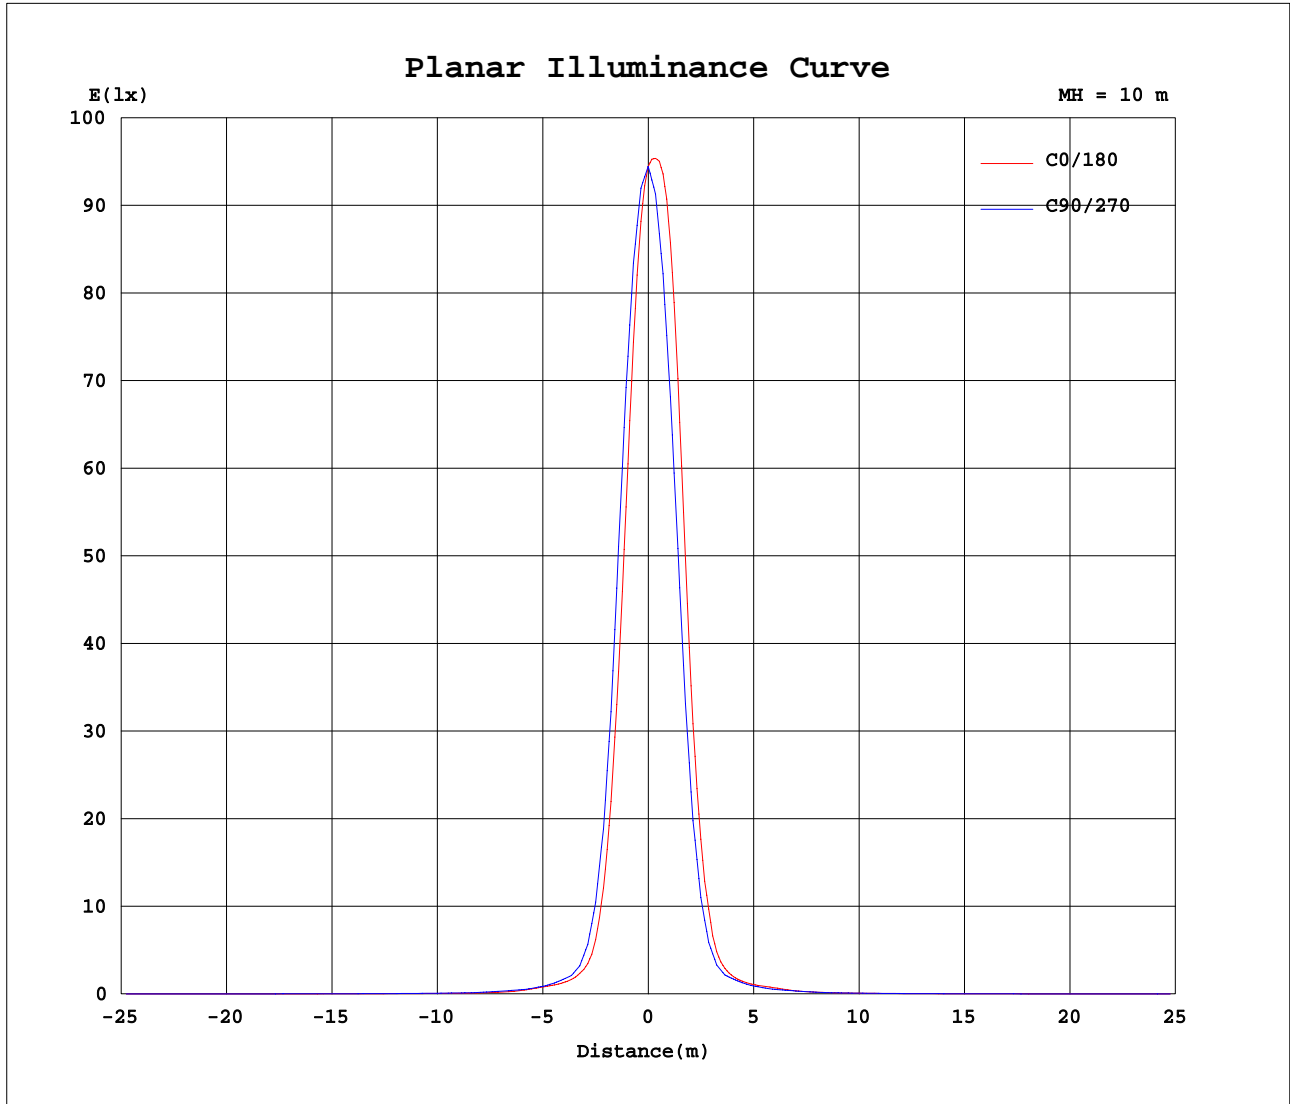

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:qcl
Test Date:2013-12-16

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.0V I:0.6735A P:53.78W PF:0.6654 Lamp Flux:1065.01x1 lm		
NAME: LED Wall Washer 1B SRIES	TYPE:	WEIGHT:4.3kg
DIM.: L333xW147xH210mm	SPEC.:120V 30°	SERIAL No.:20131234
MFR.: TPK	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.13	1.51	3.60	5.70	7.80	9.39	10.8	12.6	13.1	13.6	14.0	14.3	14.5	14.7	14.7
-55	0.00	0.00	0.00	0.03	0.70	2.68	5.06	7.43	9.57	11.2	12.6	14.2	15.0	15.5	15.9	16.2	16.6	16.7	16.6
-50	0.00	0.00	0.00	0.09	1.55	4.42	7.27	10.0	12.2	14.0	15.3	16.6	17.8	18.4	18.7	19.0	19.6	19.7	19.5
-45	0.00	0.00	0.00	0.35	2.34	5.61	8.64	11.3	13.5	15.3	16.6	18.0	19.6	20.9	22.0	23.2	24.3	24.6	24.5
-40	0.00	0.00	0.00	0.74	3.51	7.39	10.7	13.1	15.4	17.4	18.6	20.0	22.3	24.6	27.0	29.4	31.3	32.0	32.1
-35	0.00	0.00	0.01	1.04	4.30	8.24	11.6	14.1	16.4	18.1	20.4	23.0	26.7	31.0	36.0	41.8	48.6	52.8	52.8
-30	0.00	0.00	0.01	1.49	5.49	9.51	13.0	15.5	17.9	19.2	23.0	27.3	33.3	40.6	49.3	60.4	74.6	83.9	83.9
-25	0.00	0.00	0.00	2.01	6.21	10.4	13.7	16.3	18.7	21.0	25.2	31.8	40.6	52.3	72.8	98.9	118	129	130
-20	0.00	0.00	0.06	2.39	6.83	11.1	14.4	17.2	19.7	23.3	29.7	40.2	54.1	81.6	123	159	206	248	255
-15	0.00	0.00	0.07	2.64	7.26	11.6	14.8	17.6	20.2	24.9	33.2	50.4	68.0	110	156	240	412	605	638
-10	0.00	0.00	0.09	2.86	7.73	12.1	15.2	17.9	20.8	26.4	38.0	64.2	92.3	142	230	559	1545	3133	3372
-5	0.00	0.00	0.10	3.04	7.96	12.4	15.4	17.7	20.9	26.9	39.5	66.4	106	158	300	1001	3414	6855	7038
0	0.00	0.00	0.11	3.07	8.06	12.6	15.6	17.5	20.6	26.7	38.7	66.4	122	172	351	1428	5199	9177	9445
5	0.00	0.00	0.10	3.07	8.04	12.6	15.7	17.4	20.4	26.3	37.7	64.8	126	169	328	1232	4283	7886	8281
10	0.00	0.00	0.09	2.89	7.78	12.2	15.6	16.9	19.6	25.0	34.7	55.6	107	146	235	566	1640	3180	3465
15	0.00	0.00	0.06	2.77	7.50	11.9	15.6	16.7	19.2	24.1	32.6	50.0	83.6	127	183	322	665	1133	1207
20	0.00	0.00	0.05	2.41	6.86	11.2	14.8	16.5	18.6	23.1	30.1	46.6	66.2	86.8	129	167	216	258	261
25	0.00	0.00	0.01	2.20	6.50	10.7	14.2	16.2	18.6	22.0	29.0	39.5	56.6	68.1	93.6	126	151	168	169
30	0.00	0.00	0.01	1.47	5.49	9.48	13.0	15.6	17.9	20.8	26.6	30.9	38.1	46.1	56.9	68.0	80.7	89.8	90.4
35	0.00	0.00	0.01	1.18	4.69	8.64	12.1	14.7	17.0	19.6	24.0	27.4	33.0	38.5	46.1	53.9	62.2	67.7	68.2
40	0.00	0.00	0.00	0.75	3.49	7.37	10.7	13.4	15.7	17.9	20.2	22.2	25.4	27.3	30.0	32.7	34.4	34.4	34.8
45	0.00	0.00	0.00	0.49	2.70	6.20	9.43	12.2	14.4	16.4	18.5	20.3	22.7	24.0	25.9	27.7	28.9	28.9	29.2
50	0.00	0.00	0.00	0.10	1.52	4.44	7.46	10.4	12.4	14.2	16.1	17.6	18.8	19.0	19.7	20.1	20.6	20.5	20.8
55	0.00	0.00	0.00	0.06	0.99	3.29	5.99	8.63	10.7	12.4	14.1	15.5	16.6	17.0	17.6	18.0	18.4	18.4	18.6
60	0.00	0.00	0.00	0.00	0.18	1.56	3.77	5.99	8.04	9.65	11.1	12.4	13.3	14.0	14.5	14.9	15.2	15.4	15.2
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:qcl
Test Date:2013-12-16

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.0V I:0.6735A P:53.78W PF:0.6654 Lamp Flux:1065.01x1 lm		
NAME: LED Wall Washer 1B SRIES	TYPE:	WEIGHT:4.3kg
DIM.: L333xW147xH210mm	SPEC.:120V 30°	SERIAL No.:20131234
MFR.: TPK	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	14.6	14.5	14.1	12.9	11.1	8.97	7.84	6.35	4.74	2.94	1.29	0.14	0.00	0.00	0.00	0.00	0.00	0.00	
-55	16.4	16.2	15.9	14.9	13.3	11.3	9.63	8.11	6.49	4.56	2.46	0.96	0.14	0.00	0.00	0.00	0.00	0.00	
-50	19.0	18.7	18.6	18.0	16.5	14.8	12.3	10.7	9.11	7.00	4.22	2.19	0.34	0.00	0.00	0.00	0.00	0.00	
-45	24.2	23.3	22.2	20.9	18.6	16.3	13.8	12.0	10.4	8.19	5.56	3.07	0.89	0.04	0.00	0.00	0.00	0.00	
-40	31.9	30.3	27.7	25.4	21.8	18.6	15.9	13.9	12.3	9.98	7.56	4.38	1.72	0.09	0.00	0.00	0.00	0.00	
-35	50.0	44.9	38.8	32.9	26.6	21.8	18.1	15.3	13.3	11.0	8.46	5.31	2.48	0.41	0.00	0.00	0.00	0.00	
-30	77.3	66.7	55.4	44.2	33.8	26.6	21.4	17.3	14.9	12.5	9.82	6.70	3.62	0.89	0.00	0.00	0.00	0.00	
-25	121	104	78.0	57.6	47.0	31.6	23.8	18.3	15.2	13.2	10.6	7.49	4.13	1.15	0.00	0.00	0.00	0.00	
-20	221	171	131	91.7	62.0	43.5	27.1	20.0	15.7	13.7	11.8	8.61	4.79	1.56	0.00	0.00	0.00	0.00	
-15	472	279	172	120	76.4	51.8	29.7	21.2	16.2	13.9	12.5	9.02	5.10	1.72	0.00	0.00	0.00	0.00	
-10	2052	792	293	158	108	60.4	33.6	23.0	17.3	14.3	13.1	9.57	5.52	2.02	0.00	0.00	0.00	0.00	
-5	4408	1513	395	181	122	69.6	35.8	24.0	17.8	14.7	13.1	9.74	5.70	2.17	0.01	0.00	0.00	0.00	
0	6618	2302	504	201	127	74.6	37.9	25.2	18.6	15.3	13.3	9.98	5.90	2.34	0.00	0.00	0.00	0.00	
5	5578	1895	449	192	121	71.3	39.3	25.6	18.8	15.5	13.3	9.97	5.87	2.28	0.01	0.00	0.00	0.00	
10	2145	803	295	162	105	62.9	41.5	26.0	19.3	16.0	13.0	9.87	5.77	2.12	0.00	0.00	0.00	0.00	
15	799	392	207	137	86.4	54.8	36.7	24.6	19.1	15.9	12.8	9.65	5.56	1.92	0.00	0.00	0.00	0.00	
20	224	176	137	95.7	60.0	42.2	29.9	22.2	17.6	15.4	12.2	9.18	5.23	1.71	0.00	0.00	0.00	0.00	
25	154	130	99.3	68.4	47.6	35.5	26.1	20.3	17.0	14.7	11.5	8.43	4.77	1.40	0.00	0.00	0.00	0.00	
30	83.3	68.3	53.9	44.9	35.6	27.7	22.1	17.7	15.6	13.7	10.5	7.25	3.94	1.01	0.00	0.00	0.00	0.00	
35	63.7	54.1	43.9	37.6	30.7	24.5	20.1	16.8	14.6	12.5	9.38	6.30	3.14	0.66	0.00	0.00	0.00	0.00	
40	34.2	32.8	29.1	26.6	23.3	19.7	17.0	15.4	13.1	10.6	7.64	4.89	1.95	0.14	0.00	0.00	0.00	0.00	
45	29.0	27.9	25.5	23.7	21.0	18.0	15.3	13.7	11.7	9.35	6.44	3.98	1.40	0.08	0.00	0.00	0.00	0.00	
50	21.0	20.6	20.1	19.3	17.5	15.4	12.7	11.2	9.71	7.48	4.65	2.62	0.57	0.00	0.00	0.00	0.00	0.00	
55	18.6	18.2	17.7	16.9	15.1	13.0	10.9	9.45	7.89	5.81	3.37	1.67	0.34	0.00	0.00	0.00	0.00	0.00	
60	14.9	14.6	14.1	13.2	11.4	9.38	8.25	6.76	5.15	3.31	1.44	0.24	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:qcl
Test Date:2013-12-16

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_v1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks: