

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity		5593.4 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of I <sub>max</sub>	42.7V x 42.0H
	At 50% of I <sub>max</sub>	16.9V x 16.6H
	At 90% of I <sub>max</sub>	6.0V x 6.0H
Beam Flux	Total	1000.0 lumens per klm.
	To 10% of I <sub>max</sub>	682.4 lumens per klm.
	To 50% of I <sub>max</sub>	260.1 lumens per klm.
	To 90% of I <sub>max</sub>	40.7 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %


---

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:QC1  
Test Date:2015-01-14

V(B) Range:-60 - 60DEG  
V(B) Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:65.0%  
Test Distance:8.100m [K=1.0000]  
Remarks:

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.8416A P:20.20W PF:1.000 Lamp Flux:577.325x1 lm		
NAME: LED Pool Light	TYPE:	WEIGHT:
DIM.:	SPEC.:24V 20°	SERIAL No.:201501014
MFR.: TPK	SUR.:	PROTECTION ANGLE:

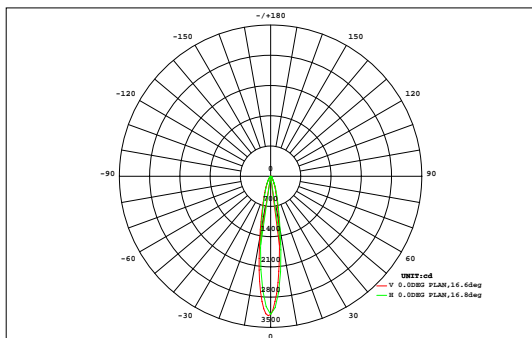

DATA OF LAMP		Eff:28.58lm/W	
MODEL	LPL-6B-18P-RGB	Imax(cd)	3229
NOMINAL POWER(W)	20	AVAILABILITY(%)	68.2
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	393.8
NOMINAL FLUX(lm)	577.325	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	577.3
TEST VOLTAGE(V)	24.0	θ @50%(H,V)	17,17DEG

VERTICAL( DEG )	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a		
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.03	0.08	0.16	0.25	0.36	0.46	0.52	0.52	0.45	0.34	0.23	0.14	0.06	0.02	0.00	0.00	3.62	0.00		
50	0.00	0.01	0.04	0.12	0.24	0.41	0.64	0.90	1.06	1.05	0.86	0.60	0.37	0.20	0.10	0.03	0.00	0.00	6.64	0.00		
40	0.00	0.01	0.06	0.17	0.35	0.69	1.28	2.07	2.65	2.58	1.92	1.16	0.61	0.30	0.14	0.05	0.01	0.00	14.1	0.00		
30	0.00	0.02	0.08	0.22	0.49	1.11	2.50	4.70	6.67	6.43	4.29	2.21	0.98	0.42	0.18	0.06	0.01	0.00	30.4	1.45		
20	0.00	0.02	0.09	0.25	0.63	1.67	4.47	10.6	19.1	17.8	9.18	3.90	1.44	0.55	0.22	0.07	0.01	0.00	70.0	47.8		
10	0.00	0.02	0.10	0.28	0.72	2.11	6.37	20.2	60.0	51.3	16.0	5.36	1.78	0.62	0.24	0.08	0.01	0.00	165	148		
0	0.00	0.02	0.09	0.27	0.71	2.09	6.35	20.3	60.4	51.7	16.0	5.30	1.76	0.62	0.24	0.08	0.01	0.00	166	149		
-10	0.00	0.02	0.09	0.24	0.62	1.65	4.43	10.5	18.7	17.4	9.02	3.75	1.39	0.54	0.22	0.07	0.01	0.00	68.6	46.6		
-20	0.00	0.01	0.07	0.20	0.47	1.08	2.47	4.61	6.51	6.25	4.17	2.12	0.94	0.42	0.18	0.06	0.01	0.00	29.6	0.81		
-30	0.00	0.01	0.06	0.16	0.33	0.65	1.24	2.01	2.57	2.49	1.85	1.10	0.59	0.30	0.14	0.05	0.01	0.00	13.6	0.00		
-40	0.00	0.01	0.04	0.11	0.22	0.38	0.61	0.85	0.99	0.97	0.79	0.55	0.35	0.20	0.10	0.03	0.00	0.00	6.19	0.00		
-50	0.00	0.00	0.02	0.07	0.13	0.22	0.32	0.41	0.46	0.45	0.38	0.29	0.20	0.12	0.06	0.02	0.00	0.00	3.14	0.00		
-60	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.39	0.00		
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL( DEG )	20	30	40	50	60	70	80	90					
Φ t	0.00	0.15	0.78	2.18	5.09	12.3	31.1	77.6	180	159	65.0	26.7	10.7	4.43	1.87	0.62	0.10	0.00	577	---		
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	2.40	54.1	159	138	39.8	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	394		


one-half-peak spread: U:8.4,D:8.6 , L:8.3,R:8.4 NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:QC1  
Test Date:2015-01-14

V(B) Range:-60 - 60DEG  
V(B) Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:65.0%  
Test Distance:8.100m [K=1.0000]  
Remarks:

# ISOCANDELA DIAGRAM

Test:U:24.00V I:0.8416A P:20.20W PF:1.000 Lamp Flux:577.325x1 lm		
NAME: LED Pool Light	TYPE:	WEIGHT:
DIM.:	SPEC.:24V 20°	SERIAL No.:201501014
MFR.: TPK	SUR.:	PROTECTION ANGLE:

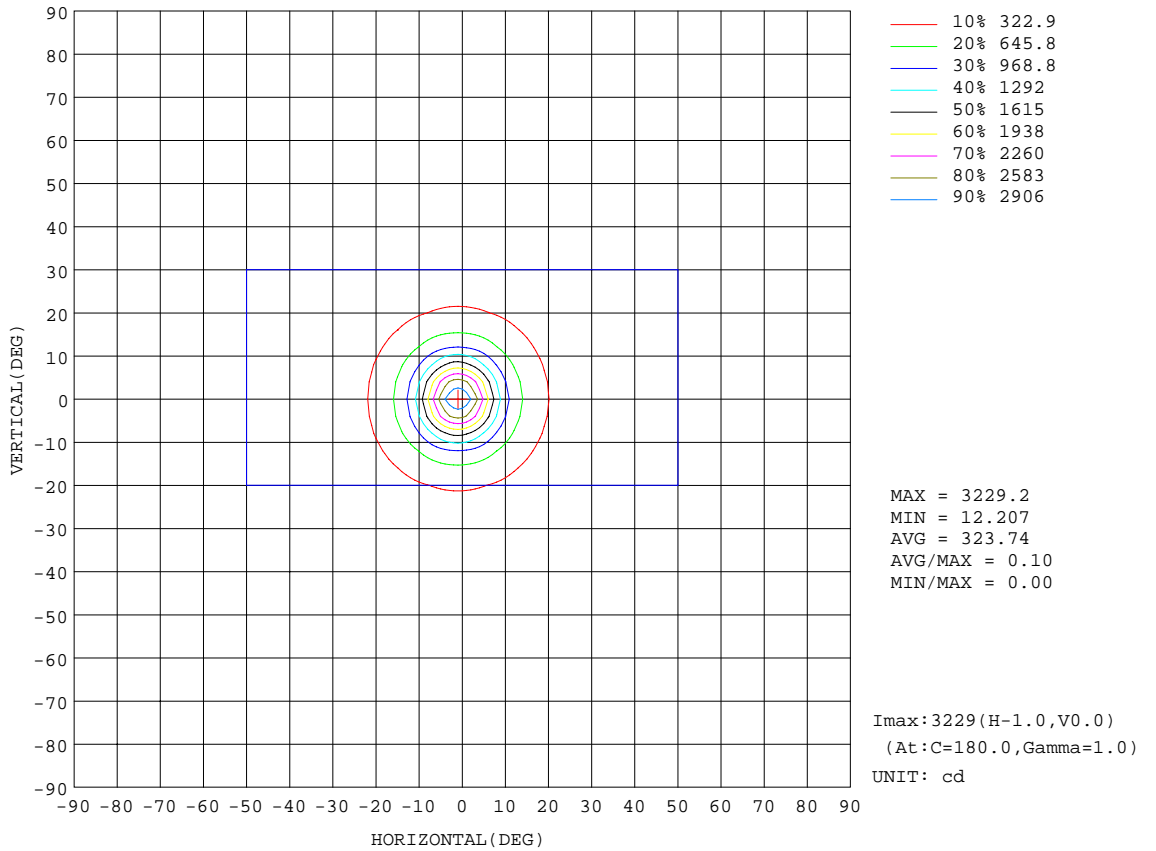


H( $\beta$ ) Range: -90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: QC1  
 Test Date: 2015-01-14

V(B) Range: -60 - 60DEG  
 V(B) Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
 Humidity: 65.0%  
 Test Distance: 8.100m [K=1.0000]  
 Remarks:

# ISOLUX DIAGRAM

Test:U:24.00V I:0.8416A P:20.20W PF:1.000 Lamp Flux:577.325x1 lm		
NAME: LED Pool Light	TYPE:	WEIGHT:
DIM.:	SPEC.:24V 20°	SERIAL No.:201501014
MFR.: TPK	SUR.:	PROTECTION ANGLE:

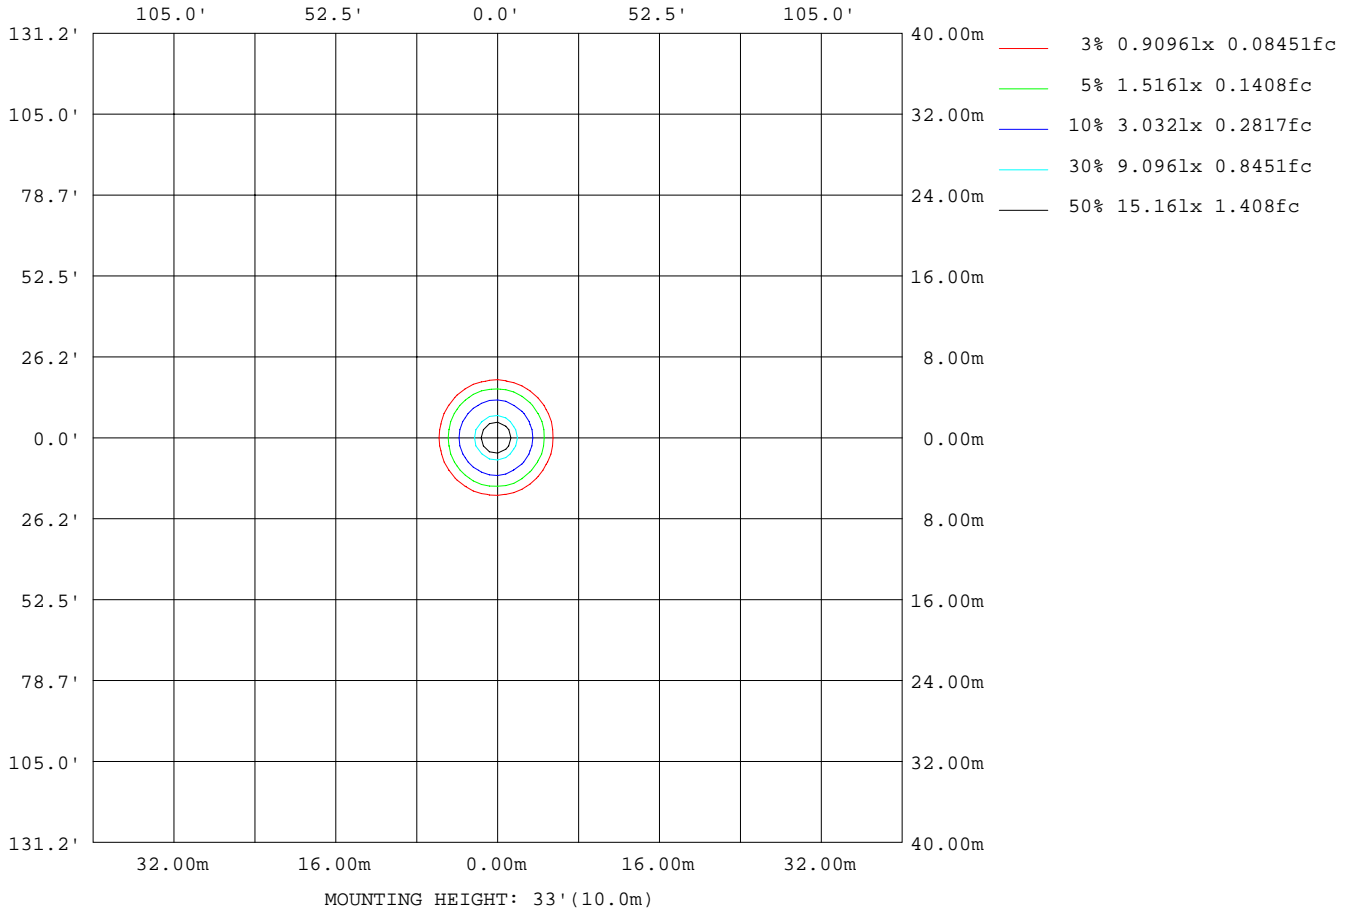


**H( $\beta$ ) Range:** -90 - 90DEG  
**H( $\beta$ ) Interval:** 1.0DEG  
**Test Speed:** HIGH  
**Temperature:** 25.3DEG  
**Operators:** QC1  
**Test Date:** 2015-01-14

**V(B) Range:** -60 - 60DEG  
**V(B) Interval:** 2.0DEG  
**Test System:** EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
**Humidity:** 65.0%  
**Test Distance:** 8.100m [K=1.0000]  
**Remarks:**

## AAI Figure

Test:U:24.00V I:0.8416A P:20.20W PF:1.000 Lamp Flux:577.325x1 lm		
NAME: LED Pool Light	TYPE:	WEIGHT:
DIM.:	SPEC.:24V 20°	SERIAL No.:201501014
MFR.: TPK	SUR.:	PROTECTION ANGLE:

Flux out:154.4 lm

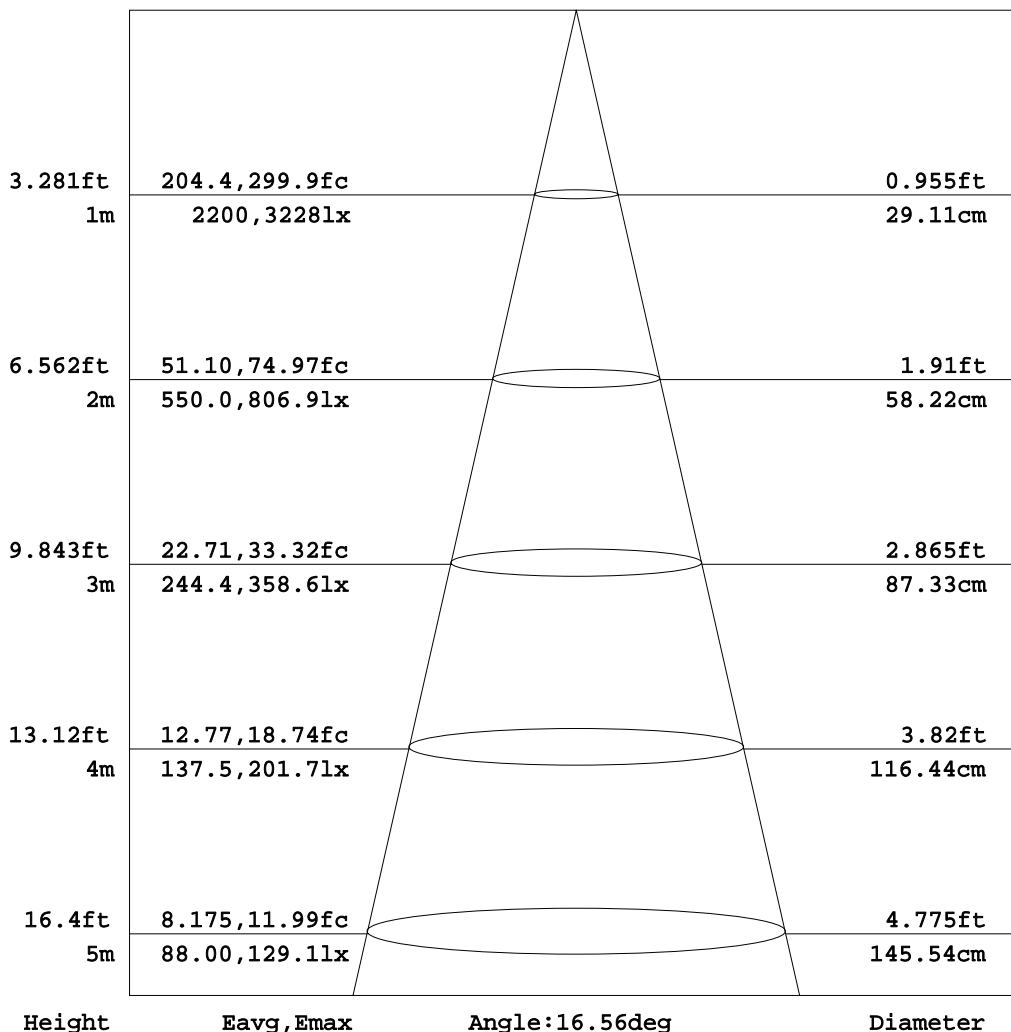


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:QC1  
Test Date:2015-01-14

V(B) Range:-60 - 60DEG  
V(B) Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:65.0%  
Test Distance:8.100m [K=1.0000]  
Remarks:

# Planar Illuminance Curve

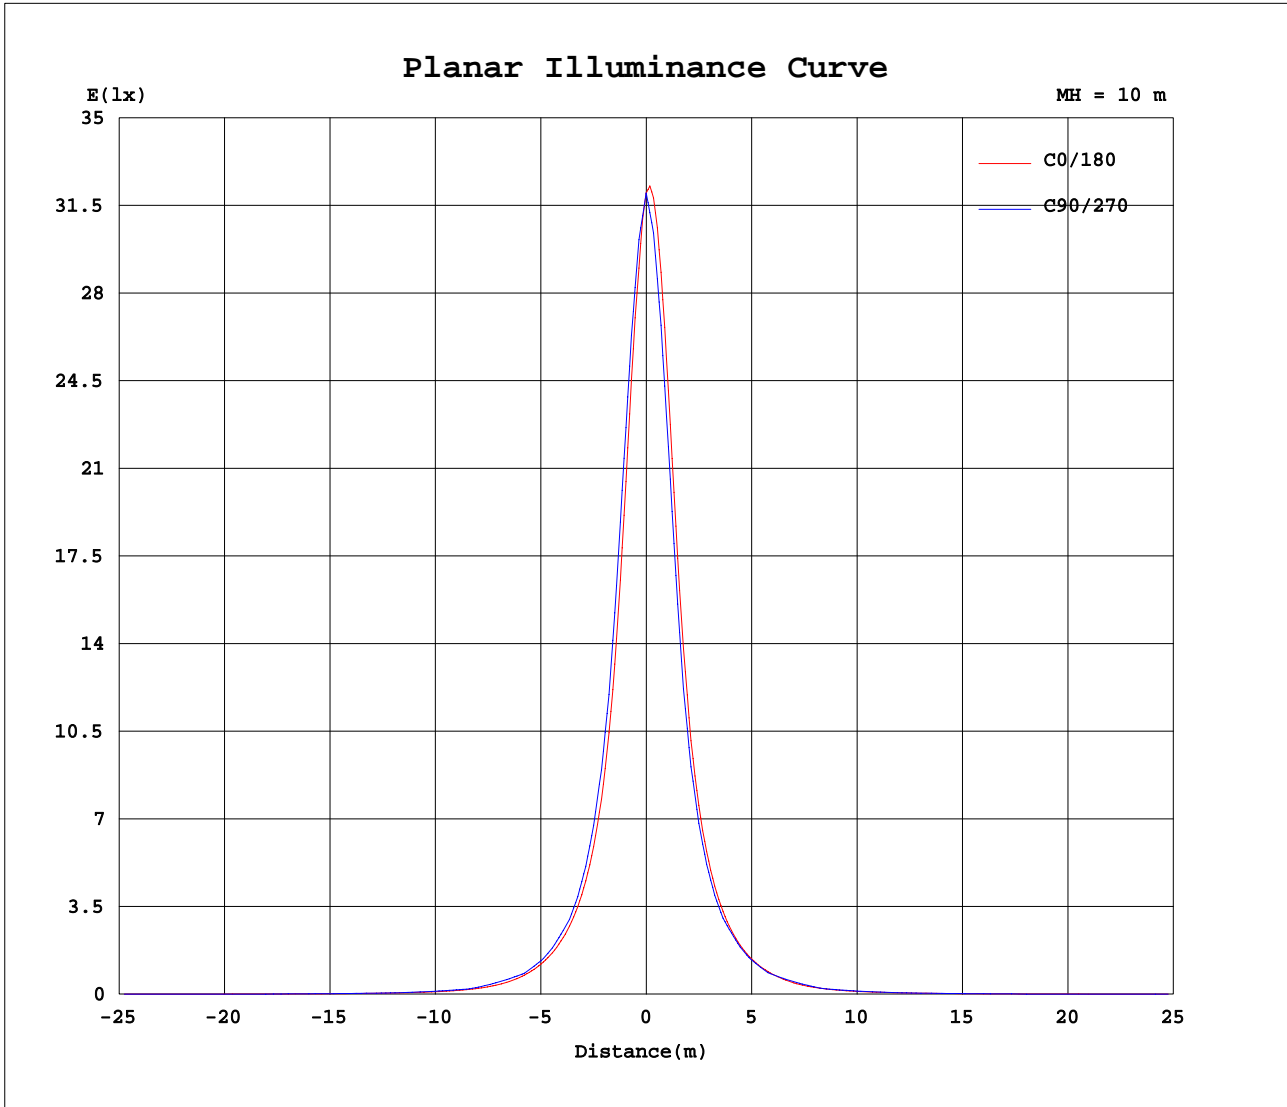

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:QC1  
Test Date:2015-01-14

V(B) Range:-60 - 60DEG  
V(B) Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:65.0%  
Test Distance:8.100m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.8416A P:20.20W PF:1.000 Lamp Flux:577.325x1 lm		
NAME: LED Pool Light	TYPE:	WEIGHT:
DIM.:	SPEC.:24V 20°	SERIAL No.:201501014
MFR.: TPK	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H( DEG ) V( DEG )	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.12	0.73	1.36	1.93	2.71	3.64	4.59	5.44	6.24	7.05	7.89	8.87	9.54	9.93	10.1	10.1
-55	0.00	0.00	0.00	0.30	1.03	1.75	2.57	3.66	4.76	5.88	7.02	8.20	9.45	10.9	12.3	13.3	14.1	14.4	14.4
-50	0.00	0.00	0.00	0.58	1.49	2.33	3.53	5.07	6.45	7.82	9.39	11.1	13.1	15.3	17.4	19.0	20.3	20.9	20.9
-45	0.00	0.00	0.05	0.81	1.77	2.81	4.35	6.06	7.72	9.60	11.8	14.4	17.5	21.1	24.5	27.6	30.0	31.3	31.5
-40	0.00	0.00	0.13	1.16	2.18	3.54	5.60	7.54	9.63	12.3	15.4	19.2	24.1	29.7	35.3	40.4	44.5	47.0	47.4
-35	0.00	0.00	0.20	1.32	2.44	4.06	6.32	8.49	11.1	14.5	18.8	24.5	32.4	42.1	52.9	63.8	73.2	79.1	80.4
-30	0.00	0.00	0.31	1.56	2.82	4.83	7.40	9.92	13.3	17.8	23.8	32.4	44.8	60.7	79.4	98.9	116	127	130
-25	0.00	0.00	0.36	1.70	3.11	5.42	8.07	11.0	15.0	20.6	28.3	40.1	57.9	82.1	111	142	172	192	196
-20	0.00	0.00	0.47	1.89	3.45	6.02	8.86	12.3	17.4	24.5	35.0	52.1	80.0	119	169	230	296	347	360
-15	0.00	0.00	0.54	2.01	3.66	6.40	9.42	13.3	19.0	27.1	39.6	61.0	97.0	148	221	320	440	545	576
-10	0.00	0.00	0.61	2.14	3.89	6.78	10.1	14.5	20.8	30.1	45.3	72.7	120	192	308	496	786	1131	1254
-5	0.00	0.00	0.65	2.20	4.02	7.00	10.4	15.1	21.7	31.6	48.2	78.8	132	216	362	625	1122	1886	2176
0	0.00	0.00	0.67	2.23	4.07	7.11	10.7	15.4	22.1	32.4	49.8	82.3	140	231	399	725	1446	2694	3200
5	0.00	0.00	0.66	2.22	4.09	7.17	10.8	15.4	22.1	32.3	49.4	81.3	137	225	383	677	1281	2288	2692
10	0.00	0.00	0.61	2.13	3.97	7.01	10.5	14.8	21.1	30.6	45.9	73.5	121	193	309	498	789	1140	1276
15	0.00	0.00	0.56	2.05	3.88	6.89	10.2	14.3	20.2	28.9	42.4	66.2	107	165	252	377	541	699	748
20	0.00	0.00	0.49	1.88	3.61	6.45	9.52	13.1	18.2	25.4	36.0	53.1	81.1	120	171	233	300	352	367
25	0.00	0.00	0.42	1.75	3.42	6.14	9.06	12.3	16.8	23.0	31.7	45.2	65.9	94.7	131	171	211	240	248
30	0.00	0.00	0.34	1.53	2.93	5.31	8.13	10.8	14.3	19.0	25.2	33.7	46.0	61.9	80.7	101	118	129	132
35	0.00	0.00	0.27	1.37	2.64	4.74	7.38	9.82	12.8	16.8	21.8	28.5	37.7	49.5	63.1	77.3	89.4	97.2	99.4
40	0.00	0.00	0.16	1.12	2.20	3.88	6.27	8.37	10.6	13.4	16.7	20.6	25.3	30.8	36.7	42.1	46.5	49.2	49.9
45	0.00	0.00	0.10	0.93	1.91	3.29	5.33	7.29	9.21	11.5	14.1	17.1	20.7	24.9	29.2	33.2	36.4	38.4	38.8
50	0.00	0.00	0.00	0.64	1.47	2.40	3.93	5.67	7.09	8.56	10.2	12.0	13.9	15.9	17.9	19.7	21.2	22.1	22.2
55	0.00	0.00	0.00	0.46	1.21	1.99	3.17	4.64	5.95	7.22	8.55	9.95	11.4	12.9	14.4	15.8	16.9	17.6	17.7
60	0.00	0.00	0.00	0.19	0.81	1.36	2.02	3.11	4.24	5.22	6.04	6.89	7.65	8.46	9.31	9.94	10.4	10.8	11.0
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:QC1  
Test Date:2015-01-14

V(B) Range:-60 - 60DEG  
V(B) Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:65.0%  
Test Distance:8.100m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.8416A P:20.20W PF:1.000 Lamp Flux:577.325x1 lm		
NAME: LED Pool Light	TYPE:	WEIGHT:
DIM.:	SPEC.:24V 20°	SERIAL No.:201501014
MFR.: TPK	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	9.79	9.30	8.95	8.15	7.28	6.45	5.68	4.80	3.98	3.03	2.03	1.28	0.80	0.24	0.00	0.00	0.00	0.00	
-55	14.0	13.3	12.4	11.2	9.94	8.68	7.47	6.27	5.19	4.08	2.94	1.88	1.10	0.48	0.06	0.00	0.00	0.00	
-50	20.4	19.3	17.6	15.8	13.9	12.0	10.2	8.48	6.99	5.64	4.30	2.80	1.55	0.85	0.16	0.00	0.00	0.00	
-45	30.6	28.5	25.6	22.3	19.0	16.0	13.1	10.7	8.63	6.83	5.24	3.55	1.99	1.08	0.32	0.00	0.00	0.00	
-40	45.8	42.4	37.6	32.1	26.6	21.8	17.5	14.0	11.1	8.62	6.64	4.69	2.66	1.42	0.57	0.00	0.00	0.00	
-35	76.8	69.0	58.7	47.4	37.2	28.8	22.1	17.0	13.1	10.0	7.61	5.47	3.19	1.65	0.70	0.00	0.00	0.00	
-30	123	109	90.2	70.4	53.1	39.3	29.1	21.6	16.2	12.1	9.06	6.64	3.99	2.01	0.90	0.00	0.00	0.00	
-25	184	159	128	96.6	69.7	49.1	34.8	25.0	18.3	13.4	9.83	7.17	4.43	2.24	1.02	0.06	0.00	0.00	
-20	330	270	205	148	101	67.5	44.9	30.7	21.6	15.5	11.1	7.98	5.13	2.62	1.18	0.13	0.00	0.00	
-15	507	390	278	189	126	81.0	51.8	34.3	23.6	16.6	11.8	8.39	5.42	2.81	1.26	0.17	0.00	0.00	
-10	999	659	414	261	163	101	61.9	39.3	26.3	18.2	12.7	8.93	5.80	3.04	1.39	0.19	0.00	0.00	
-5	1578	882	501	298	182	110	66.4	41.4	27.4	18.8	13.1	9.11	5.91	3.11	1.44	0.21	0.00	0.00	
0	2207	1094	573	328	196	118	70.3	43.3	28.2	19.6	13.4	9.23	6.00	3.18	1.49	0.21	0.00	0.00	
5	1879	982	537	314	191	115	69.0	42.6	27.9	19.1	13.2	9.11	5.93	3.14	1.50	0.22	0.00	0.00	
10	1012	665	418	266	168	104	63.7	40.2	26.6	18.4	12.8	8.86	5.79	3.06	1.47	0.19	0.00	0.00	
15	642	472	326	220	144	91.3	57.4	37.0	25.0	17.4	12.1	8.52	5.55	2.93	1.43	0.19	0.00	0.00	
20	336	277	213	155	107	71.1	47.1	31.7	22.1	15.7	11.1	7.95	5.13	2.71	1.32	0.13	0.00	0.00	
25	231	196	156	117	83.2	57.7	39.8	27.6	19.7	14.2	10.2	7.41	4.69	2.51	1.23	0.10	0.00	0.00	
30	126	111	92.1	72.7	55.5	41.4	30.3	22.1	16.4	12.2	9.08	6.65	4.07	2.21	1.05	0.00	0.00	0.00	
35	94.8	84.3	71.1	57.3	44.7	34.1	25.5	19.0	14.4	10.9	8.21	5.93	3.60	1.99	0.89	0.00	0.00	0.00	
40	48.2	44.5	39.6	34.1	28.5	23.2	18.3	14.4	11.4	8.85	6.91	4.85	2.89	1.67	0.65	0.00	0.00	0.00	
45	37.7	35.0	31.5	27.4	23.3	19.1	15.3	12.3	9.84	7.71	5.98	4.12	2.48	1.44	0.48	0.00	0.00	0.00	
50	21.8	20.8	19.3	17.5	15.4	13.0	10.9	9.05	7.52	5.99	4.59	3.03	1.87	1.09	0.21	0.00	0.00	0.00	
55	17.5	16.7	15.6	14.1	12.4	10.6	8.97	7.54	6.25	4.92	3.70	2.46	1.55	0.79	0.13	0.00	0.00	0.00	
60	10.9	10.5	9.96	9.17	8.06	7.07	6.14	5.28	4.35	3.31	2.37	1.61	1.06	0.33	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:QC1  
Test Date:2015-01-14

V(B) Range:-60 - 60DEG  
V(B) Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:65.0%  
Test Distance:8.100m [K=1.0000]  
Remarks: