

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1762.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax At 50% of Imax At 90% of Imax	76.4V x 74.3H 39.8V x 39.6H 15.1V x 15.0H
Beam Flux	Total To 10% of Imax To 50% of Imax To 90% of Imax	999.6 lumens per klm. 871.1 lumens per klm. 471.1 lumens per klm. 89.0 lumens per klm.
	Upward LOR Downward LOR	0.0 % 100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC1
Test Date:2015-03-31

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.10m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:1.702A P:40.86W PF:1.000 Lamp Flux:1080.33x1 lm		
NAME: LED Pool Light	TYPE:24V	WEIGHT:
DIM.:	SPEC.:30°	SERIAL No.:201503114
MFR.: TPK	SUR.:	PROTECTION ANGLE:

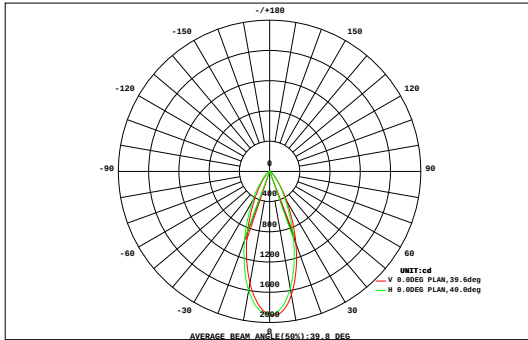

DATA OF LAMP		Eff:26.44lm/W	
MODEL	LPL-6B-36P-RGB	Imax(cd)	1904
NOMINAL POWER(W)	42	AVAILABILITY(%)	87.2
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	942.2
NOMINAL FLUX(lm)	1080.33	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1080
TEST VOLTAGE(V)	24.0	θ @50%(H,V)	40,40DEG


VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT: lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.01	0.04	0.12	0.23	0.40	0.61	0.83	0.97	0.98	0.84	0.63	0.42	0.25	0.13	0.05	0.01	0.00	6.51	0.00
40	0.00	0.01	0.07	0.19	0.39	0.76	1.36	2.07	2.58	2.59	2.09	1.39	0.79	0.41	0.19	0.07	0.01	0.00	15.0	0.00
30	0.00	0.02	0.10	0.26	0.63	1.46	3.03	5.26	7.21	7.37	5.59	3.30	1.61	0.70	0.29	0.10	0.02	0.00	37.0	18.8
20	0.00	0.03	0.13	0.36	1.01	2.70	6.39	12.4	17.8	18.0	12.9	6.79	2.87	1.08	0.39	0.13	0.03	0.00	83.0	72.0
10	0.00	0.03	0.14	0.45	1.39	4.19	11.3	23.8	35.4	36.4	26.0	12.9	4.85	1.61	0.52	0.16	0.03	0.00	159	150
0	0.00	0.04	0.16	0.53	1.77	5.70	16.3	34.2	50.7	51.9	36.0	17.5	6.19	1.92	0.58	0.17	0.04	0.00	224	216
-10	0.00	0.03	0.16	0.52	1.74	5.62	16.1	34.1	50.7	52.6	37.3	18.4	6.57	2.04	0.61	0.18	0.04	0.00	227	219
-20	0.00	0.03	0.16	0.49	1.55	4.66	12.5	25.6	37.0	37.6	26.7	13.2	4.95	1.65	0.52	0.16	0.03	0.00	167	158
-30	0.00	0.03	0.13	0.39	1.10	2.95	7.02	13.6	19.6	20.1	14.6	7.77	3.29	1.24	0.44	0.15	0.03	0.00	92.5	81.8
-40	0.00	0.02	0.11	0.30	0.75	1.77	3.65	6.30	8.49	8.55	6.41	3.73	1.82	0.79	0.32	0.11	0.02	0.00	43.2	25.9
-50	0.00	0.02	0.08	0.21	0.45	0.90	1.62	2.48	3.11	3.13	2.54	1.70	0.97	0.50	0.23	0.09	0.02	0.00	18.0	0.00
-60	0.00	0.01	0.05	0.14	0.27	0.47	0.73	1.01	1.19	1.19	1.02	0.76	0.50	0.29	0.15	0.06	0.01	0.00	7.83	0.00
-70	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.10	0.12	0.12	0.11	0.09	0.07	0.04	0.02	0.01	0.00	0.00	0.88	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	0.01	0.28	1.33	3.98	11.3	31.7	80.7	162	235	241	172	88.2	34.9	12.5	4.38	1.44	0.30	0.01	1080	---
Φ a	0.00	0.00	0.00	0.00	0.00	13.1	67.7	151	225	231	162	75.7	17.3	0.00	0.00	0.00	0.00	0.00	---	942

one-half-peak spread: U:20.6,D:19.6 , L:20.7,R:19.1 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG	V(B) Range:-60 - 60DEG
H(β) Interval: 1.0DEG	V(B) Interval: 2.0DEG
Test Speed: HIGH	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Temperature:25.3DEG	Humidity:65.0%
Operators:QC1	Test Distance:8.100m [K=1.0000]
Test Date:2015-03-31	Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:1.702A P:40.86W PF:1.000 Lamp Flux:1080.33x1 lm		
NAME: LED Pool Light	TYPE:24V	WEIGHT:
DIM.:	SPEC.:30°	SERIAL No.:201503114
MFR.: TPK	SUR.:	PROTECTION ANGLE:

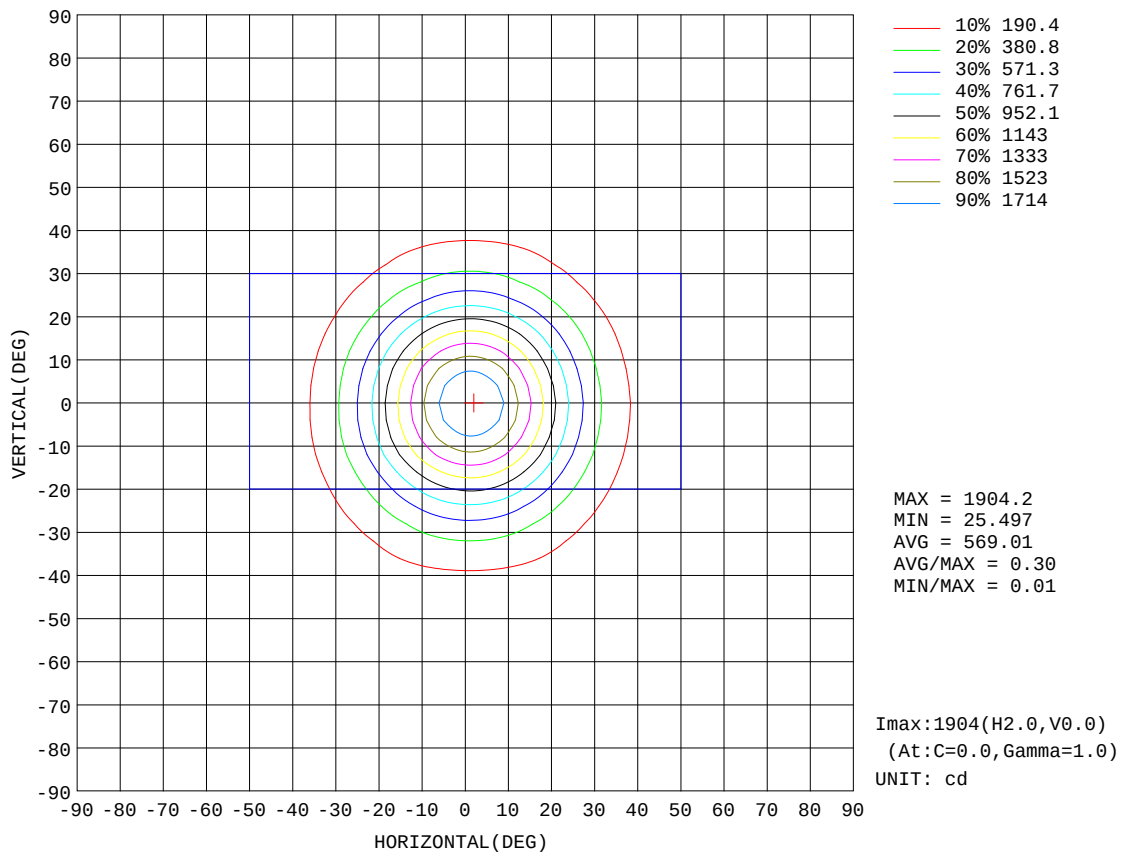


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC1
Test Date:2015-03-31

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:1.702A P:40.86W PF:1.000 Lamp Flux:1080.33x1 lm		
NAME: LED Pool Light	TYPE:24V	WEIGHT:
DIM.:	SPEC.:30°	SERIAL No.:201503114
MFR.: TPK	SUR.:	PROTECTION ANGLE:

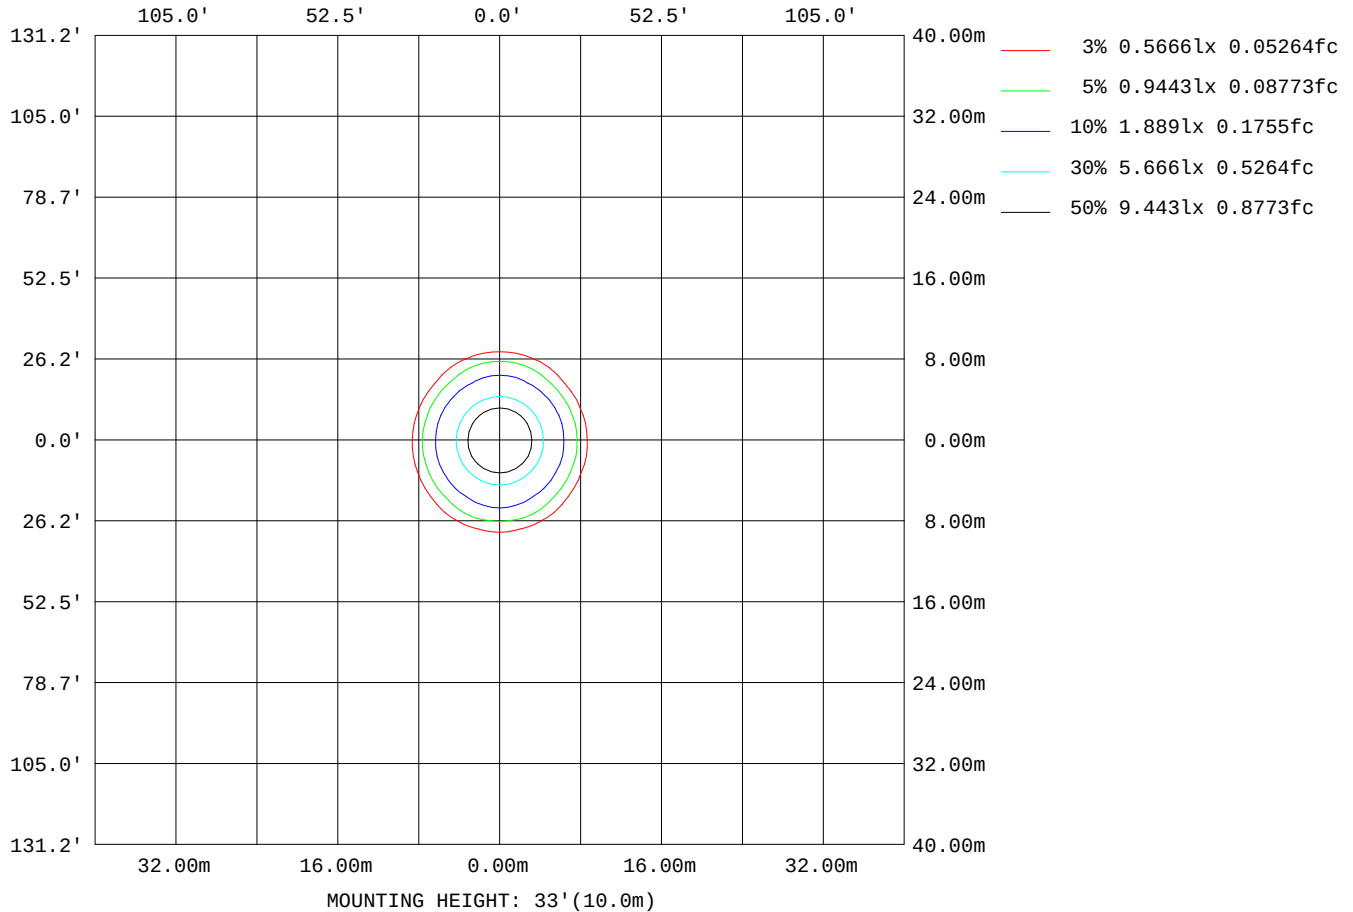


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC1
Test Date:2015-03-31

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:1.702A P:40.86W PF:1.000 Lamp Flux:1080.33x1 lm		
NAME: LED Pool Light	TYPE:24V	WEIGHT:
DIM.:	SPEC.:30°	SERIAL No.:201503114
MFR.: TPK	SUR.:	PROTECTION ANGLE:

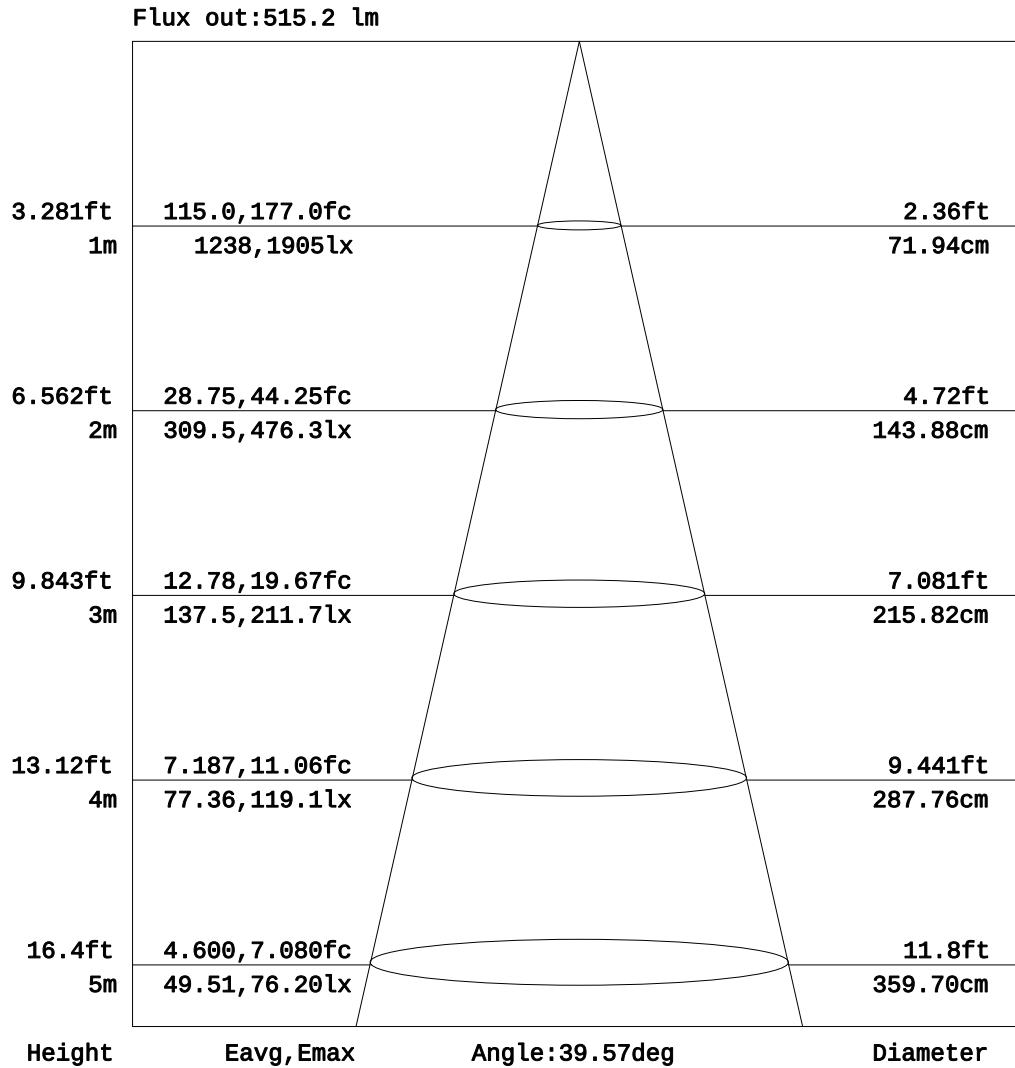


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:QC1
 Test Date:2015-03-31

V(B) Range:-60 - 60DEG
 V(B) Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:65.0%
 Test Distance:8.100m [K=1.0000]
 Remarks:

Planar Illuminance Curve

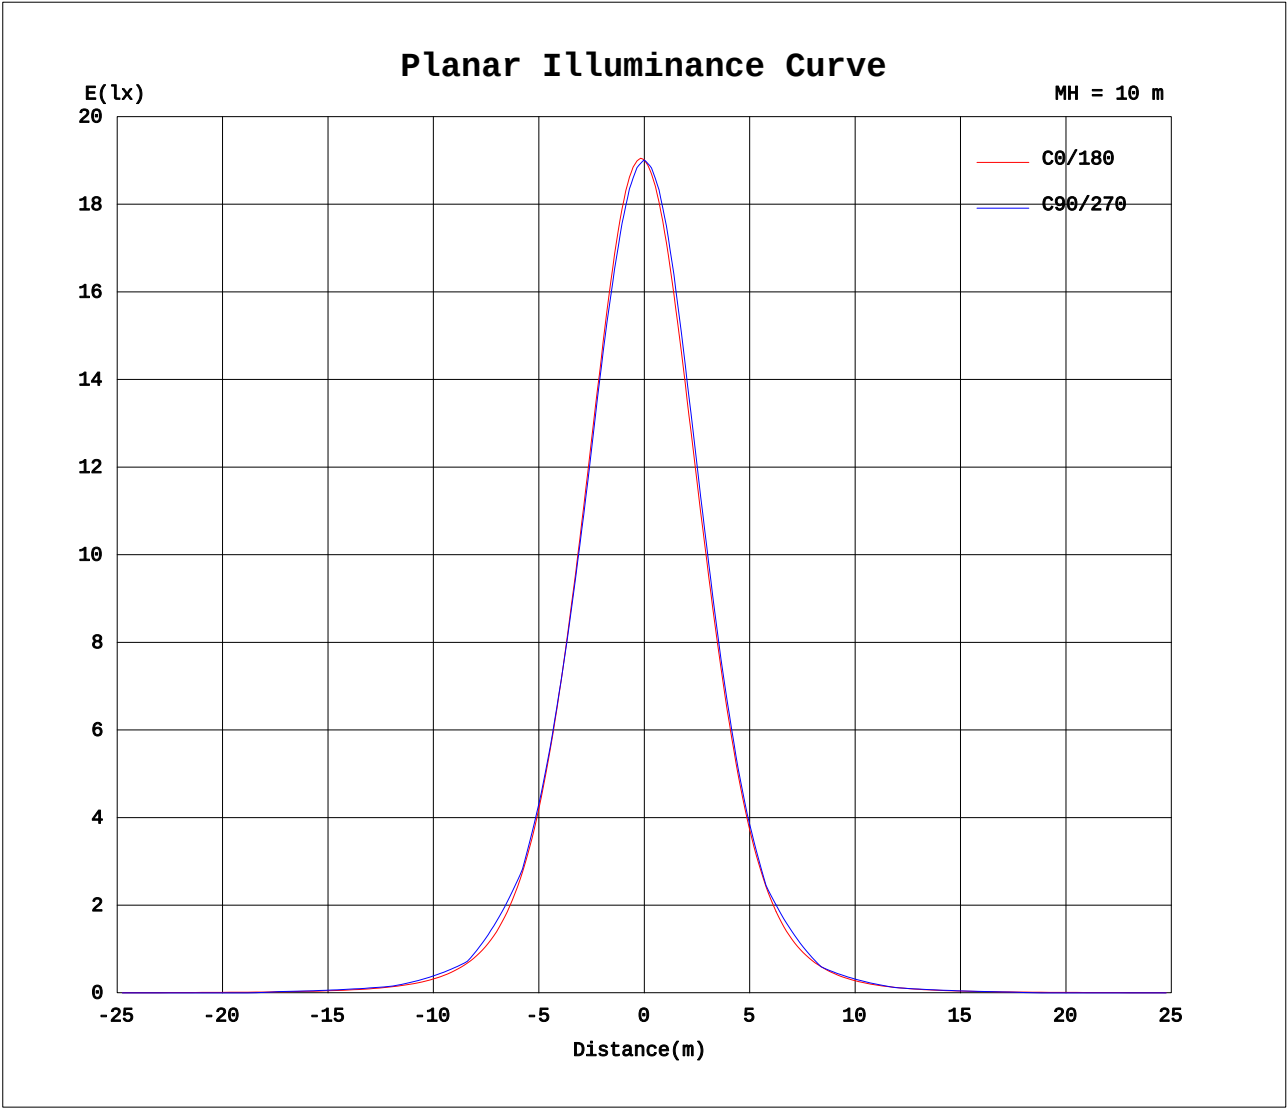

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC1
Test Date:2015-03-31

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:1.702A P:40.86W PF:1.000 Lamp Flux:1080.33x1 lm																		
NAME: LED Pool Light									TYPE:24V					WEIGHT:				
DIM.:									SPEC.:30°					SERIAL No.:201503114				
MFR.: TPK									SUR.:					PROTECTION ANGLE:				

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.45	1.48	2.78	4.17	5.69	7.29	9.02	10.8	12.7	14.8	16.8	18.9	20.5	22.0	23.1	23.5
-55	0.00	0.00	0.06	0.77	2.02	3.54	5.24	7.14	9.17	11.4	14.1	17.2	20.8	24.5	28.4	31.9	34.9	37.0	37.8
-50	0.00	0.00	0.32	1.52	3.18	5.09	7.33	9.83	12.6	15.8	20.1	25.1	31.0	37.4	44.0	50.1	55.1	58.3	59.2
-45	0.00	0.00	0.46	1.89	3.76	5.99	8.62	11.7	15.3	20.2	26.7	35.0	45.2	56.6	68.8	80.8	90.8	97.5	99.7
-40	0.00	0.00	0.42	2.03	4.17	6.77	9.84	13.6	18.3	25.1	34.4	46.9	62.9	81.5	102	123	141	154	160
-35	0.00	0.00	0.55	2.32	4.64	7.54	11.0	15.4	21.6	30.7	43.9	62.6	87.3	118	154	193	230	257	270
-30	0.00	0.00	1.07	3.23	5.97	9.43	13.8	19.6	28.7	42.4	63.0	92.8	133	183	244	312	375	419	436
-25	0.00	0.00	1.21	3.55	6.53	10.3	15.1	22.0	33.0	50.2	76.8	116	171	245	339	442	537	605	631
-20	0.00	0.00	0.99	3.31	6.37	10.4	15.5	23.1	35.7	56.0	88.5	139	215	326	469	636	796	917	975
-15	0.00	0.00	1.06	3.48	6.67	10.8	16.4	24.7	39.0	62.4	101	162	257	399	585	798	1001	1155	1228
-10	0.00	0.05	1.52	4.18	7.66	12.3	18.6	29.0	47.1	77.6	129	212	349	548	805	1083	1337	1528	1605
-5	0.00	0.05	1.57	4.27	7.81	12.5	19.1	30.0	49.1	81.8	137	229	381	601	885	1191	1476	1695	1788
0	0.00	0.00	1.14	3.64	6.97	11.4	17.5	27.4	44.9	74.8	126	212	356	573	862	1185	1500	1761	1896
5	0.00	0.00	1.13	3.63	6.95	11.3	17.3	27.2	44.2	73.4	123	206	345	554	833	1145	1454	1705	1841
10	0.00	0.05	1.47	4.07	7.45	11.9	18.0	28.1	45.3	74.2	123	202	331	522	771	1045	1306	1497	1577
15	0.00	0.03	1.39	3.93	7.20	11.4	17.2	26.5	42.0	67.8	110	179	287	446	654	886	1102	1261	1324
20	0.00	0.00	0.88	3.06	5.92	9.59	14.3	21.4	32.8	51.1	80.5	127	195	296	431	587	742	860	916
25	0.00	0.00	0.76	2.83	5.56	9.03	13.3	19.5	29.3	44.4	68.2	105	157	231	327	438	546	631	671
30	0.00	0.00	0.88	2.86	5.38	8.58	12.4	17.6	25.5	37.0	54.2	79.3	113	157	210	267	322	363	378
35	0.00	0.00	0.73	2.51	4.85	7.76	11.3	15.8	22.2	31.4	44.8	64.1	89.9	122	161	202	241	269	280
40	0.00	0.00	0.29	1.63	3.64	5.99	8.86	12.4	16.4	21.6	29.0	38.9	51.8	67.2	84.3	101	116	127	133
45	0.00	0.00	0.21	1.34	3.06	5.14	7.65	10.6	13.9	18.2	23.8	31.2	40.7	51.9	64.1	76.2	86.7	94.5	98.0
50	0.00	0.00	0.19	1.10	2.53	4.23	6.25	8.49	10.8	13.5	16.6	20.5	25.0	29.8	34.7	39.2	42.9	45.4	46.3
55	0.00	0.00	0.11	0.81	1.95	3.39	5.06	6.93	8.88	11.1	13.5	16.4	19.7	23.2	26.6	29.7	32.3	34.0	34.6
60	0.00	0.00	0.00	0.24	0.92	1.90	3.03	4.31	5.68	7.09	8.54	9.97	11.4	12.9	14.3	15.4	16.3	16.9	17.2
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC1
Test Date:2015-03-31

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:1.702A P:40.86W PF:1.000 Lamp Flux:1080.33x1 lm																			
NAME: LED Pool Light										TYPE:24V					WEIGHT:				
DIM.:										SPEC.:30°					SERIAL No.:201503114				
MFR.: TPK										SUR.:					PROTECTION ANGLE:				

Table--2

UNIT: cd

H(°)\V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	23.5	22.8	21.5	20.0	18.2	16.4	14.2	12.2	10.3	8.35	6.58	4.89	3.33	1.89	0.72	0.04	0.00	0.00	
-55	37.4	35.8	33.2	30.1	26.5	22.9	19.3	16.0	13.2	10.6	8.23	6.11	4.21	2.50	1.09	0.15	0.00	0.00	
-50	57.9	54.6	49.6	43.9	37.6	31.5	25.9	20.8	16.6	13.3	10.1	7.43	5.09	3.04	1.32	0.14	0.00	0.00	
-45	97.0	90.0	79.7	67.9	55.9	44.8	35.1	27.2	20.8	15.9	12.0	8.66	5.93	3.60	1.67	0.28	0.00	0.00	
-40	157	146	129	108	87.2	68.0	51.8	38.8	28.8	21.2	15.7	11.3	7.81	4.96	2.60	0.74	0.00	0.00	
-35	265	242	208	168	130	97.2	70.6	50.5	35.8	25.3	18.1	12.8	8.81	5.57	2.96	0.91	0.00	0.00	
-30	421	376	313	245	182	131	91.8	62.9	42.8	29.3	20.2	14.0	9.45	5.82	2.99	0.79	0.00	0.00	
-25	605	537	440	338	243	169	114	75.8	50.0	33.2	22.3	15.3	10.2	6.22	3.21	0.91	0.00	0.00	
-20	955	860	711	542	383	257	166	107	67.8	43.0	27.8	18.5	12.2	7.72	4.18	1.53	0.08	0.00	
-15	1203	1081	894	678	472	310	195	122	75.9	47.2	29.9	19.5	12.8	8.03	4.34	1.62	0.03	0.00	
-10	1547	1362	1105	821	559	357	217	132	79.5	48.3	29.9	19.2	12.3	7.54	3.90	1.25	0.00	0.00	
-5	1719	1508	1217	901	612	386	232	139	83.4	50.1	30.7	19.6	12.5	7.61	3.95	1.27	0.00	0.00	
0	1864	1659	1352	1019	702	447	269	160	95.0	56.7	34.3	21.6	13.8	8.55	4.69	1.77	0.04	0.00	
5	1798	1597	1300	979	674	429	260	154	92.0	55.2	33.6	21.2	13.5	8.40	4.61	1.73	0.04	0.00	
10	1515	1331	1071	792	537	342	208	126	76.2	46.5	28.9	18.5	11.9	7.31	3.81	1.20	0.00	0.00	
15	1271	1120	903	667	456	294	182	112	68.9	42.8	27.0	17.5	11.4	6.96	3.62	1.12	0.00	0.00	
20	895	804	663	504	357	238	155	98.6	62.6	39.9	25.8	17.0	11.3	7.13	3.87	1.37	0.00	0.00	
25	655	589	489	376	270	186	124	81.5	53.2	34.9	23.1	15.6	10.4	6.56	3.55	1.23	0.01	0.00	
30	364	326	271	213	160	115	80.2	55.2	37.7	25.9	17.9	12.4	8.42	5.17	2.58	0.66	0.00	0.00	
35	270	243	204	163	124	90.8	64.7	45.5	31.9	22.5	15.9	11.1	7.55	4.64	2.27	0.55	0.00	0.00	
40	130	121	107	90.6	73.4	57.5	43.8	32.9	24.6	18.4	13.6	9.81	6.79	4.29	2.16	0.60	0.00	0.00	
45	96.3	90.0	80.3	68.5	56.3	44.9	34.9	26.8	20.5	15.6	11.7	8.48	5.86	3.65	1.78	0.44	0.00	0.00	
50	45.3	42.8	39.0	34.4	29.8	25.1	20.8	16.9	13.7	11.0	8.33	6.05	4.10	2.38	0.98	0.08	0.00	0.00	
55	34.0	32.3	29.7	26.5	23.2	19.9	16.7	13.8	11.3	9.01	6.85	4.97	3.31	1.86	0.72	0.05	0.00	0.00	
60	17.1	16.6	15.8	14.8	13.6	12.2	10.8	9.40	7.97	6.36	4.92	3.59	2.36	1.27	0.47	0.02	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC1
Test Date:2015-03-31

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks: