Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity		3036.1 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	56.9V x 56.1H
	At 50% of Imax	28.5V x 28.0H
	At 90% of Imax	10.7V x 10.4H
Beam Flux	Total	999.8 lumens per klm.
	To 10% of Imax	816.8 lumens per klm.
	To 50% of Imax	412.0 lumens per klm.
	To 90% of Imax	75.8 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG	V(B) Range:-60 - 60DEG
H(β) Interval: 1.0DEG	V(B) Interval: 2.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Temperature:25.3DEG	Humidity:65.0%
Operators:QC1	Test Distance:8.100m [K=1.0000]
Test Date:2015-04-02	Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:1.694A P:40.65W PF:1.000 Lamp Flux:1098.45x1 lm		
NAME: LED Pool Light	TYPE:36P	WEIGHT:
DIM.: D210XH188	SPEC.:24V 40°	SERIAL No.:201504006
MFR.: TPK	SUR.:	PROTECTION ANGLE:

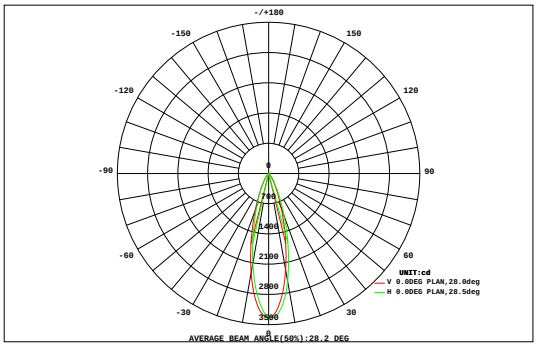

DATA OF LAMP		Eff:27.02lm/W	
MODEL	LPL-6B-RGB	Imax(cd)	3335
NOMINAL POWER(W)	42	AVAILABILITY(%)	81.6
RATED VOLTAGE(V)	24	Avai. FLUX(lm)	896.7
NOMINAL FLUX(lm)	1098.45	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1098
TEST VOLTAGE(V)	24.0	θ @50%(H,V)	28,28DEG

AREA FLUX DIAGRAM — UNIT:lm

VERTICAL(DEG)	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG) 20	30	40	50	60	70	80	90	Φ t	Φ a
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.01	0.05	0.13	0.26	0.43	0.61	0.77	0.87	0.87	0.76	0.59	0.41	0.25	0.12	0.04	0.01	0.00	6.19	0.00
50	0.00	0.01	0.07	0.19	0.39	0.68	1.08	1.55	1.88	1.87	1.52	1.05	0.66	0.37	0.18	0.07	0.01	0.00	11.6	0.00
40	0.00	0.02	0.10	0.27	0.58	1.15	2.24	4.03	5.68	5.60	3.92	2.17	1.10	0.55	0.25	0.09	0.02	0.00	27.8	0.00
30	0.00	0.03	0.13	0.35	0.81	1.92	4.83	11.0	17.6	17.2	10.4	4.54	1.79	0.75	0.32	0.12	0.02	0.00	71.7	46.2
20	0.00	0.03	0.15	0.41	1.06	3.04	9.76	27.2	48.9	47.6	25.5	8.96	2.77	0.97	0.38	0.14	0.03	0.00	177	160
10	0.00	0.03	0.16	0.45	1.22	3.91	14.3	44.3	85.1	83.2	41.8	13.2	3.57	1.11	0.41	0.15	0.03	0.00	293	278
0	0.00	0.03	0.16	0.44	1.19	3.76	13.4	40.9	78.1	76.9	39.2	12.6	3.48	1.09	0.41	0.15	0.03	0.00	272	257
-10	0.00	0.03	0.14	0.40	1.00	2.76	8.35	22.1	38.6	38.1	21.3	7.89	2.57	0.92	0.37	0.14	0.03	0.00	145	127
-20	0.00	0.03	0.12	0.33	0.75	1.72	4.06	8.53	13.1	12.9	8.25	3.85	1.61	0.70	0.31	0.12	0.03	0.00	56.4	27.3
-30	0.00	0.02	0.10	0.26	0.54	1.04	1.93	3.25	4.36	4.32	3.16	1.85	0.98	0.50	0.24	0.09	0.02	0.00	22.7	0.00
-40	0.00	0.01	0.07	0.19	0.36	0.61	0.95	1.31	1.54	1.53	1.27	0.91	0.58	0.34	0.17	0.07	0.01	0.00	9.93	0.00
-50	0.00	0.01	0.05	0.12	0.23	0.36	0.51	0.63	0.70	0.69	0.61	0.48	0.34	0.21	0.11	0.04	0.01	0.00	5.09	0.00
-60	0.00	0.00	0.01	0.02	0.03	0.05	0.07	0.08	0.08	0.08	0.07	0.06	0.04	0.03	0.01	0.01	0.00	0.00	0.64	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Φ t	0.01	0.27	1.29	3.56	8.43	21.4	62.1	166	297	291	158	58.1	19.9	7.80	3.31	1.22	0.25	0.01	1098	---
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	34.5	146	277	271	138	30.0	0.00	0.00	0.00	0.00	0.00	0.00	---	897

one-half-peak spread: U:13.0,D:15.7 , L:14.3,R:13.9 **NEMA Beam Type: Type 4**

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC1
Test Date:2015-04-02

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks:

D:\我的桌面\ST-141202IES\原件\LPL-6B-36P-RGB-40°.GOS

ISOCANDELA DIAGRAM

Test:U:24.00V I:1.694A P:40.65W PF:1.000 Lamp Flux:1098.45x1 lm		
NAME: LED Pool Light	TYPE:36P	WEIGHT:
DIM.: D210XH188	SPEC.:24V 40°	SERIAL No.:201504006
MFR.: TPK	SUR.:	PROTECTION ANGLE:

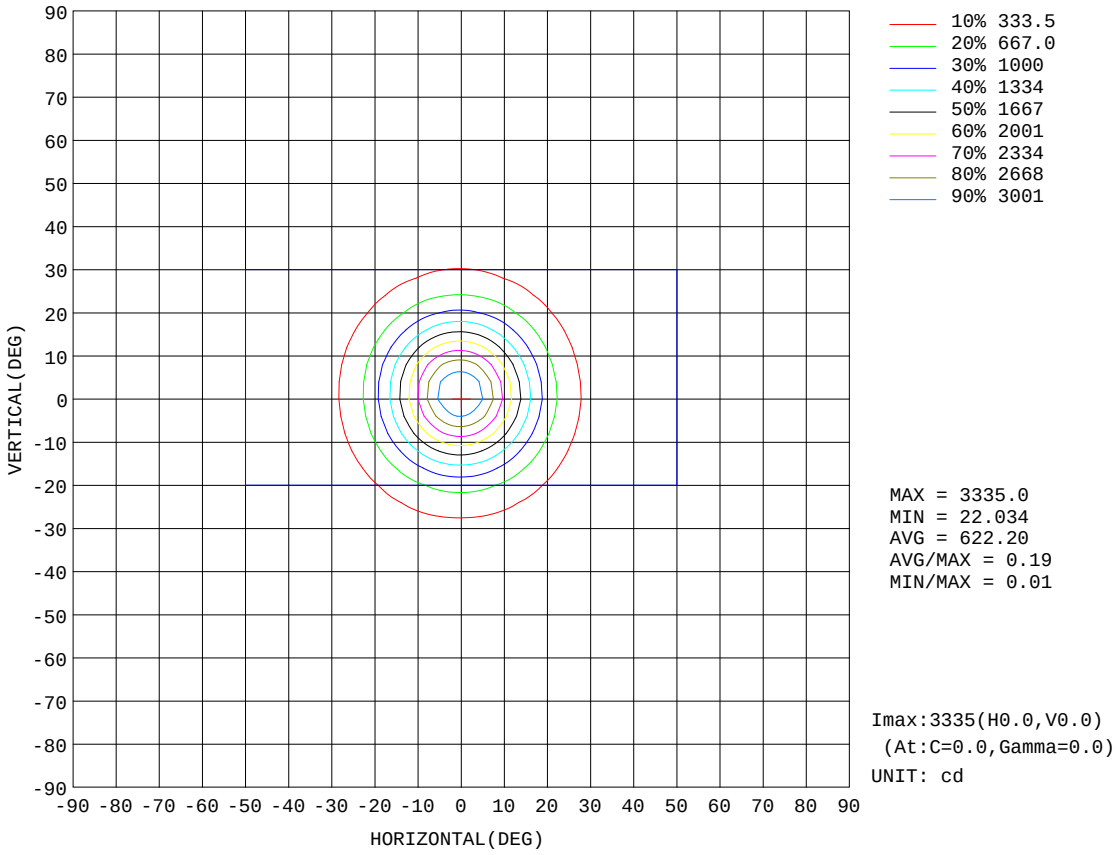

MAX = 3335.0
MIN = 22.034
AVG = 622.20
AVG/MAX = 0.19
MIN/MAX = 0.01

Imax:3335(H0.0,V0.0)
(At:C=0.0,Gamma=0.0)
UNIT: cd

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC1
Test Date:2015-04-02

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:1.694A P:40.65W PF:1.000 Lamp Flux:1098.45x1 lm		
NAME: LED Pool Light	TYPE:36P	WEIGHT:
DIM.: D210XH188	SPEC.:24V 40°	SERIAL No.:201504006
MFR.: TPK	SUR.:	PROTECTION ANGLE:

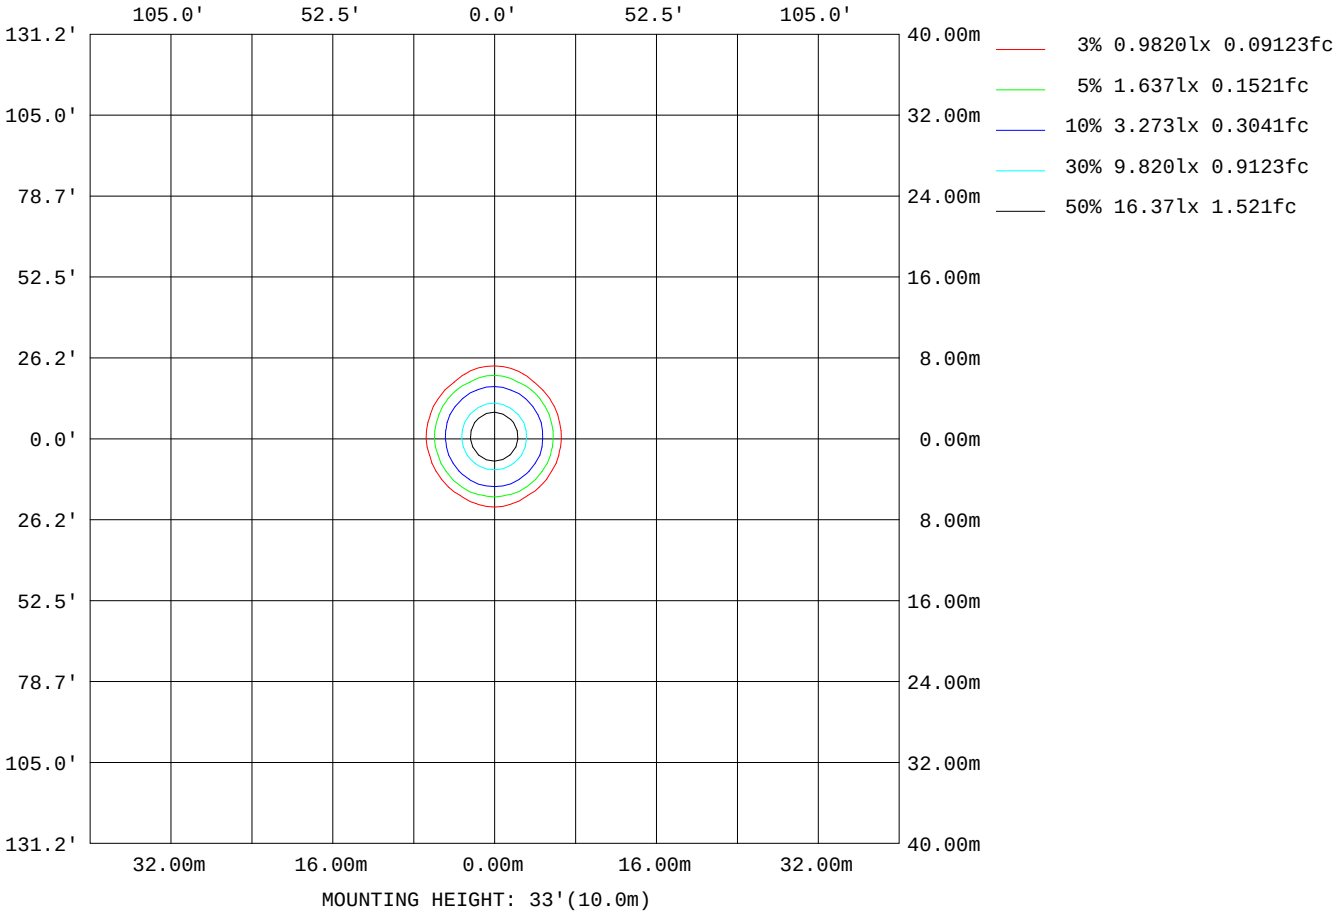

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC1
Test Date:2015-04-02

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:1.694A P:40.65W PF:1.000 Lamp Flux:1098.45x1 lm		
NAME: LED Pool Light	TYPE:36P	WEIGHT:
DIM.: D210XH188	SPEC.:24V 40°	SERIAL No.:201504006
MFR.: TPK	SUR.:	PROTECTION ANGLE:

Flux out:467.4 lm

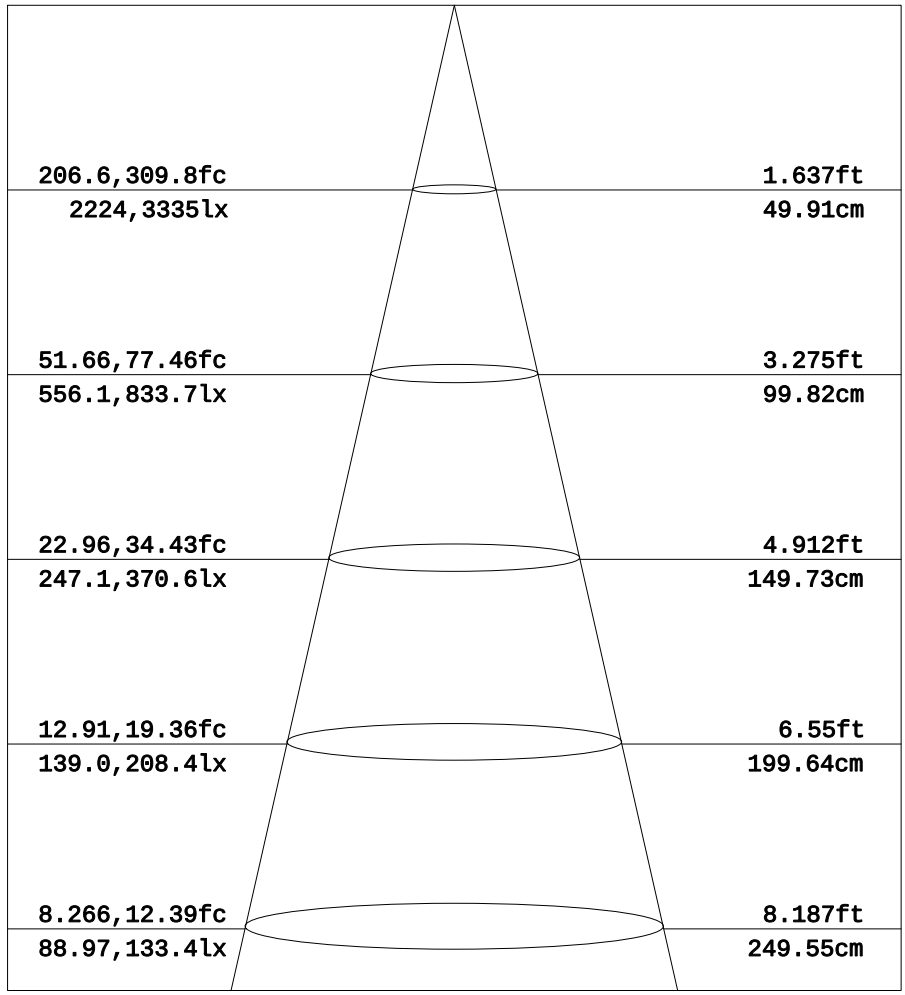

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC1
Test Date:2015-04-02

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks:

D:\我的桌面\ST-141202IES\原件\LPL-6B-36P-RGB-40°.GOS

Planar Illuminance Curve

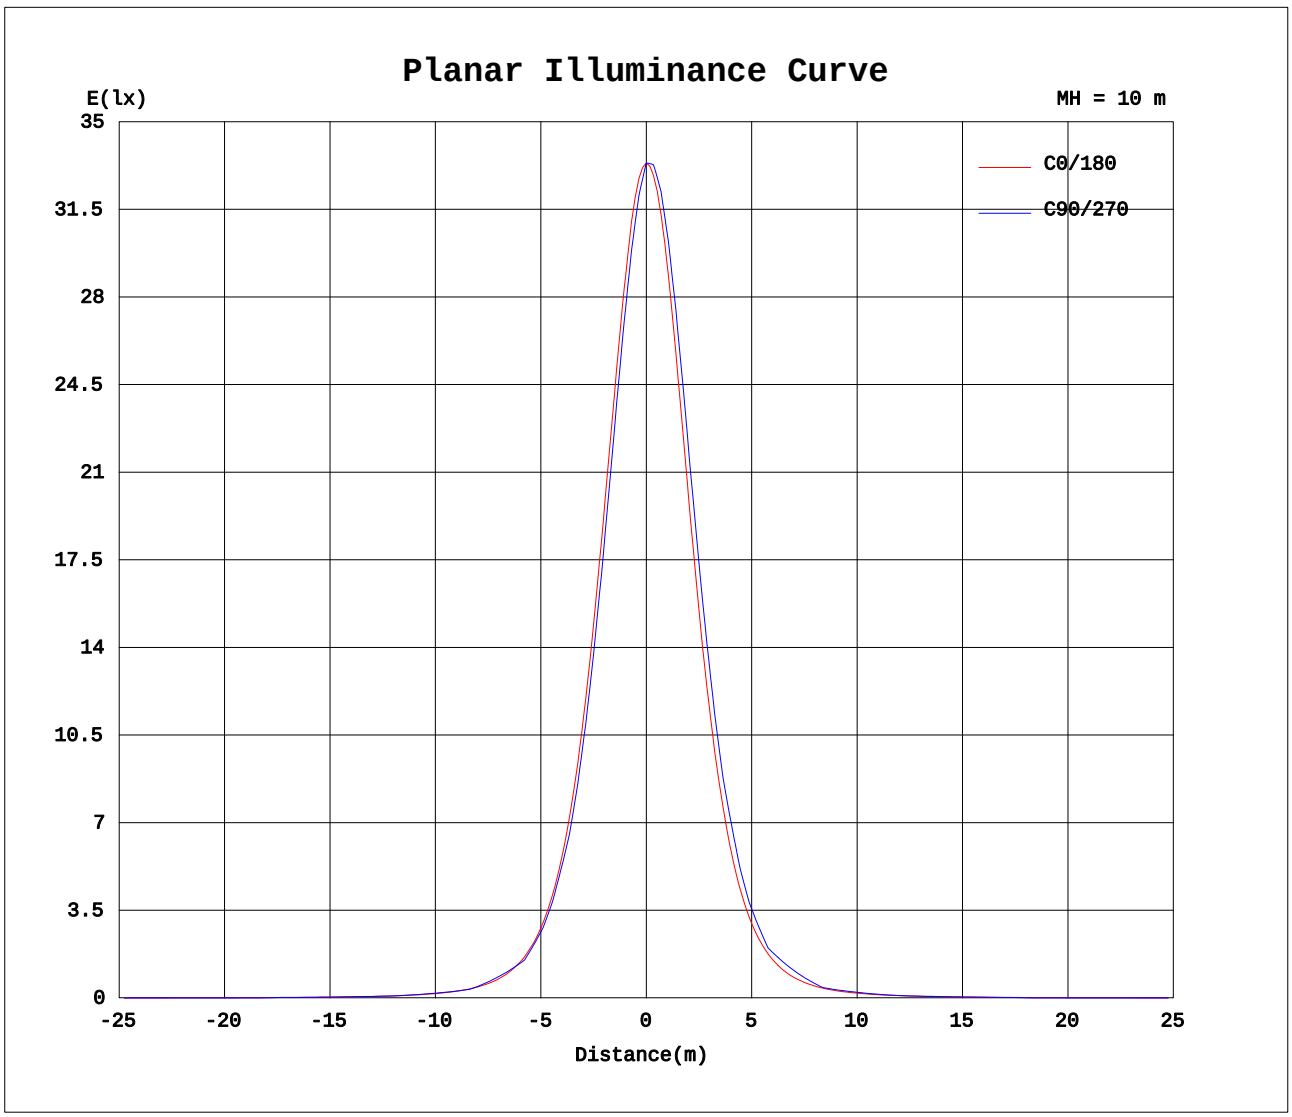

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC1
Test Date:2015-04-02

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:1.694A P:40.65W PF:1.000 Lamp Flux:1098.45x1 lm		
NAME: LED Pool Light	TYPE:36P	WEIGHT:
DIM.: D210XH188	SPEC.:24V 40°	SERIAL No.:201504006
MFR.: TPK	SUR.:	PROTECTION ANGLE:

Table--1 UNIT: cd

H(DEG) / V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.50	1.37	2.46	3.61	4.92	6.38	7.97	9.31	10.6	11.8	13.1	14.0	14.7	15.1	15.4	15.4
-55	0.00	0.00	0.10	0.80	1.88	3.21	4.67	6.37	8.22	10.1	11.9	13.7	15.6	17.4	19.1	20.4	21.4	22.0	22.1
-50	0.00	0.00	0.26	1.23	2.66	4.34	6.27	8.54	11.0	13.4	15.8	18.5	21.3	24.0	26.7	28.9	30.7	31.8	32.1
-45	0.00	0.00	0.38	1.55	3.21	5.18	7.46	10.2	13.1	16.2	19.5	23.4	27.8	32.7	37.7	42.5	46.4	49.0	49.8
-40	0.00	0.00	0.56	2.03	4.03	6.44	9.26	12.7	16.2	20.3	25.0	30.8	37.7	45.7	54.3	62.7	70.0	74.8	76.4
-35	0.00	0.00	0.68	2.31	4.50	7.19	10.4	14.2	18.6	23.8	30.3	39.1	50.5	65.3	83.2	103	122	135	139
-30	0.00	0.00	0.88	2.74	5.20	8.32	12.1	16.6	22.1	29.0	38.3	51.4	69.7	94.6	127	163	199	225	234
-25	0.00	0.00	0.99	3.01	5.72	9.14	13.3	18.3	24.7	33.2	45.4	63.6	91.0	132	187	255	323	374	391
-20	0.00	0.00	1.13	3.30	6.24	10.0	14.7	20.5	28.2	39.3	56.5	84.2	130	204	314	458	618	745	789
-15	0.00	0.00	1.23	3.50	6.63	10.6	15.6	21.9	30.7	43.7	64.8	101	164	270	438	673	941	1158	1236
-10	0.00	0.00	1.31	3.69	6.96	11.3	16.5	23.6	33.6	49.4	76.2	125	216	380	657	1063	1554	1970	2124
-5	0.00	0.01	1.36	3.80	7.17	11.6	17.0	24.4	35.2	52.4	82.5	140	247	448	798	1321	1970	2527	2743
0	0.00	0.02	1.39	3.84	7.22	11.7	17.3	24.9	36.1	54.3	87.0	149	272	504	920	1550	2340	3052	3335
5	0.00	0.01	1.38	3.84	7.24	11.7	17.3	24.9	36.1	54.2	86.6	149	271	500	908	1526	2295	2985	3245
10	0.00	0.02	1.35	3.76	6.99	11.4	16.8	24.0	34.6	51.3	80.3	135	237	428	758	1246	1848	2360	2540
15	0.00	0.01	1.29	3.61	6.82	11.1	16.3	23.2	33.0	48.3	73.7	120	204	356	611	980	1419	1785	1908
20	0.00	0.00	1.17	3.34	6.29	10.3	15.2	21.3	29.6	42.0	61.4	93.3	149	242	389	589	818	1000	1061
25	0.00	0.00	1.07	3.14	5.97	9.70	14.3	19.8	27.3	37.8	53.4	77.8	118	182	277	402	537	645	678
30	0.00	0.00	0.90	2.73	5.23	8.45	12.5	17.3	23.3	31.1	41.8	56.9	78.5	110	153	204	256	296	309
35	0.00	0.00	0.77	2.44	4.74	7.67	11.4	15.6	20.8	27.4	36.1	47.8	63.9	86.4	117	152	187	213	222
40	0.00	0.00	0.57	2.00	4.01	6.52	9.60	13.1	17.1	21.9	27.5	34.1	42.1	51.6	62.2	73.2	82.9	89.6	91.7
45	0.00	0.00	0.46	1.70	3.46	5.67	8.34	11.4	14.8	18.8	23.4	28.7	34.8	41.8	49.4	57.2	63.9	68.5	69.9
50	0.00	0.00	0.28	1.24	2.64	4.40	6.45	8.92	11.5	14.2	17.3	20.5	23.8	27.0	30.3	33.2	35.4	36.8	37.2
55	0.00	0.00	0.17	0.95	2.13	3.62	5.35	7.40	9.59	11.9	14.4	17.0	19.6	22.1	24.5	26.7	28.3	29.3	29.7
60	0.00	0.00	0.01	0.51	1.36	2.44	3.70	5.13	6.76	8.39	10.0	11.7	13.3	14.7	15.8	16.9	17.6	18.2	18.3
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC1
Test Date:2015-04-02

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks:

D:\我的桌面\ST-141202IES\原件\LPL-6B-36P-RGB-40°.GOS

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:1.694A P:40.65W PF:1.000 Lamp Flux:1098.45x1 lm		
NAME: LED Pool Light	TYPE:36P	WEIGHT:
DIM.: D210XH188	SPEC.:24V 40°	SERIAL No.:201504006
MFR.: TPK	SUR.:	PROTECTION ANGLE:

Table--2 UNIT: cd

H(DEG) / V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	15.2	14.8	14.1	13.2	12.2	11.0	9.71	8.48	7.24	5.89	4.56	3.33	2.16	1.11	0.36	0.00	0.00	0.00
-55	21.8	20.9	19.7	18.2	16.6	14.7	12.8	11.0	9.35	7.65	5.96	4.39	2.93	1.62	0.61	0.04	0.00	0.00
-50	31.6	30.2	28.2	25.7	23.2	20.3	17.4	14.8	12.5	10.3	8.05	5.99	4.07	2.38	0.98	0.10	0.00	0.00
-45	48.6	45.6	41.3	36.3	31.3	26.5	22.1	18.3	15.1	12.2	9.49	7.08	4.89	2.93	1.28	0.22	0.00	0.00
-40	74.2	68.7	60.9	52.2	43.5	35.8	29.1	23.5	18.9	15.0	11.6	8.71	6.12	3.74	1.72	0.40	0.00	0.00
-35	134	119	100.0	80.0	62.2	47.8	36.8	28.5	22.2	17.2	13.2	9.83	6.90	4.26	2.04	0.51	0.00	0.00
-30	223	195	159	122	90.2	65.9	48.5	35.9	27.0	20.6	15.5	11.5	8.07	5.05	2.52	0.67	0.00	0.00
-25	369	313	244	177	123	85.0	59.2	42.0	30.5	22.7	16.9	12.4	8.64	5.43	2.75	0.78	0.00	0.00
-20	737	604	445	302	194	123	79.3	52.8	36.5	26.2	19.1	13.8	9.65	6.11	3.16	0.92	0.00	0.00
-15	1143	916	649	419	257	154	94.2	60.2	40.2	28.2	20.3	14.5	10.1	6.42	3.32	1.00	0.00	0.00
-10	1948	1517	1031	630	361	204	117	71.1	45.6	31.0	22.0	15.5	10.8	6.86	3.56	1.10	0.00	0.00
-5	2488	1910	1270	757	420	231	129	76.1	48.0	32.2	22.6	15.9	11.0	6.97	3.62	1.14	0.00	0.00
0	3000	2270	1490	871	474	253	139	80.5	50.2	33.3	23.1	16.2	11.2	7.10	3.70	1.17	0.00	0.00
5	2913	2204	1442	846	461	248	136	79.3	49.8	33.1	23.0	16.2	11.1	7.01	3.65	1.17	0.00	0.00
10	2299	1769	1178	708	397	219	123	73.9	47.4	31.9	22.4	15.8	10.8	6.87	3.55	1.12	0.00	0.00
15	1735	1346	918	565	327	187	109	67.5	44.3	30.3	21.5	15.2	10.4	6.59	3.38	1.07	0.00	0.00
20	975	782	557	365	227	139	86.7	56.9	38.9	27.5	19.8	14.1	9.77	6.12	3.11	0.96	0.00	0.00
25	628	514	380	260	169	109	72.1	49.4	34.9	25.3	18.4	13.2	9.07	5.63	2.84	0.87	0.00	0.00
30	291	250	198	148	106	75.3	54.1	39.5	29.4	22.0	16.2	11.8	8.13	4.99	2.45	0.70	0.00	0.00
35	210	182	148	113	83.7	61.4	45.5	34.1	25.9	19.6	14.6	10.7	7.31	4.46	2.16	0.60	0.00	0.00
40	88.8	81.6	71.5	60.7	50.1	40.6	32.6	26.0	20.7	16.1	12.2	8.92	6.08	3.67	1.73	0.44	0.00	0.00
45	67.9	63.0	56.0	48.3	40.7	33.6	27.5	22.3	17.9	14.0	10.7	7.80	5.28	3.17	1.44	0.32	0.00	0.00
50	36.6	35.0	32.7	29.8	26.5	23.2	19.9	16.6	13.6	10.8	8.41	6.11	4.08	2.42	1.01	0.13	0.00	0.00
55	29.2	28.0	26.2	24.0	21.6	19.0	16.4	13.7	11.3	8.98	6.94	5.02	3.30	1.91	0.77	0.08	0.00	0.00
60	18.0	17.4	16.5	15.4	14.1	12.8	11.1	9.39	7.77	6.22	4.73	3.38	2.13	1.15	0.42	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC1
Test Date:2015-04-02

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks:

D:\我的桌面\ST-141202IES\原件\LPL-6B-36P-RGB-40°.GOS