Specification

LED Super-Flex Ribbon F21B (11.5*29mm)
RED / YELLOW / WHITE / BLUE / GREEN / WARM WHITE

Article No.		C-FR-F21B-D24V
LED Type		SMD 5050
Material		PVC-Ivory White
Working Voltage		DC24V
Rated Power / mtr		12W
LED Qty/mtr	LED	60LEDs
LED Distance	LED	1.67cm
Min. Cutting Unit		6LEDs
Min. Cutting Length		10cm
Max. Connection		20mtr
IP Rating		IP68

Optional power supply depend on length of light

Accessory	Article No.
Front Connector	F21B-FC
Middle Connector	F21B-MC
End Cap	F21B-EC
Heat-shrink Tube	F21B-HST
Aluminum U-channel	F21B-ACH1m

Separate accessories are available upon request

Stereoscopic sectional view

29

11.5

Connection diagram

Cable

Front Connector

Front Connector

Anti-skidding

Light

Light

Front Connector Cover

Front Connector

Energize from both ends

End Cap

Light

Light

Anti-skidding

Cable

Energize from one end
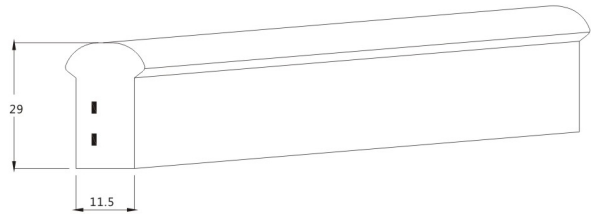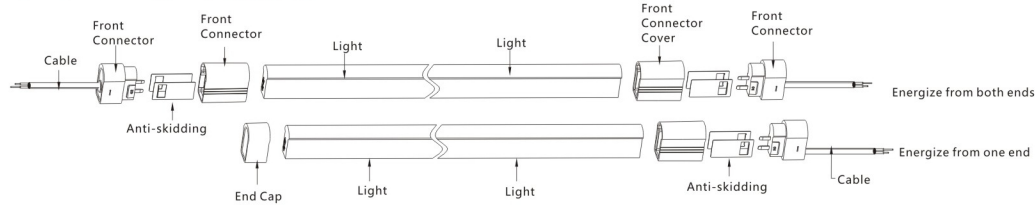
Installation instruction

Light

Screw

Aluminium profile

Aluminium profile

Screw

Screw