




## Premium 45 Extrusion

Surface Mount • IP65 Capable

The angled profile of the Universal Extrusion requires 3/4" clearance along each side of a 90 degree corner. Use for applications such as accent lighting, display shelving and cases, as well as niche and exterior lighting. Choose from frosted UV resistant/flame retardant lens or 10° clear focusing lens, both made of high quality polycarbonate material. Use End Caps made of durable polypropylene to finish the look. Standard assembly listed offers IP20 protection; Use a neutral cure silicone sealant at each end and along each side of lens for IP65 rating. *Mounting suggestions: Secure using **E-CLIP-45** Mounting bracket, construction adhesive, or 3M® double-sided adhesive tape. See pages 28-31 for installation tips and suggestions.*

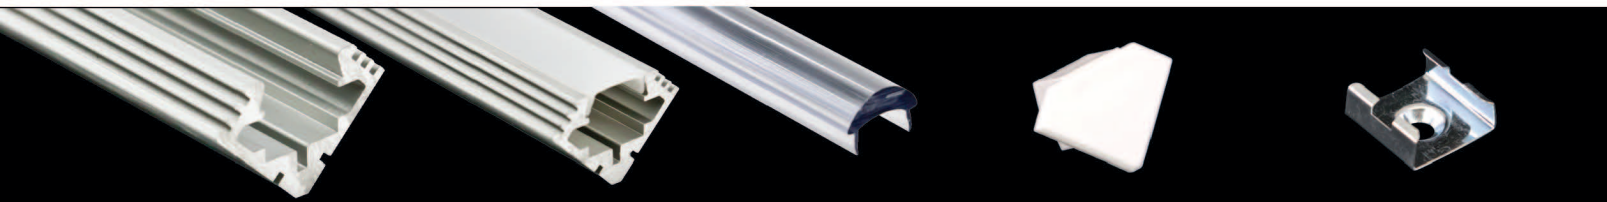

### PE-AA45-1M

39.4" length, Anodized  
Aluminum Extrusion

### PE-UVLENS-1M

Frosted PC\* UV Lens  
(shown in extrusion)

### PE-AA45-END

1/16" White PP\* End Cap

### E-CLIP-45

Zinc Mounting  
Bracket

### PE-FOCLENS-1M

Clear PC\* Focusing Lens  
(shown without extrusion)

\*PC = Polycarbonate

\*PP = Polypropylene

Lenses and Caps Sold Separately  
Each end cap adds 1/16" to  
overall finished length