

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		4545.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of I _{max} At 50% of I _{max} At 90% of I _{max}	54.2V x 40.4H 35.0V x 12.3H 14.4V x 4.2H
Beam Flux	Total To 10% of I _{max} To 50% of I _{max} To 90% of I _{max}	999.8 lumens per klm. 722.3 lumens per klm. 340.8 lumens per klm. 57.8 lumens per klm.
	Upward LOR Downward LOR	0.0 % 100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:qcl
Test Date:2017-06-22

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:241.2V I:0.1209A P:15.90W PF:0.5454 Lamp Flux:478.264x1 lm		
NAME: LWW-W80A-16P-DMX-W	TYPE:LWW	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:17050020
MFR.: TPK	SUR.:	PROTECTION ANGLE:

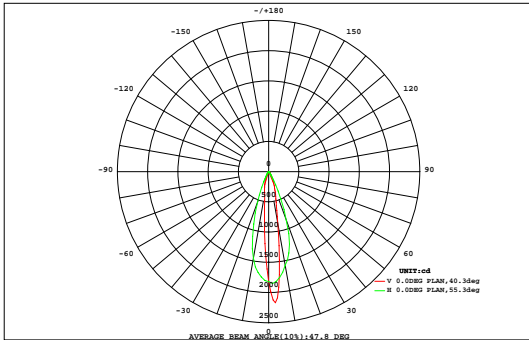

DATA OF LAMP		Eff:30.08lm/W	
MODEL	LWW-W80A-16P-DMX-W	Imax(cd)	2174
NOMINAL POWER(W)	15	AVAILABILITY(%)	72.3
RATED VOLTAGE(V)	240	Avai. FLUX(lm)	345.7
NOMINAL FLUX(lm)	478.264	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	478.3
TEST VOLTAGE(V)	241.4	θ @10%(H,V)	40,54DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm	Φ t	Φ a	
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.03	0.07	0.14	0.23	0.32	0.42	0.49	0.52	0.50	0.42	0.33	0.23	0.12	0.05	0.01	0.00	3.89	0.00
40	0.00	0.01	0.04	0.10	0.19	0.31	0.51	0.74	0.91	0.96	0.90	0.73	0.50	0.31	0.17	0.07	0.02	0.00	6.48	0.00
30	0.00	0.01	0.05	0.13	0.25	0.44	0.89	1.58	2.38	2.78	2.12	1.41	0.80	0.44	0.24	0.10	0.02	0.00	13.7	0.00
20	0.00	0.01	0.06	0.16	0.30	0.60	1.50	3.22	8.18	12.8	5.27	2.58	1.19	0.59	0.30	0.12	0.03	0.00	37.0	19.7
10	0.00	0.02	0.07	0.17	0.35	0.76	2.24	5.69	20.2	37.5	10.8	4.10	1.58	0.72	0.35	0.14	0.03	0.00	84.8	71.0
0	0.00	0.02	0.07	0.18	0.36	0.82	2.69	7.60	27.0	51.2	14.5	5.07	1.80	0.79	0.38	0.15	0.03	0.00	113	101
-10	0.00	0.02	0.07	0.18	0.36	0.81	2.61	7.33	26.3	47.5	13.2	4.73	1.76	0.79	0.38	0.15	0.03	0.00	106	93.9
-20	0.00	0.01	0.07	0.17	0.33	0.70	2.06	4.99	16.5	28.6	8.42	3.42	1.47	0.70	0.35	0.14	0.03	0.00	67.9	52.7
-30	0.00	0.01	0.06	0.15	0.28	0.55	1.34	2.70	5.45	7.44	3.88	2.12	1.11	0.57	0.29	0.12	0.03	0.00	26.1	7.91
-40	0.00	0.01	0.04	0.12	0.23	0.40	0.77	1.27	1.64	1.83	1.63	1.16	0.74	0.44	0.24	0.09	0.02	0.00	10.6	0.00
-50	0.00	0.00	0.03	0.09	0.17	0.28	0.43	0.59	0.71	0.75	0.73	0.61	0.45	0.30	0.17	0.06	0.01	0.00	5.39	0.00
-60	0.00	0.00	0.02	0.06	0.11	0.18	0.25	0.33	0.39	0.41	0.39	0.34	0.27	0.19	0.11	0.04	0.01	0.00	3.10	0.00
-70	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.05	0.06	0.05	0.05	0.04	0.03	0.01	0.01	0.00	0.00	0.43	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.00	0.12	0.61	1.58	3.09	6.11	15.7	36.5	110	192	62.4	26.8	12.0	6.09	3.11	1.25	0.27	0.02	478	---
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	14.7	98.1	182	47.2	3.98	0.00	0.00	0.00	0.00	0.00	0.00	---	346


one-half-peak spread: U:17.7,D:17.5 , L:6.6,R:5.NEMA Beam Type: Type 3 x 4 (H x V)

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:qcl
 Test Date:2017-06-22

V(B) Range:-60 - 60DEG
 V(B) Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:65.0%
 Test Distance:8.100m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:241.2V I:0.1209A P:15.90W PF:0.5454 Lamp Flux:478.264x1 lm		
NAME: LWL-W80A-16P-DMX-W	TYPE:LWW	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:17050020
MFR.: TPK	SUR.:	PROTECTION ANGLE:

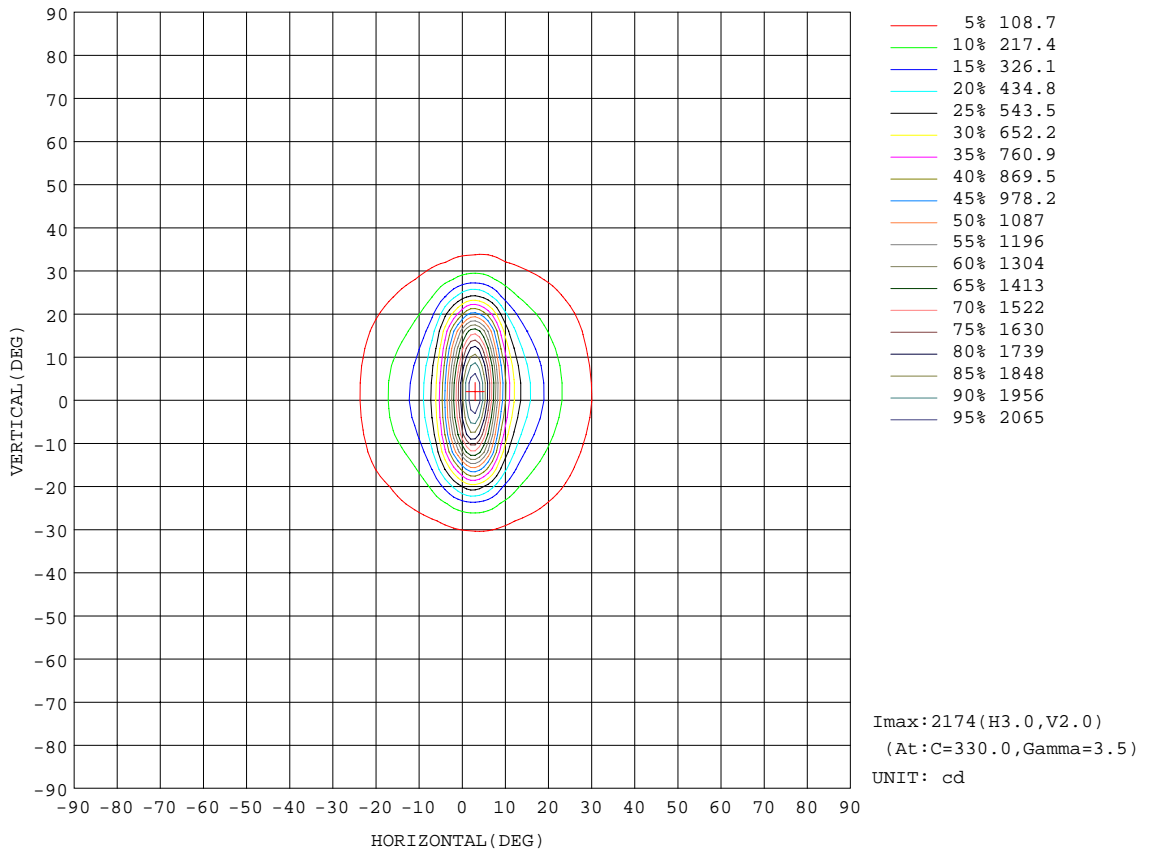


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:qcl
 Test Date:2017-06-22

V(B) Range:-60 - 60DEG
 V(B) Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:65.0%
 Test Distance:8.100m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:241.2V I:0.1209A P:15.90W PF:0.5454 Lamp Flux:478.264x1 lm		
NAME: LWW-W80A-16P-DMX-W	TYPE:LWW	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:17050020
MFR.: TPK	SUR.:	PROTECTION ANGLE:

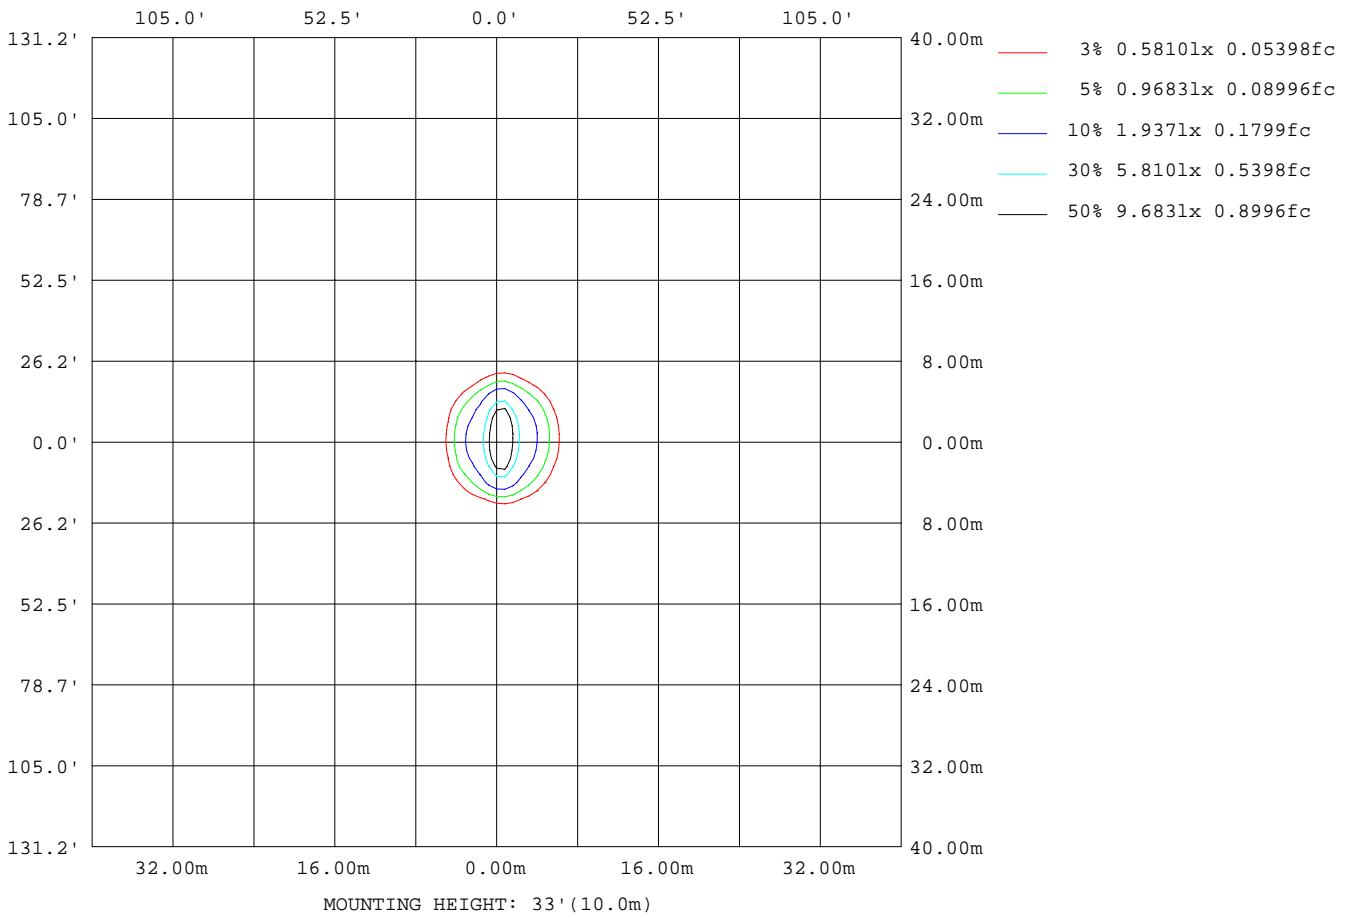


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:qcl
 Test Date:2017-06-22

V(B) Range:-60 - 60DEG
 V(B) Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:65.0%
 Test Distance:8.100m [K=1.0000]
 Remarks:

AAI Figure

Test:U:241.2V I:0.1209A P:15.90W PF:0.5454 Lamp Flux:478.264x1 lm		
NAME: LWL-W80A-16P-DMX-W	TYPE:LWW	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:17050020
MFR.: TPK	SUR.:	PROTECTION ANGLE:

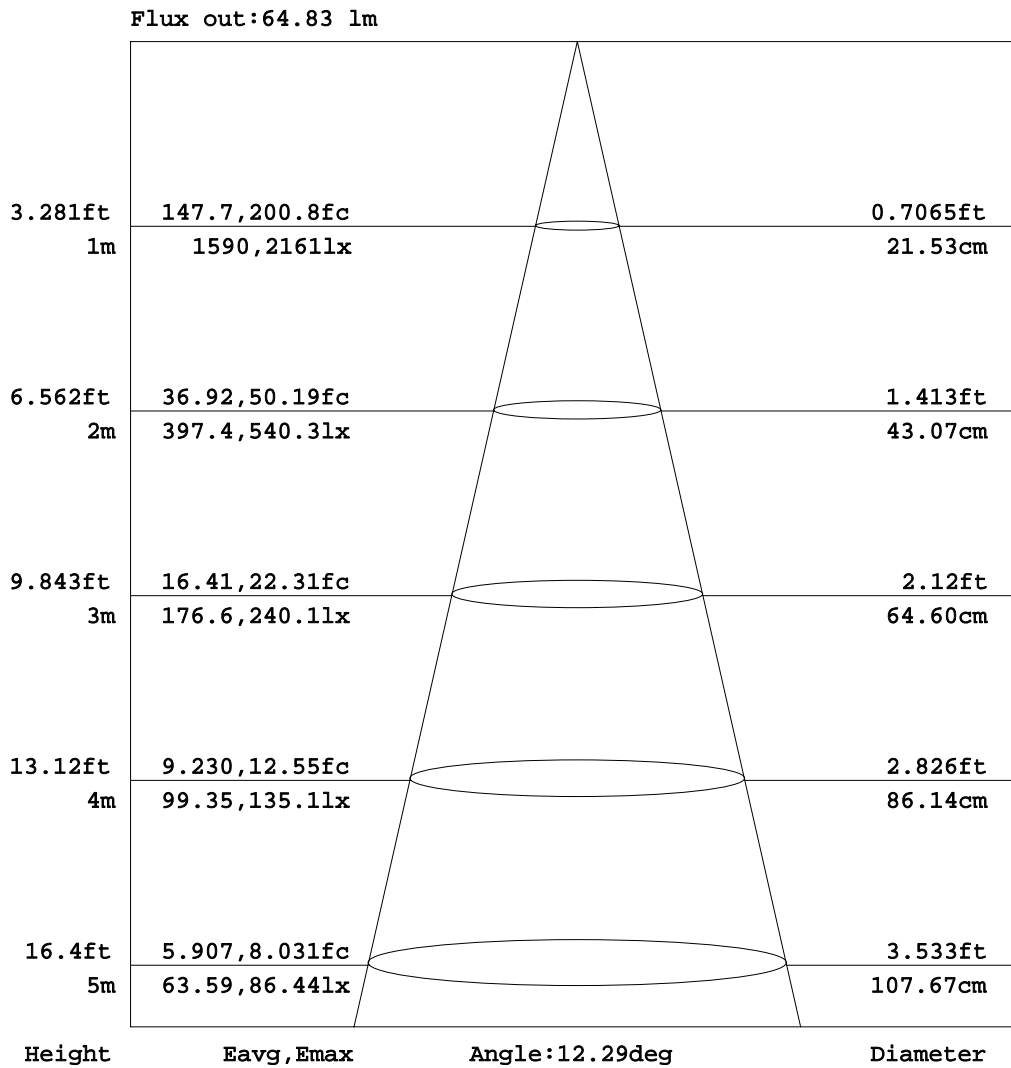


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:qcl
Test Date:2017-06-22

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks:

Planar Illuminance Curve

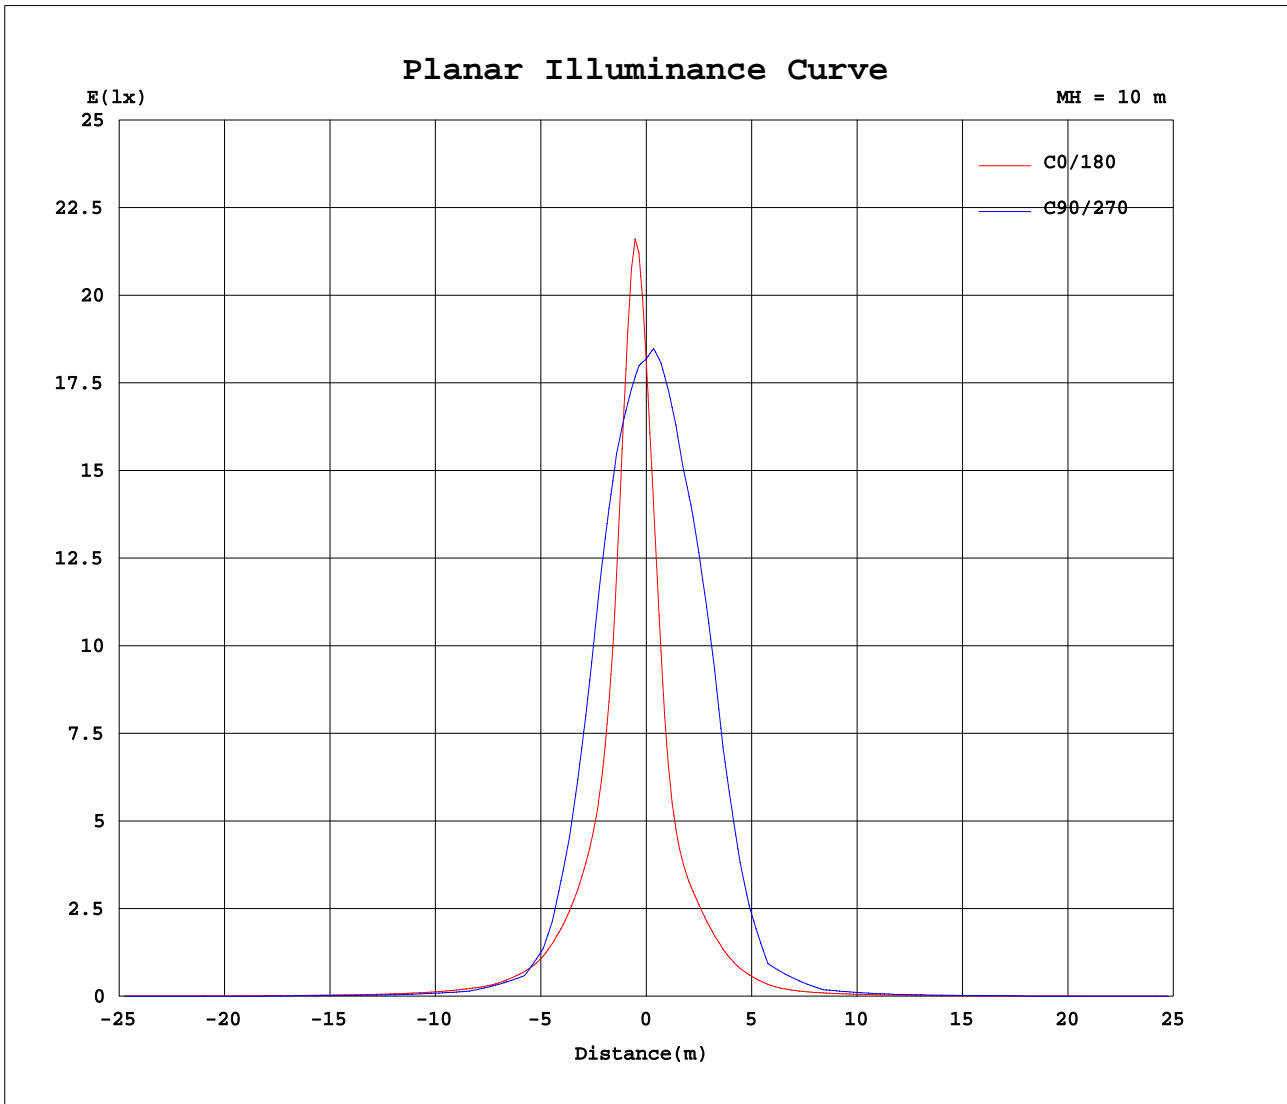

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:qcl
 Test Date:2017-06-22

V(B) Range:-60 - 60DEG
 V(B) Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:65.0%
 Test Distance:8.100m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.2V I:0.1209A P:15.90W PF:0.5454 Lamp Flux:478.264x1 lm		
NAME: LWW-W80A-16P-DMX-W	TYPE:LWW	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:17050020
MFR.: TPK	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.04	0.30	0.75	1.40	2.17	3.07	3.87	4.69	5.52	6.28	7.03	7.72	8.41	9.04	9.46	9.70
-55	0.00	0.00	0.00	0.15	0.52	1.09	1.90	2.94	3.99	4.97	5.95	6.91	7.86	8.85	9.81	10.8	11.6	12.2	12.6
-50	0.00	0.00	0.00	0.31	0.84	1.59	2.65	4.10	5.38	6.61	7.83	9.01	10.2	11.6	12.9	14.3	15.4	16.4	17.0
-45	0.00	0.00	0.03	0.42	1.07	2.02	3.32	4.77	6.17	7.64	9.13	10.7	12.5	14.8	17.2	19.3	21.0	22.5	23.5
-40	0.00	0.00	0.06	0.58	1.43	2.65	4.31	5.79	7.36	9.18	11.1	13.2	15.9	19.5	23.5	26.7	29.4	31.6	33.3
-35	0.00	0.00	0.12	0.73	1.73	3.16	4.83	6.45	8.21	10.1	12.4	15.3	19.8	26.2	33.4	40.5	46.0	51.4	56.5
-30	0.00	0.00	0.20	0.97	2.18	3.92	5.61	7.45	9.48	11.6	14.3	18.5	25.6	36.2	48.2	61.3	70.9	81.1	91.2
-25	0.00	0.00	0.24	1.14	2.61	4.27	6.09	8.11	10.3	12.6	15.7	20.8	30.2	45.8	64.1	85.3	108	146	190
-20	0.00	0.00	0.36	1.44	2.96	4.71	6.68	8.89	11.3	14.0	17.6	24.2	36.8	59.5	88.8	123	176	309	547
-15	0.00	0.00	0.44	1.66	3.13	4.97	7.05	9.36	11.9	14.9	18.9	26.5	41.6	69.8	110	156	229	464	901
-10	0.00	0.00	0.59	1.78	3.32	5.25	7.39	9.85	12.6	15.9	20.3	28.9	47.8	82.5	139	211	311	659	1458
-5	0.00	0.00	0.60	1.83	3.43	5.40	7.60	10.1	12.9	16.4	21.1	30.3	50.8	89.7	152	242	357	750	1677
0	0.00	0.00	0.63	1.88	3.50	5.49	7.73	10.3	13.1	16.7	21.5	31.0	52.6	94.7	163	264	394	807	1818
5	0.00	0.00	0.62	1.88	3.50	5.50	7.73	10.3	13.1	16.7	21.5	31.1	52.7	94.1	162	260	387	792	1820
10	0.00	0.00	0.62	1.84	3.43	5.39	7.60	10.1	12.9	16.3	21.0	30.3	50.2	87.4	147	228	343	695	1573
15	0.00	0.00	0.59	1.80	3.36	5.30	7.47	9.92	12.6	15.9	20.4	29.3	47.3	80.2	132	197	299	626	1386
20	0.00	0.00	0.54	1.69	3.17	5.02	7.08	9.37	11.9	14.9	19.0	26.4	40.5	65.8	103	146	215	435	857
25	0.00	0.00	0.49	1.59	3.02	4.80	6.77	8.95	11.3	14.1	17.8	24.1	35.6	56.2	82.9	115	161	283	501
30	0.00	0.00	0.43	1.43	2.71	4.32	6.13	8.10	10.2	12.6	15.5	20.0	27.8	40.7	56.0	73.8	93.0	119	144
35	0.00	0.00	0.36	1.27	2.48	3.96	5.65	7.48	9.44	11.6	14.2	17.9	24.0	33.7	45.2	58.0	71.0	87.5	103
40	0.00	0.00	0.26	1.04	2.13	3.43	4.93	6.54	8.26	10.1	12.2	14.7	18.3	23.2	29.0	34.2	38.1	40.7	42.6
45	0.00	0.00	0.20	0.90	1.87	3.04	4.40	5.87	7.43	9.08	10.9	12.9	15.7	19.3	23.5	27.4	30.3	32.3	33.8
50	0.00	0.00	0.12	0.68	1.49	2.46	3.60	4.88	6.18	7.54	8.89	10.3	11.8	13.5	15.3	17.0	18.6	19.7	20.5
55	0.00	0.00	0.07	0.52	1.22	2.07	3.05	4.14	5.27	6.46	7.64	8.83	10.1	11.4	12.8	14.2	15.3	16.3	16.8
60	0.00	0.00	0.00	0.30	0.81	1.48	2.22	3.03	3.90	4.84	5.77	6.66	7.53	8.32	9.08	9.85	10.5	11.0	11.3
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:qcl
Test Date:2017-06-22

V(B) Range:-60 - 60DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.2V I:0.1209A P:15.90W PF:0.5454 Lamp Flux:478.264x1 lm		
NAME: LWW-W80A-16P-DMX-W	TYPE:LWW	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:17050020
MFR.: TPK	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(β) V(β)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	9.91	9.96	9.91	9.61	9.33	8.90	8.29	7.56	6.60	5.52	4.35	3.03	2.06	1.49	0.96	0.49	0.14	0.00
-55	12.9	13.0	12.8	12.5	11.9	11.3	10.5	9.57	8.46	7.10	5.67	4.13	2.66	1.75	1.11	0.56	0.15	0.00
-50	17.4	17.5	17.3	16.8	15.8	14.9	13.9	12.6	11.2	9.46	7.66	5.78	3.57	2.14	1.35	0.67	0.17	0.00
-45	24.1	24.2	24.0	23.0	21.1	19.2	17.5	15.3	13.5	11.3	9.21	6.93	4.54	2.55	1.50	0.76	0.21	0.00
-40	34.2	34.3	34.1	32.3	29.1	25.7	22.8	19.4	16.8	14.1	11.5	8.65	6.00	3.16	1.74	0.88	0.27	0.00
-35	58.8	56.1	52.2	46.4	39.5	33.6	28.1	23.4	19.5	16.0	13.0	9.84	6.85	3.89	1.93	0.92	0.27	0.00
-30	95.7	88.8	79.3	67.5	55.1	45.5	36.0	29.4	23.4	18.8	15.2	11.6	8.12	4.98	2.20	0.98	0.26	0.00
-25	195	151	115	92.0	70.7	55.6	41.6	32.9	25.7	20.2	16.4	12.7	8.79	5.42	2.59	1.07	0.29	0.00
-20	545	306	188	136	97.3	70.3	49.6	38.0	29.0	22.7	18.5	14.3	10.0	6.27	3.20	1.28	0.24	0.00
-15	931	452	250	169	116	79.8	54.7	41.4	31.0	24.2	19.7	15.1	10.6	6.66	3.36	1.53	0.31	0.00
-10	1481	670	349	226	146	94.5	62.6	45.6	34.1	26.2	20.9	16.1	11.3	7.14	3.58	1.64	0.41	0.00
-5	1682	766	409	260	163	102	66.3	47.9	35.2	27.0	21.5	16.5	11.5	7.27	3.65	1.68	0.49	0.00
0	1920	880	469	293	178	109	69.2	49.6	36.3	27.5	21.9	16.7	11.7	7.43	3.74	1.69	0.48	0.00
5	1914	890	468	294	178	108	68.2	49.1	35.7	27.2	21.8	16.5	11.6	7.36	3.70	1.69	0.49	0.00
10	1713	800	422	269	167	102	65.8	47.0	34.3	26.4	21.1	16.1	11.3	7.22	3.62	1.66	0.47	0.00
15	1474	677	360	232	150	94.1	61.3	44.3	32.7	25.2	20.3	15.5	10.9	6.95	3.46	1.62	0.47	0.00
20	911	454	256	176	119	80.6	53.9	40.1	29.8	23.4	19.0	14.5	10.3	6.50	3.25	1.53	0.43	0.00
25	516	290	185	136	96.3	68.4	47.6	35.9	27.5	21.6	17.6	13.6	9.56	5.95	3.06	1.48	0.44	0.00
30	149	126	103	86.7	66.9	52.0	38.3	29.8	23.8	19.0	15.4	12.2	8.51	5.26	2.76	1.35	0.37	0.00
35	107	92.8	78.7	67.8	54.2	43.1	33.0	26.0	21.1	17.0	13.9	10.9	7.68	4.73	2.52	1.26	0.36	0.00
40	43.2	42.7	41.6	39.4	35.0	29.7	24.9	20.4	17.1	14.0	11.6	8.92	6.44	3.94	2.17	1.11	0.34	0.00
45	34.3	34.0	33.2	31.6	28.4	24.6	21.2	17.7	15.0	12.4	10.2	7.84	5.60	3.44	1.95	0.99	0.28	0.00
50	20.9	20.9	20.6	19.9	18.4	16.9	15.5	13.6	12.0	10.0	8.14	6.22	4.33	2.70	1.63	0.81	0.21	0.00
55	17.1	17.2	16.9	16.3	15.3	14.2	13.1	11.6	10.3	8.59	6.89	5.20	3.61	2.33	1.43	0.71	0.19	0.00
60	11.5	11.5	11.4	11.0	10.6	10.0	9.48	8.69	7.67	6.41	5.00	3.66	2.54	1.78	1.13	0.56	0.17	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:qcl
Test Date:2017-06-22

V(β) Range:-60 - 60DEG
V(β) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:65.0%
Test Distance:8.100m [K=1.0000]
Remarks: