



Features

- Push-to-reset circuit breaker on the output
- Dimmable with magnetic low-voltage dimmers
- ETL listed
- CSA listed
- UL standard 8750

	/ĽTĺ:\	
С	(I)	ีบร

Max Load	200W	
Input Voltage	120V 60Hz	
Input Current Full Load	2.13A	
Output Voltage Full Load	11.3V	
Max Output Current Full Load	15.6A	
Open Circuit Output Voltage	12.9V	
Efficiency	87%	
Power Factor	0.92	
Coil Former	Double Section Bobbin	
Thermal Class	B130°C	
Leads Primary	PVC 600V #18	
Leads Secondary	PVC 300V#12	
Height	9.8"	
Width	3"	
Depth	3"	
Weight	87 Oz.	

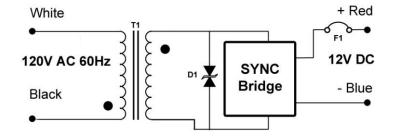



Phone: 818-988-2122 Fax: 818-755-4025 | 7404 Fulton Ave., Unit #1, North Hollywood, CA 91605 info@magnitudeinc.com | www.magnitudeinc.com