




Helm Extrusion

Recessed Mount • IP65 Capable


The Helm Extrusion is designed for outdoor applications, such as building facades, terraces, and path markings; and for tile floors. Designed to withstand standard loads with a frosted polycarbonate lens for UV protection. Lens does not clip/slide in like other extrusions and must be secured using a silicone sealant. Use End Caps made of durable polypropylene to finish the look. Standard assembly listed offers IP20 protection; Use a neutral cure silicone sealant at each end and along each side of lens for IP65 rating. For use in environments where wet surfaces would exist, such as bathrooms and pool areas.

Mounting suggestions: Secure using a construction adhesive or ceramic glue. See pages 28-31 for installation tips and suggestions. (For in-ground installation or for areas with exposure to moisture or heavy loads, special order products may be needed such as polystyrene foam board, sealants, or adhesives; please consult a professional installer.)

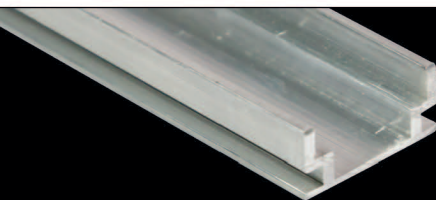

PE-HELM-1M

39.4" length
Aluminum Extrusion

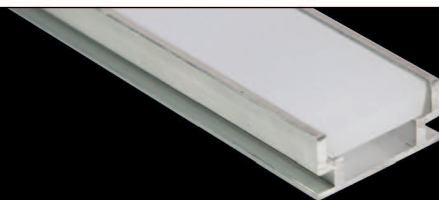

PE-HELM-1M

Frosted PC* UV Paver Lens (shown
in extrusion)



PE-HELM-END

7/16" White PP* End Cap

Lenses and Caps Sold Separately
Each end cap adds 7/16" to
overall finished length

*PC = Polycarbonate

*PP = Poly propylene