

LED FLEXBRITE CUSTOM CUT



UL Listed and custom cut to your specifications

LED FLEXBRITE CUSTOM CUT

Custom cut lengths (to the nearest 3 foot length) offer UL 2388 compliance. Save 82% in energy usage compared to incandescent. Great for accent lighting, decorative lighting, outlines, architectural details, patios, decks, gazebos and more.

FEATURES

- Indoor/outdoor rated
- Cost effective lighting for a variety of applications
- Produces virtually no heat for maximum safety
- Power cord and end cap connections are made at the factory per order for UL compliance (order one conkit for each non-extendable run up to 150 feet)
- Order to the nearest cutting increment – every 36" for Cool White and Ultra Warm White
- Highest quality PVC with UV inhibitor to maximize life and performance

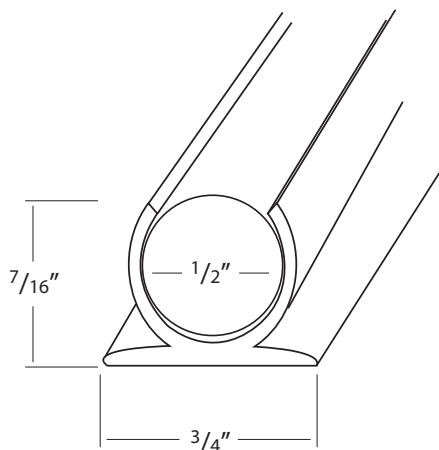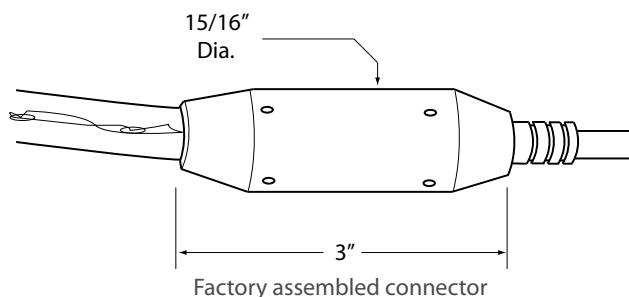

BILL OF MATERIALS

- ☐ Determine length needed to the nearest 3 foot cutting increment
- ☐ Order one ULRL-CONKIT-LED SHELL for each non-extendable run up to 150 feet
- ☐ Order mounting track for straight runs (recommended) and mounting clips as needed



Cool White (CW)



Ultra Warm White (UWW)

CUSTOM CUT

ULRL-LED	—	
UL2388 120V LED Flexbrite		CW-CC = Cool White (6400K) UWW-CC = Ultra Warm White (2700K)


For full reels, order 150 feet ULRL-LED-(COLOR)-150 and 5 LED-DL-CONKIT-1.6AMP and 50 DL-CLIP/SCREW (included in price of reel).

ACCESSORIES



ULRL-CONKIT-LEDSELL

UL Listed factory-assembled connector kit for use with CUSTOM CUT 120V 1/2" Rope Light only



DL-TRACK-4

Four foot clear mounting track with UV rating for outdoors; recommended for use with straight line installations



DL-CLIP/SCREW

Clear "U" shaped mounting clip that securely holds rope light in place

TECHNICAL SPECIFICATIONS

Voltage	120V, 60Hz AC operation (1.6A inverter on cord converts AC power to DC for LEDs)
Construction	Heat resistant clear PVC housing with LEDs every 1", vertical mount
Mounting	Plastic mounting clips or track
Dimensions	1/2" diameter
Cuttability	Every 3 feet
Light Output	CW = 6.3 lumens per foot, UWW = 5.5 lumens per foot
Wattages	0.77 watt per foot
Maximum run	150 feet
Switching	Provide switched outlet for On/Off control
Linking	Custom cuts are not linkable. Cutting, splicing or repairing LED Flexbrite custom cuts voids UL
LED specs	60,000 hours average LED life, UWW (2700K) CRI = 73; CW (6400K) CRI = 80; .067 watt, 1.11V, 60mA, 3mm, 120° beam angle
Dimmers	Switched wall outlets cannot be used with wall dimmers per the NEC. Dimmable with most CFL/LED and low voltage electronic dimmers (minimum loads may apply).
Diffuser	Clear PVC jacket
Packaging	Boxed



P

