




Paver Extrusion

Recessed Mount • IP65 Capable

The Paver premium extrusion is durable and sturdy, resistant to static loads up to 4,000 pounds when installed over a polystyrene base foam board and professionally sealed. The best suited applications are outdoor sidewalks, driveways, parking lots, building facades, terraces and patios. Frosted polycarbonate lens does not clip/slide in like other extrusions and must be secured using a silicone sealant. Use End Caps made of durable polypropylene to finish the look. Standard assembly listed offers IP20 protection; Use a neutral cure silicone sealant at each end and along each side of lens for IP65 rating. **Mounting suggestions:** *Secure using a construction adhesive, frost resistant/elastic ceramic glue, or cement over a polystyrene base foam board. See pages 28-31 for installation tips and suggestions. (For in-ground installation or for areas with exposure to moisture or heavy loads, special order products may be needed such as polystyrene foam board, sealants, or adhesives; please consult a professional installer.)*

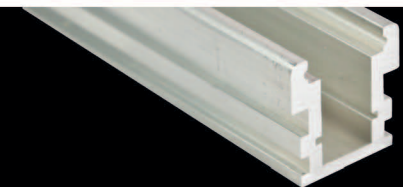

PE-PAVER-1M

39.4" length
Aluminum Extrusion



PE-PAVERLENS-1M

Frosted PC* UV Helm Lens
(shown in extrusion)



PE-PAVER-END

1/16" White PP* End Cap

Lenses and Caps Sold Separately
Each end cap adds 1/16" to
overall finished length

*PC = Polycarbonate

*PP = Poly propylene