




Cut out required: 40mm

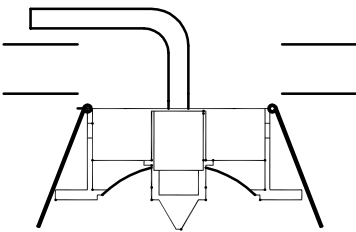

(1) Gently hold fibre optic tail in hand and screw on fitting.

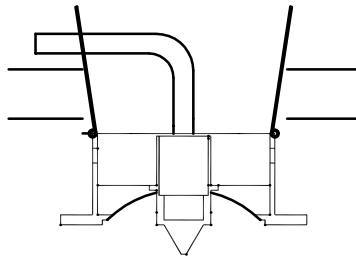

(2) Bend back the springs and push fitting into cut out hole.

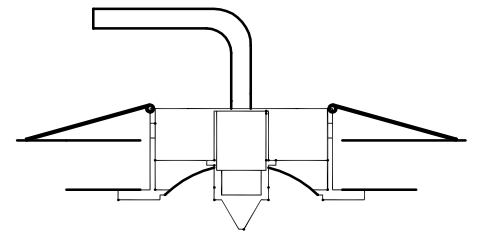

(3) Springs hold fitting in place