

# LINEAR - WARM WHITE

High power Warm White LEDs combined with a durable aluminum housings rated for wet locations constitute this family of lighting tools for high impact illumination, indoors or outdoors.

## Performance

- 3500K Warm White LED light with 80 CRI washes surfaces with energy efficient light that looks like halogen
- LED Wall Washers have a 25° beam angle and emit up to 2600 lumens
- Long life high power LEDs last up to 60,000 hours, reducing maintenance costs


## Construction

- Durable aluminum alloy housing with enamel finish
- Housing and base with built-in driver are fully sealed for use in wet locations (IP65)

## Installation

- Easy to install - each unit has its own five foot grounded power cord
- Integrated mounting holes in base/leg brackets and adjustable tilt design maximize on-site flexibility
- Use GFCI weatherproof outlet for outdoor installations

## Photometrics (for 36x1)

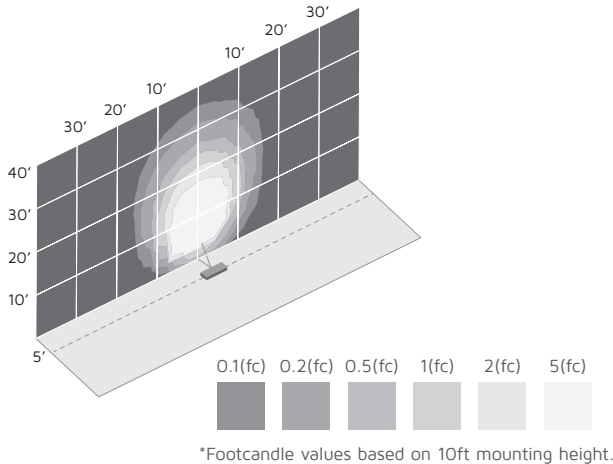

## Specifications

Series	LLW-WHITE
Input voltage	120V, 60Hz AC
Color temperature	3500K
CRI	80+
Wattage	16W / 32W / 48W
Lumens	850Lm / 1700Lm / 2600Lm
Maximum run	Power cannot be linked
Beam angle	25°
Housing	Die-cast aluminum alloy
Lens	Tempered glass
Rating	N/A
Dimensions	See individual product
Mounting	Wall or ground via brackets
Linking	Up to 30 units for signal
LED type	24 or 36 x BridgeLUX LEDs
Rated life	60,000 hrs

## LED Linear Wall Washer



**LLW16-WW**  
LED Linear - 32  
16W / 850Lm  
15.75"L x 2-3/16"W x 5"H



**LLW32-WW**  
LED Linear - 32  
32W / 1700Lm  
31.5"L x 2-3/16"W x 5"H



**LLW48-WW**  
LED Linear - 48  
48W / 2600Lm  
47.25"L x 2-3/16"W x 5"H

## Building a System

For WW, select sizes and quantities and plan to provide an outlet location (GFCI for outdoor fixtures) within five feet of each fixture.